

## Digital Fiber Sensor

**FX-500 SERIES Ver.2**FIBER  
SENSORSLASER  
SENSORSPHOTOELECTRIC  
SENSORSMICRO  
PHOTOELECTRIC  
SENSORSAREA  
SENSORSSAFETY LIGHT  
CURTAINS/  
SAFETY COMPONENTSPRESSURE /  
FLOW  
SENSORSINDUCTIVE  
PROXIMITY  
SENSORSPARTICULAR  
USE SENSORSSENSOR  
OPTIONSSIMPLE  
WIRE-SAVING  
UNITSWIRE-SAVING  
SYSTEMSMEASUREMENT  
SENSORSSTATIC  
CONTROL  
DEVICESLASER  
MARKERS

PLC

HUMAN MACHINE  
INTERFACESENERGY  
MANAGEMENT  
SOLUTIONS

FA COMPONENTS


MACHINE VISION  
SYSTEMSUV CURING  
SYSTEMS

## Related Information

- General terms and conditions ..... F-3
- Selection guide ..... P.3~
- Fiber selection ..... P.5~
- SC-GU3 ..... P.971~
- Glossary of terms ..... P.1549~
- General precautions ..... P.1552~
- Korea's S-mark ..... P.1602

**Ver.2**

\* There is no change in Model No. and price due to version upgrade.  
 \* Cover opened state is shown.

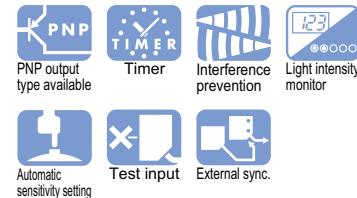[panasonic.net/id/pidsx/global](http://panasonic.net/id/pidsx/global)
**At the industry's leading edge****Improved the operability and visibility of the operation keys**


Operation keys (setting switch and MODE key) have been renewed to be easy to operate. Also, the color of the keys has been changed from black to light gray to achieve good visibility in dim light.

**High stability!**

When the FX-500 series is used together with our super quality fiber, the incident light intensity variation among units is decreased to only 1/4 of that of conventional models.

By being close to absolute values instead of modified digital values, changes in detection that could not be found in the past can now be monitored.


 Selection Guide  
 Fibers  
 Fiber Amplifiers  
 Other Products

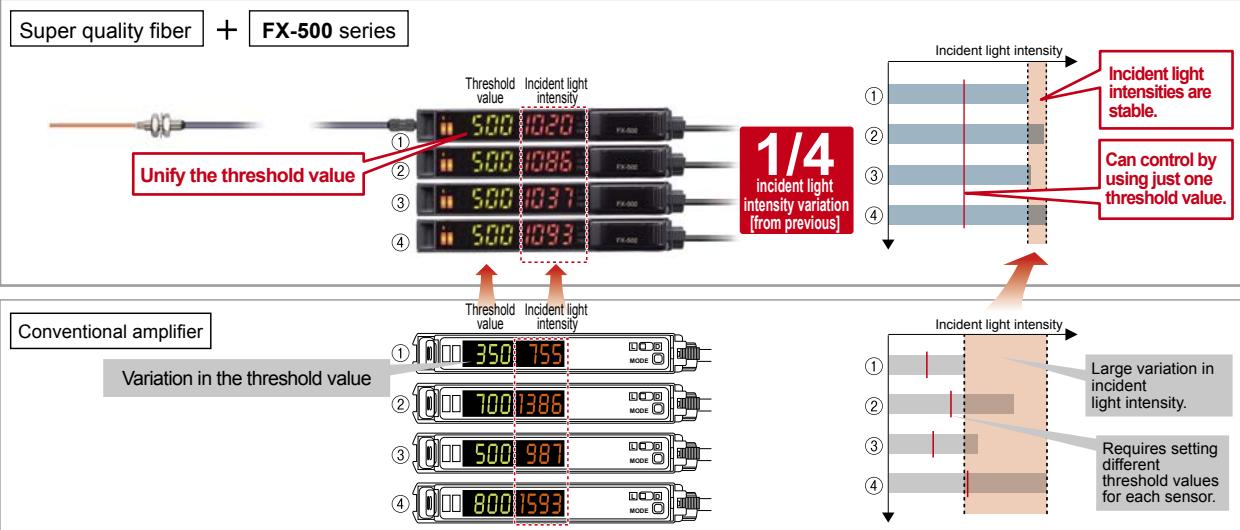 FX-500  
 FX-550  
 FX-100  
 FX-410


## A quality that surpassed that of standard fibers!

New fibers developed using a new manufacturing method adopted by our own factory along with a persistent quality control system.

The basic performance of a standard fiber is greatly enhanced!

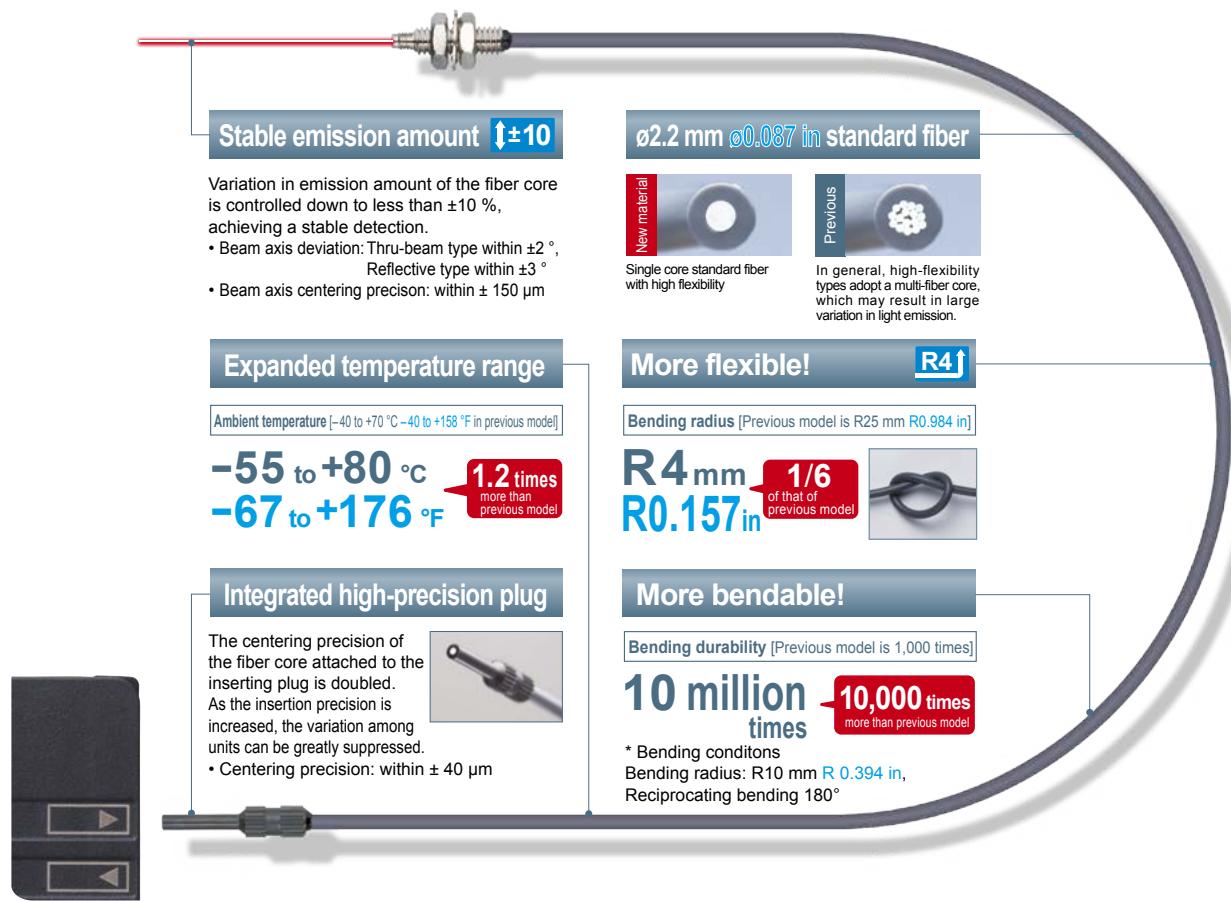

## Max. 25 $\mu\text{s}$ response time

FX-500 with its high response time contributes to improve productivity.




Performing minute object detection when using a small diameter fiber is now possible with a high response time and longer sensing range.


## So accurate! Sharp detection with suppressed hysteresis

FX-500 with its accurate detection catches fractional differences in light intensity, achieving high precision and solving low-hysteresis applications.

- Long range detection of small objects with small difference in light intensity **H-02 mode**

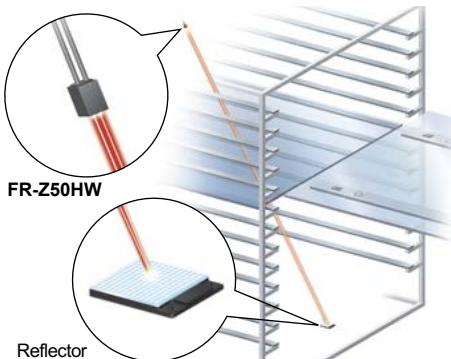

- Highly accurate detection while avoiding saturation **H-01 mode**

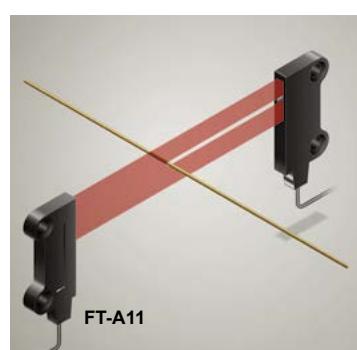

FIBER SENSORS
LASER SENSORS
PHOTOELECTRIC SENSORS
MICRO PHOTOELECTRIC SENSORS
AREA SENSORS
SAFETY LIGHT CURTAINS / SAFETY COMPONENTS
PRESSURE / FLOW SENSORS
INDUCTIVE PROXIMITY SENSORS
PARTICULAR USE SENSORS
SENSOR OPTIONS
SIMPLE WIRE-SAVING UNITS
WIRE-SAVING SYSTEMS
MEASUREMENT SENSORS
STATIC CONTROL DEVICES
LASER MARKERS
PLC
HUMAN MACHINE INTERFACES
ENERGY MANAGEMENT SOLUTIONS
FA COMPONENTS
MACHINE VISION SYSTEMS
UV CURING SYSTEMS
Selection Guide
Fibers
Fiber Amplifiers
Other Products

**FX-500**

**FX-550**

**FX-100**

**FX-410**

## FIBER SENSORS

## LASER SENSORS

## PHOTOELECTRIC SENSORS

## MICRO PHOTOELECTRIC SENSORS

## AREA SENSORS

## SAFETY LIGHT CURTAINS / SAFETY COMPONENTS

## PRESSURE / FLOW SENSORS

## INDUCTIVE PROXIMITY SENSORS

## PARTICULAR USE SENSORS

## SENSOR OPTIONS

## SIMPLE WIRE-SAVING UNITS

## WIRE-SAVING SYSTEMS

## MEASUREMENT SENSORS

## STATIC CONTROL DEVICES

## LASER MARKERS

## PLC

## HUMAN MACHINE INTERFACES

## ENERGY MANAGEMENT SOLUTIONS


## FA COMPONENTS

## MACHINE VISION SYSTEMS


## UV CURING SYSTEMS

## Flat display with wide viewing angle

The large and high-contrast 7-segment display of high luminance provides clear visibility from a wide angle of view.

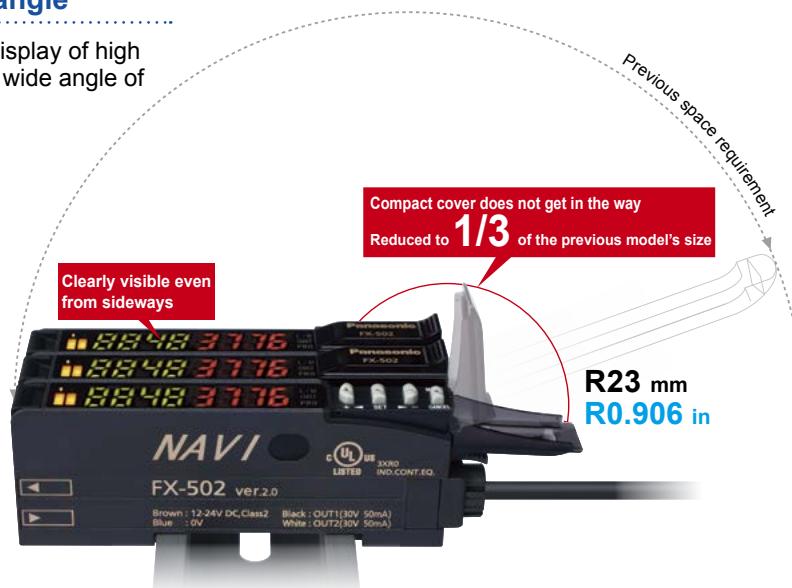Resolves variation in displayed incident light intensity  
Display adjustment setting

The variation in display can be adjusted to random values. This helps to define proper instruction in a work order.

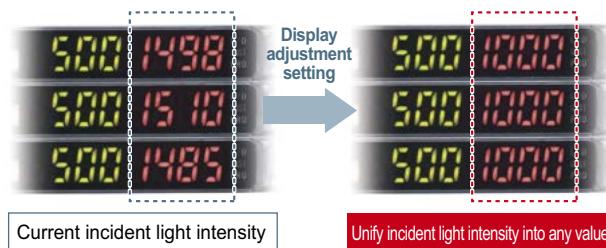

Current incident light intensity

Unify incident light intensity into any value

Stable detection over long and short periods  
Stabilized emission amount

The "four-chemical emitting element", which we are the first to incorporate to maintain a stable level of light emission, has now become an industry standard. FX-500 series continues to adopt the same emitting element as well as the "APC (Auto Power Control) circuit" which improves stability in short periods such as when the power is turned on.

Saves maintenance time  
Threshold tracking function

This function performs automatic setting to threshold value by checking the incident light intensity at desired intervals in order to follow the changes in the light amount resulting from changes in the environment over long periods (such as dust). This contributes to reduction in maintenance hours.

Suitable for preventative maintenance  
Self-diagnosis outputFX-502(P)  
FX-505(P)-C2

FX-502(P) / 505(P)-C2 can set Output 2 as a self-diagnosis output. When the teaching of Output 1's threshold value is carried out, Output 2 is set concurrently with the setting randomly shifted by the amount of surplus of threshold value. Light intensity deterioration due to fiber breakage or dust accumulation can be notified as an alarm output.

- Detect deterioration in light intensity (e.g. Useful in dusty environment)




Self-diagnosis can be used with the threshold tracking function for added effectiveness.


Stable detection while being eco-friendly  
Emission power & gain setting

In cases when the incident light intensity is saturated, the light emitting amount can be adjusted to the optimal level by AUTO without changing the response time. This allows stable detection with an optimal S/N ratio and saves energy by controlling the emitting electric current.

- Detecting a transparent sheet

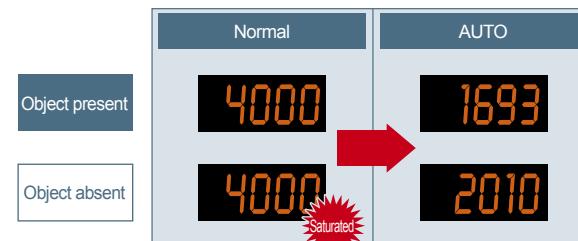

Auto mode (AUTO) and 3-level manual mode (H / M / L [fine-adjustable]) are incorporated.

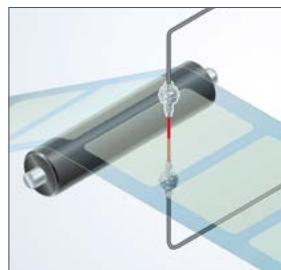


ECO

## Built-in logic functions


### No PLC necessary, saving material and programming costs

#### ■ Logical calculation functions


3 logical calculations (AND, OR, XOR) are available with fiber sensor only. 3 logical operations can be selected against Output 1. Additional controller is not required so both wire-saving and cost reduction can be achieved.

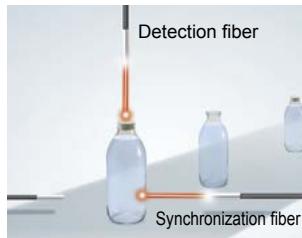


##### Calculation of two neighboring amplifiers

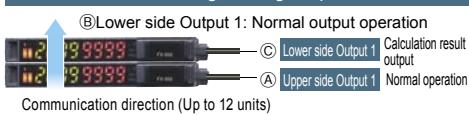

##### Calculation of two outputs in one amplifier FX-502(P) / 505(P)-C2

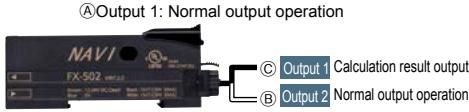

##### Calculation of one amplifier and external input FX-502(P) / 505(P)-C2

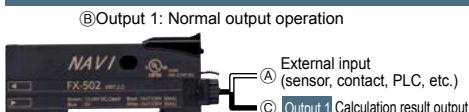


#### Truth table

A	B	Logical calculation output (C)		
		AND	OR	XOR
ON	ON	ON	ON	OFF
OFF	ON	OFF	ON	ON
ON	OFF	OFF	ON	ON
OFF	OFF	OFF	OFF	OFF

#### ■ Equipped with 5 timer types

A wide variety of timer control operations can be carried out by fiber sensors only.


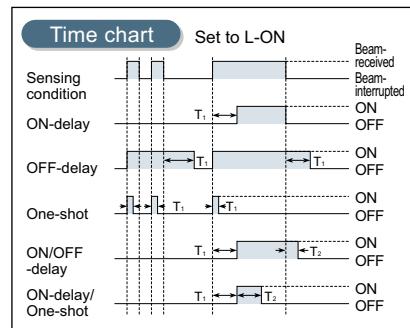


Timer period: 0.05 ms to 32 s  
Output 1 has ON / OFF-delay and ON-delay / One-shot timers are available.

#### Analog output cable type

#### FX-505(P)-C2

To monitor the sensing of objects, a 4 to 20 mA analog current is output in respond to the digital value of the incident light intensity.

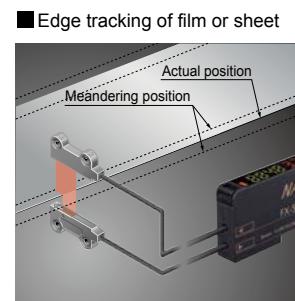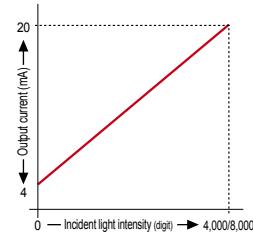

The meandering path can be monitored as the light intensity changes.

#### Smooth setup changes by 8 data banks

The number of data banks used for saving the setup conditions of the amplifier is increased to eight. Setup conditions can be saved and loaded to make setup changes easy at a worksite where multiple models are manufactured.

#### Remote control improves work efficiency by external input

#### FX-502(P) FX-505(P)-C2

Work efficiency can be improved by operating via PLC output or other external signal.\*

\* FX-502(P) can operate via external signal when switching from Output 2 to external input.

#### ■ Functions operable by external input

Full-auto* / Limit* / 2-point teaching*	Display adjustment setting*
Data bank load* / save*	Logical calculation (self-unit only)
Emission halt	Copying function lock (self-unit only)

\* FX-505(P)-C2 can obtain answer back output after external input, when sensing output 2 is set to answer back output mode.

FIBER SENSORS

LASER SENSORS

PHOTOELECTRIC SENSORS

MICRO PHOTOELECTRIC SENSORS

AREA SENSORS

SAFETY LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC CONTROL DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY MANAGEMENT SOLUTIONS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Fibers

Fiber Amplifiers

Other Products

FX-500

FX-550


FX-100

FX-410

FIBER SENSORS
LASER SENSORS
PHOTO-ELECTRIC SENSORS
MICRO PHOTO-ELECTRIC SENSORS
AREA SENSORS
SAFETY LIGHT CURTAINS / SAFETY COMPONENTS
PRESSURE / FLOW SENSORS
INDUCTIVE PROXIMITY SENSORS
PARTICULAR USE SENSORS
SENSOR OPTIONS
SIMPLE WIRE-SAVING UNITS
WIRE-SAVING SYSTEMS
MEASUREMENT SENSORS
STATIC CONTROL DEVICES
LASER MARKERS

## An optical communication function allows sensors to be adjusted simultaneously

The data that is currently set can be copied and saved all at once for all amplifiers connected together from the right side thanks to the optical communication function. This greatly reduces troublesome setup tasks and makes setup much smoother.

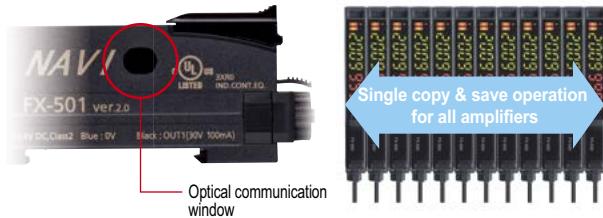

## ORDER GUIDE

### Amplifiers

Quick-connection cable is not supplied with FX-501(P) and FX-502(P). Please order it separately.

Type	Appearance	Model No.	Emitting element	Output	External input	
Standard type		FX-501	Red LED	NPN open-collector transistor		
		FX-501P		PNP open-collector transistor		
2-output type		FX-502		NPN open-collector transistor 2 outputs	Incorporated (Switchable with Output 2)	
		FX-502P		PNP open-collector transistor 2 outputs		
Cable type		FX-505-C2		NPN open-collector transistor 2 outputs analog output	Incorporated	
		FX-505P-C2		PNP open-collector transistor 2 outputs analog output		

Selection Guide
Fibers
Fiber Amplifiers
Other Products

FX-500


FX-550

FX-100

FX-410

## No need to specify a main unit or sub unit

All FX-500 amplifiers can be used as either a main unit or a sub unit. Just use a main cable or a sub cable to distinguish the two. This reduces the costs of inventory management.

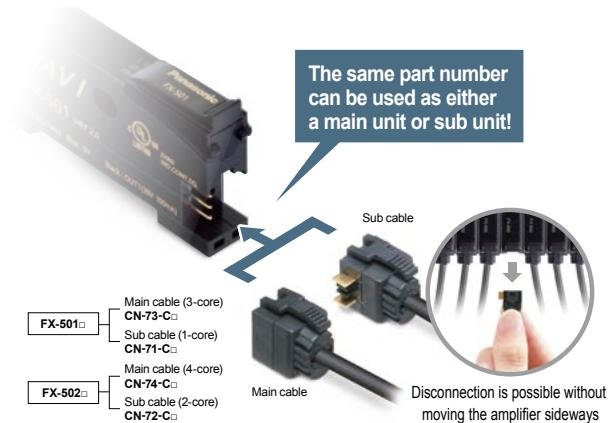

Disconnection is possible without moving the amplifier sideways

## ■ ORDER GUIDE


### Quick-connection cables

For FX-501(P) Quick-connection cable is not supplied with the amplifier. Please order it separately.

Type	Model No.	Description
Main cable (3-core)	<b>CN-73-C1</b>	Length: 1 m 3.281 ft 0.2 mm <sup>2</sup> 3-core cabtyre cable, with connector on one end
	<b>CN-73-C2</b>	Length: 2 m 6.562 ft Cable outer diameter: ø3.3 mm ø0.130 in
	<b>CN-73-C5</b>	Length: 5 m 16.404 ft
Sub cable (1-core)	<b>CN-71-C1</b>	Length: 1 m 3.281 ft 0.2 mm <sup>2</sup> 1-core cabtyre cable, with connector on one end
	<b>CN-71-C2</b>	Length: 2 m 6.562 ft Cable outer diameter: ø3.3 mm ø0.130 in
	<b>CN-71-C5</b>	Length: 5 m 16.404 ft Connectable to a main cable up to 15 cables.


#### Main cable

- CN-73-C□

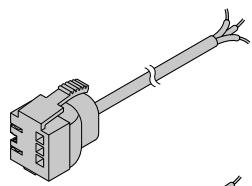

#### Sub cable

- CN-71-C□

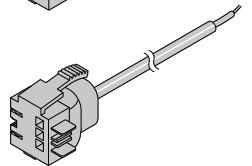


For FX-502(P) Quick-connection cable is not supplied with the amplifier. Please order it separately.

Type	Model No.	Description
Main cable (4-core)	<b>CN-74-C1</b>	Length: 1 m 3.281 ft 0.2 mm <sup>2</sup> 4-core cabtyre cable, with connector on one end
	<b>CN-74-C2</b>	Length: 2 m 6.562 ft Cable outer diameter: ø3.3 mm ø0.130 in
	<b>CN-74-C5</b>	Length: 5 m 16.404 ft
Sub cable (2-core)	<b>CN-72-C1</b>	Length: 1 m 3.281 ft 0.2 mm <sup>2</sup> 2-core cabtyre cable, with connector on one end
	<b>CN-72-C2</b>	Length: 2 m 6.562 ft Cable outer diameter: ø3.3 mm ø0.130 in
	<b>CN-72-C5</b>	Length: 5 m 16.404 ft Connectable to a main cable up to 15 cables.


#### Main cable

- CN-74-C□

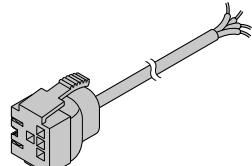

#### Sub cable

- CN-72-C□

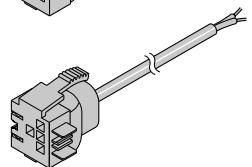

**End plates** End plates are not supplied with the amplifier. Please order them separately when the amplifiers are mounted in cascade.


Appearance	Model No.	Description
	<b>MS-DIN-E</b>	When amplifiers are mounted in cascade, or when an amplifier moves depending on the way it is installed on a DIN rail, these end plates clamp amplifiers into place on both sides. Make sure to use end plates when cascading multiple amplifiers together. 2 pcs. per set

## ■ OPTIONS

Designation	Model No.	Description
Amplifier mounting bracket	<b>MS-DIN-2</b>	Mounting bracket for amplifier


### Amplifier mounting bracket

- MS-DIN-2



### Accessory

- **FX-MB1** (Amplifier protection seal)  
10 sets of 2 communication window seals and 1 connector seal

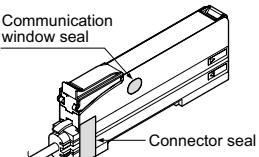

## ■ LIST OF FIBERS

Refer to "Fiber Selection p.5 ~" for details of each fiber.

FIBER SENSORS
LASER SENSORS
PHOTO-ELECTRIC SENSORS
MICRO PHOTO-ELECTRIC SENSORS
AREA SENSORS
SAFETY LIGHT CURTAINS / SAFETY COMPONENTS
PRESSURE / FLOW SENSORS
INDUCTIVE PROXIMITY SENSORS
PARTICULAR USE SENSORS
SENSOR OPTIONS
SIMPLE WIRE-SAVING UNITS
WIRE-SAVING SYSTEMS
MEASUREMENT SENSORS
STATIC CONTROL DEVICES
LASER MARKERS
PLC
HUMAN MACHINE INTERFACES
ENERGY MANAGEMENT SOLUTIONS
FA COMPONENTS
MACHINE VISION SYSTEMS
UV CURING SYSTEMS

Selection Guide
Fibers
Fiber Amplifiers
Other Products

FX-500
FX-550
FX-100
FX-410

## SPECIFICATIONS

	Type	Standard type	2-output type	Cable type (Analog output type)		
Model No.	NPN output	<b>FX-501</b>	<b>FX-502</b>	<b>FX-505-C2</b>		
Item	PNP output	<b>FX-501P</b>	<b>FX-502P</b>	<b>FX-505P-C2</b>		
CE marking directive compliance	EMC Directive, RoHS Directive					
Supply voltage	12 to 24 V DC <sup>+10%</sup> <sub>-15%</sub> Ripple P-P 10 % or less					
Power consumption	Normal operation: 960 mW or less (current consumption 40 mA or less at 24 V supply voltage, excluding analog output of cable type) ECO mode: 680 mW or less (current consumption 28 mA or less at 24 V supply voltage, excluding analog output of cable type)					
Output (2-output type and cable type: Output 1, Output 2)	<NPN output type> NPN open-collector transistor <ul style="list-style-type: none"> <li>• Maximum sink current: 100 mA</li> <li>(2-output type and cable type are 50 mA) (Note 2)</li> <li>• Applied voltage: 30 V DC or less (between output and 0 V)</li> <li>• Residual voltage: 2 V or less (Note 3) (at maximum sink current)</li> </ul> <PNP output type> PNP open-collector transistor <ul style="list-style-type: none"> <li>• Maximum source current: 100 mA</li> <li>(2-output type and cable type are 50 mA) (Note 2)</li> <li>• Applied voltage: 30 V DC or less (between output and +V)</li> <li>• Residual voltage: 2 V or less (Note 3) (at maximum source current)</li> </ul>					
Output points	1 point		2 points			
Output operation	Switchable either Light-ON or Dark-ON by L/D mode					
Short-circuit protection	Incorporated					
Response time	H-SP: 25 µs or less, FAST: 60 µs or less, STD: 250 µs or less, LONG: 2 ms or less, U-LG: 4 ms or less, HYPR: 24 ms or less, selectable					
Analog output (Cable type only)	Output current: 4 to 20 mA approx. [H-SP, FAST, STD: At 0 to 4,000 digits, LONG: At 0 to 8,000 digits (Note 4)], Response time: 2 ms or less, Zero point: Within 4 mA ±1 % F.S., Span: Within 16 mA ±5 % F.S., Linearity: Within ±3 % F.S., Load resistance: 0 to 250 Ω					
External input (2-output type only, switchable with Output 2)			<NPN output type> NPN non-contact input <ul style="list-style-type: none"> <li>• Signal condition High: +8 V to +V DC or Open</li> <li>Low: 0 to +1.2 V DC (at 0.5 mA source current)</li> <li>• Input impedance: 10 kΩ approx.</li> </ul> <PNP output type> PNP non-contact input <ul style="list-style-type: none"> <li>• Signal condition High: +4 V to +V DC (at 3 mA sink current)</li> <li>Low: 0 to +0.6 V DC or Open</li> <li>• Input impedance: 10 kΩ approx.</li> </ul>			
Possible external input function			Emission halt / Teaching (Full-auto, Limit, 2-point) / Logic operation setting / Copy lock / Display adjustment / Data bank load / Data bank save, selectable			
Sensitivity setting	2-point teaching / Limit teaching / Full-auto teaching / Manual adjustment					
Incident light intensity display range	H-SP / FAST / STD: 0 to 4,000, LONG: 0 to 8,000, U-LG / HYPR: 0 to 9,999					
Timer function	Incorporated with variable OFF-delay / ON-delay / One-shot / ON OFF-delay / ON-delay • One-shot timer, switchable either effective or ineffective		<Output 1> Incorporated with variable OFF-delay / ON-delay / One-shot / ON OFF-delay / ON-delay • One-shot timer, switchable either effective or ineffective	<Output 2> Incorporated with variable OFF-delay / ON-delay / One-shot timer, switchable either effective or ineffective		
Timer period	Timer range "ms": 0.5 ms approx., 1 to 9,999 ms approx., 1 ms approx., Timer range "sec.": 0.5 s approx., 1 to 32 s approx., 1 s approx., Timer range "1/10 ms": 0.05 ms approx., 0.1 to 999.9 ms approx., 0.1 ms approx., each output is set individually					
Light emitting amount selection function	Incorporated, 3 levels (each level 25 to 100 %) + Auto setting [1 level (25 to 100 %) when using H-SP mode]					
Interference prevention function	Incorporated (Note 5), selectable either automatic interference prevention or different frequency					
Various settings	Hysteresis setting / Shift amount setting / Emission power setting / Display turning setting / ECO setting / Data bank loading saving setting / Copying setting / Code setting / Reset setting / Logical calculation setting / Threshold value tracking setting, etc.					
Protection	IP40 (IEC)					
Ambient temperature	-10 to +55 °C <b>+14 to +131 °F</b> [If 4 to 7 units are mounted in cascade: -10 to +50 °C <b>+14 to +122 °F</b> or if 8 to 16 units (cable type: 8 to 12 units) are mounted in cascade: -10 to +45 °C <b>+14 to +113 °F</b> ] (No dew condensation or icing allowed), Storage: -20 to +70 °C <b>-4 to +158 °F</b>					
Emitting element (modulated)	Red LED (Peak emission wavelength: 643 nm <b>0.025 mil</b> )					
Material	Enclosure, Case cover: Polycarbonate, Switch: Polyacetal					
Cable			0.2 mm <sup>2</sup> 6-core cabtyre cable, 2 m <b>6.562 ft</b> long			
Cable extension			Extension up to total 100 m <b>328.084 ft</b> is possible with 0.3 mm <sup>2</sup> , or more, cable. (however, supply voltage 12 V DC or more)			
Weight	Net weight: 15 g approx., Gross weight: 70 g approx.			Net weight: 60 g approx., Gross weight: 100 g approx.		
Accessory	<b>FX-MB1</b> (Amplifier protection seal): 1 set					

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23 °C **+73.4 °F**.

2) 50 mA max. if 5 or more standard types are connected together. (25 mA in case of 2-output type and cable type)

3) In case of using the quick-connection cable (cable length 5 m **16.404 ft**) (optional).

4) If display adjustment was conducted, it is not in this range.

5) Number of sensor heads which is possible to be mounted closely in auto interference prevention function depends on response time as shown in table below.  
Number of sensor heads which is possible to be mounted closely in different frequency Interference prevention function is up to 3 units.


- Number of sensor heads mountable closely (Unit: set)

Response time	H-SP	FAST	STD	LONG	U-LG	HYPR
IP-1	0	2	4	8	8	12

## I/O CIRCUIT AND WIRING DIAGRAMS

### FX-501


#### I/O circuit diagram

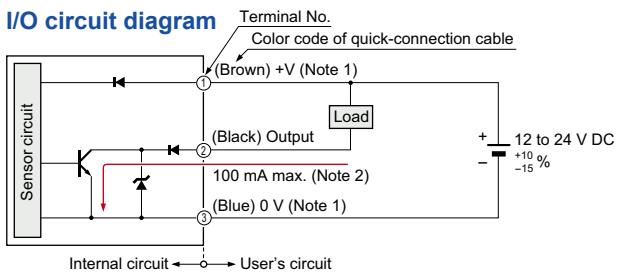

Notes: 1) The quick-connection sub cable does not have +V (brown) and 0 V (blue). The power is supplied from the connector of the main cable.  
2) 50 mA max., if five amplifiers or more, are connected together.

### FX-501P


#### I/O circuit diagram

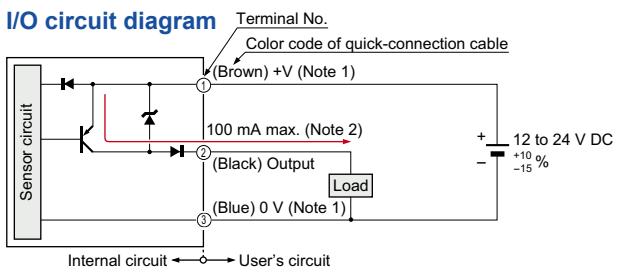

Notes: 1) The quick-connection sub cable does not have +V (brown) and 0 V (blue). The power is supplied from the connector of the main cable.  
2) 50 mA max., if five amplifiers or more, are connected together.

### FX-502


#### I/O circuit diagram

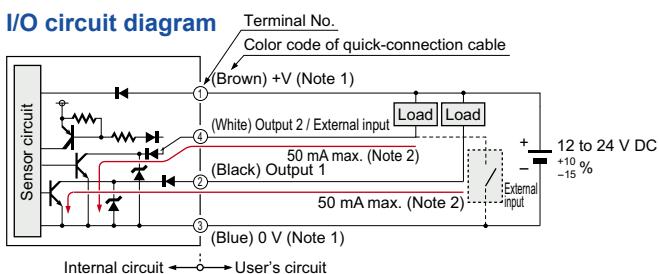

Notes: 1) The quick-connection sub cable does not have +V (brown) and 0 V (blue). The power is supplied from the connector of the main cable.  
2) 25 mA max., if five amplifiers or more, are connected together.

### FX-502P


#### I/O circuit diagram

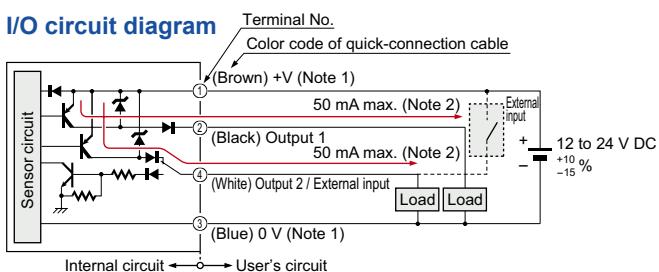

Notes: 1) The quick-connection sub cable does not have +V (brown) and 0 V (blue). The power is supplied from the connector of the main cable.  
2) 25 mA max., if five amplifiers or more, are connected together.


#### NPN output type

#### Wiring diagram

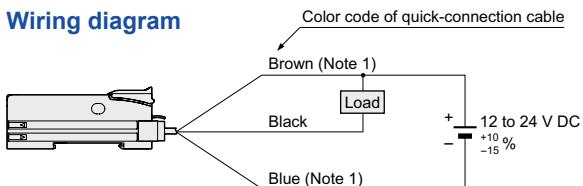


Note: The quick-connection sub cable does not have a brown and a blue lead wire.

#### Terminal arrangement diagram




#### PNP output type

#### Wiring diagram

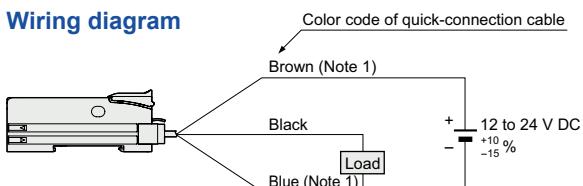


Note: The quick-connection sub cable does not have a brown and a blue lead wire.

#### Terminal arrangement diagram




#### NPN output type

#### Wiring diagram

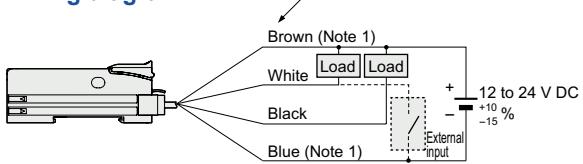


Note: The quick-connection sub cable does not have a brown and a blue lead wire.

#### Terminal arrangement diagram

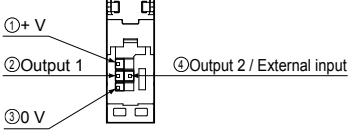


#### PNP output type

#### Wiring diagram

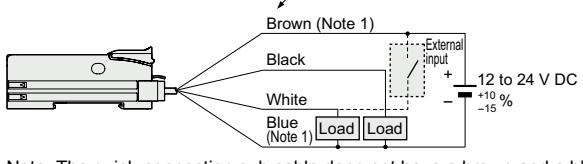

Note: The quick-connection sub cable does not have a brown and a blue lead wire.

#### Terminal arrangement diagram

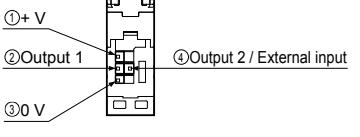


## I/O CIRCUIT AND WIRING DIAGRAMS


### FX-505-C2

NPN output type

#### I/O circuit diagram

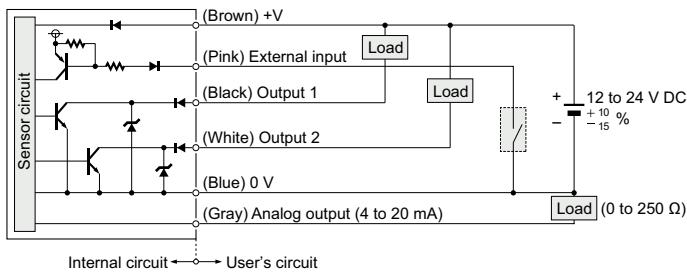


#### Wiring diagram

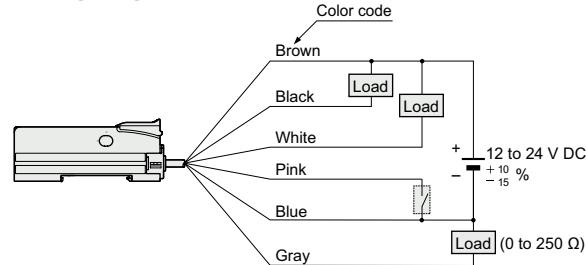


### FX-505P-C2

PNP output type

#### I/O circuit diagram

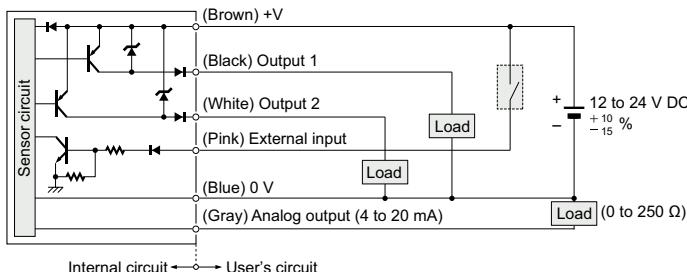


#### Wiring diagram

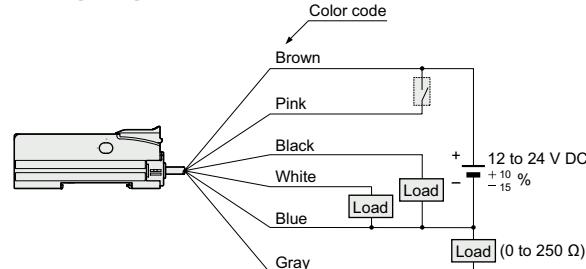

## SENSING CHARACTERISTICS (TYPICAL)

### Thru-beam type Parallel deviation

Sensing characteristics are listed in the alphabetic order of Model No.

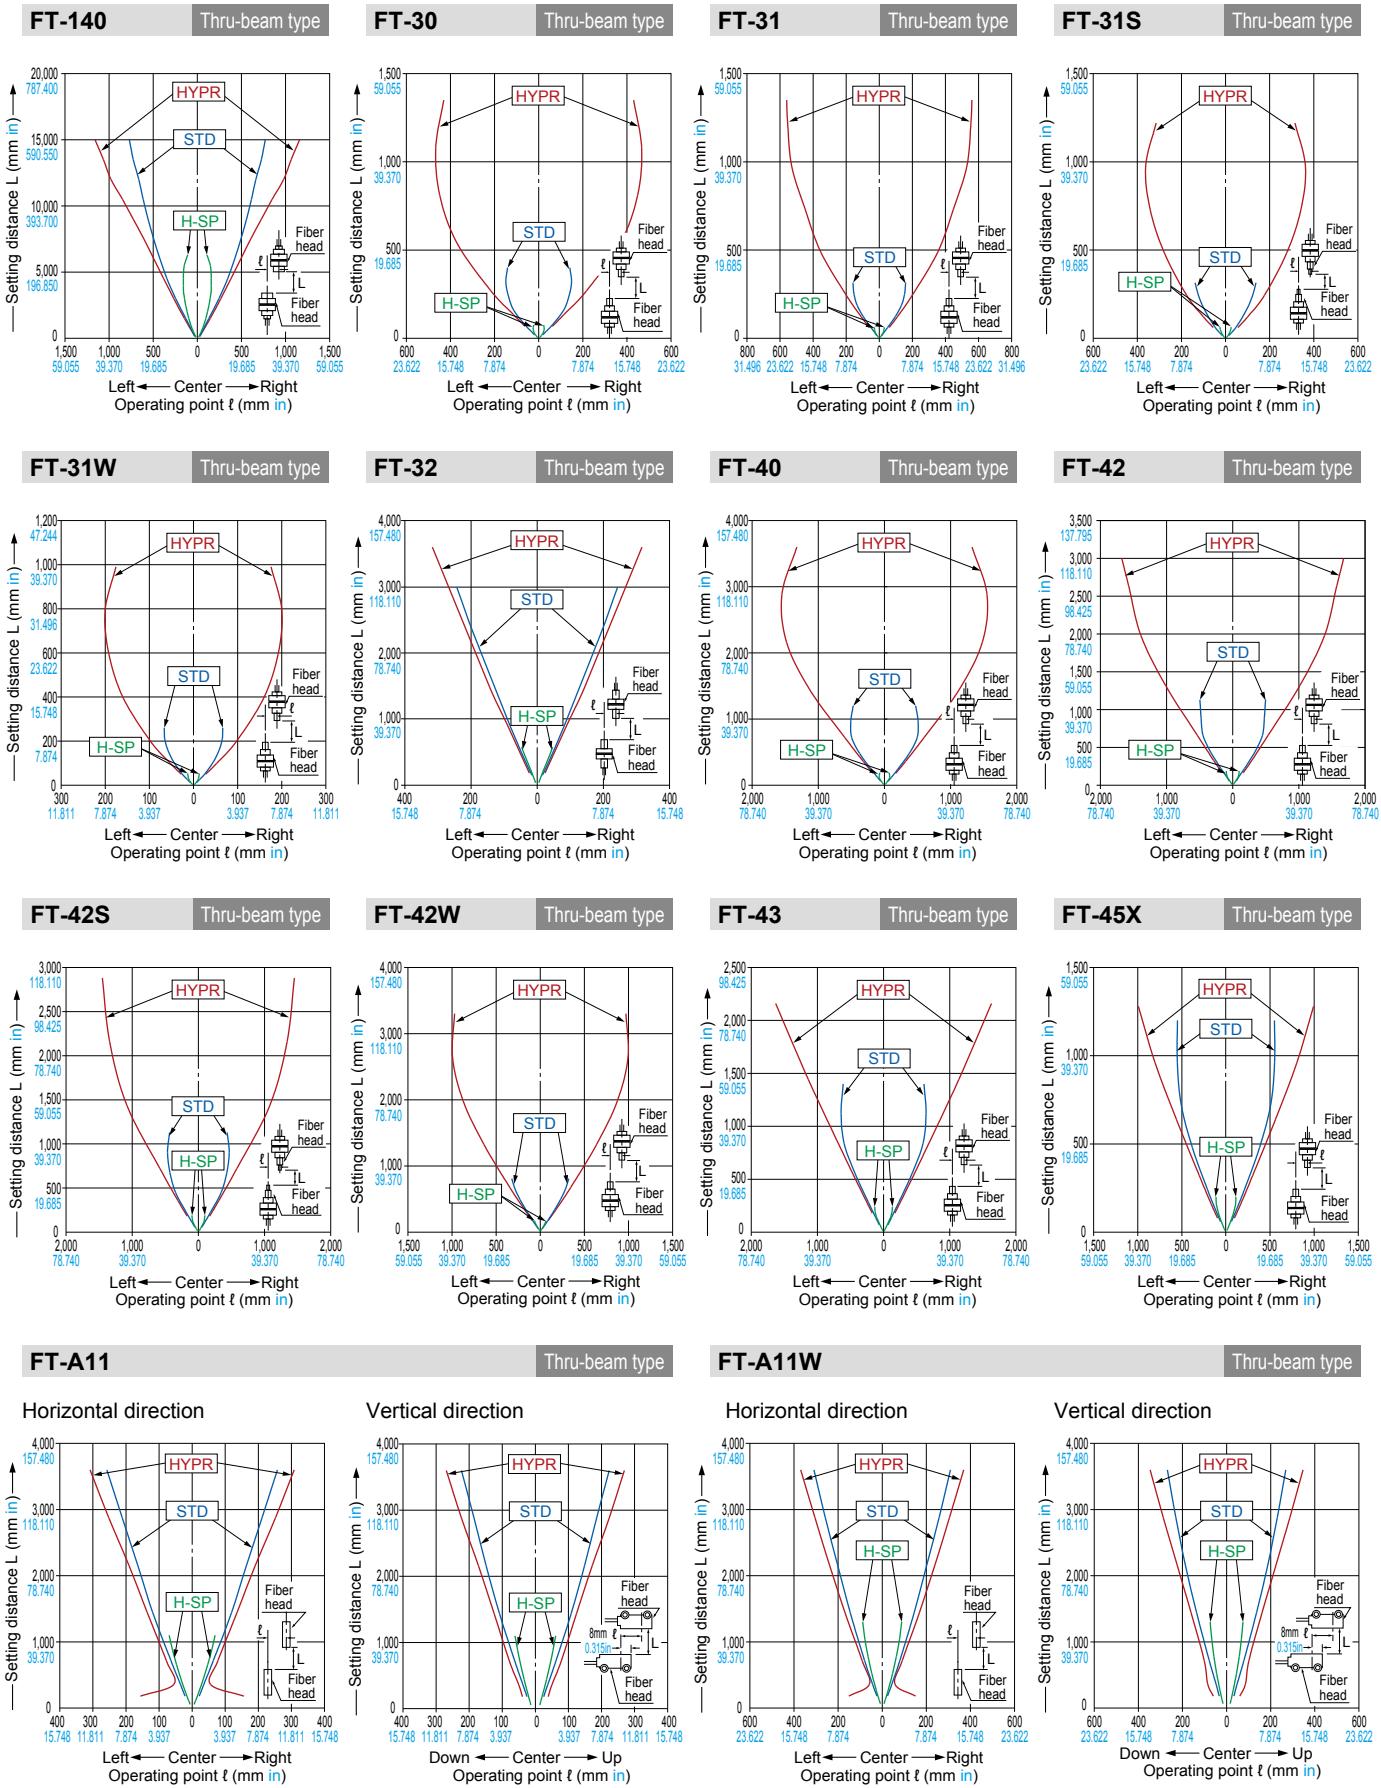

FIBER SENSORS
LASER SENSORS
PHOTO-ELECTRIC SENSORS
MICRO PHOTO-ELECTRIC SENSORS
AREA SENSORS
SAFETY LIGHT CURTAINS / SAFETY COMPONENTS
PRESSURE / FLOW SENSORS
INDUCTIVE PROXIMITY SENSORS
PARTICULAR USE SENSORS
SENSOR OPTIONS
SIMPLE WIRE-SAVING UNITS
WIRE-SAVING SYSTEMS
MEASUREMENT SENSORS
STATIC CONTROL DEVICES
LASER MARKERS
PLC
HUMAN MACHINE INTERFACES
ENERGY MANAGEMENT SOLUTIONS
FA COMPONENTS
MACHINE VISION SYSTEMS
UV CURING SYSTEMS
Selection Guide
Fibers
Fiber Amplifiers
Other Products

FX-500

FX-100

FX-410


## SENSING CHARACTERISTICS (TYPICAL)

### Thru-beam type Parallel deviation

Sensing characteristics are listed in the alphabetic order of Model No. (Models with same sensing characteristics are grouped together.)


FT-A32

#### Horizontal direction

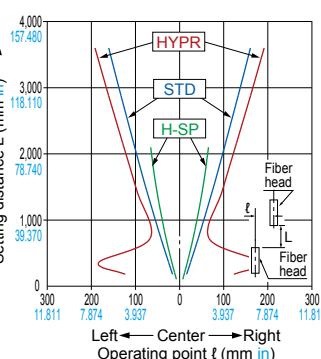


Thru-beam type

#### Vertical direction

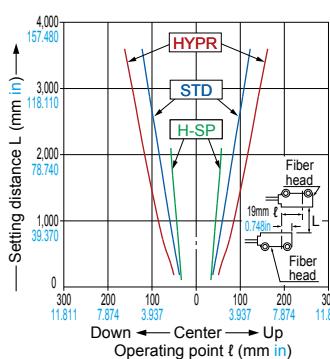


FT-A32W

#### Horizontal direction

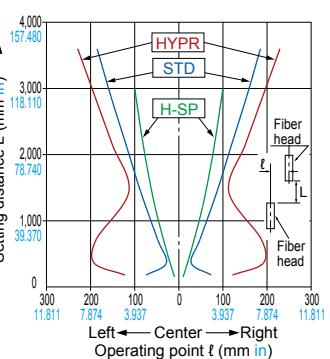


Thru-beam type

#### Vertical direction

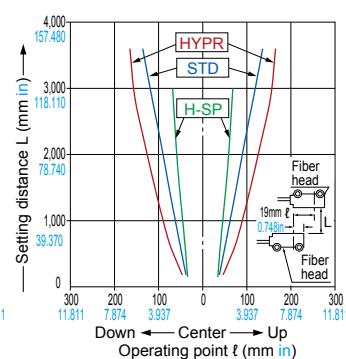


FT-AL05

#### Horizontal direction

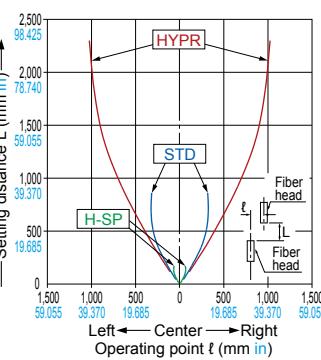


Thru-beam type

#### Vertical direction

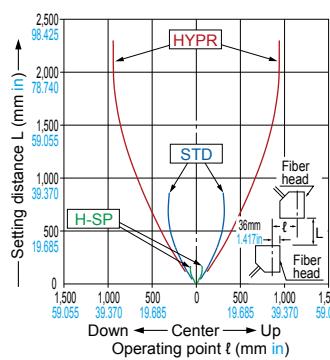


FT-E13

Thru-beam type

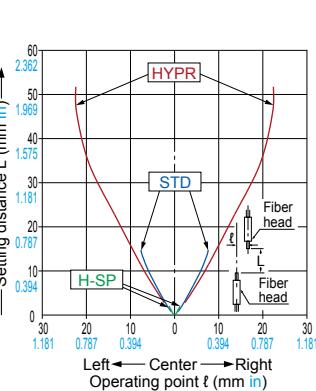


Thru-beam type

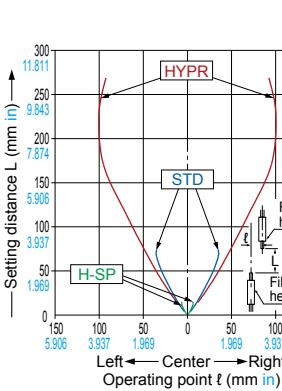

FT-H13-FM2


Thru-beam type

#### Horizontal direction

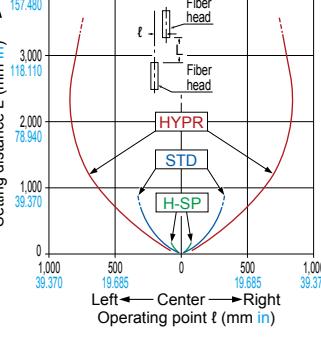


Thru-beam type

#### Vertical direction

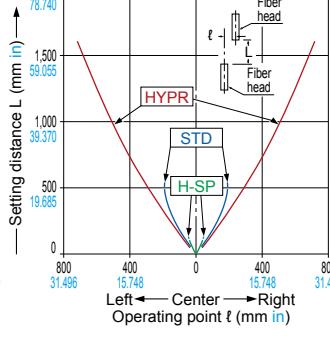

FT-H20-M1

Thru-beam type

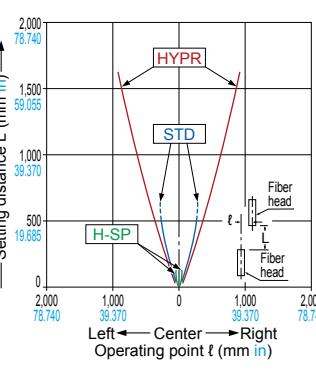


FT-H20-VJ50-S


FT-H20-VJ80-S

Thru-beam type

#### Horizontal direction


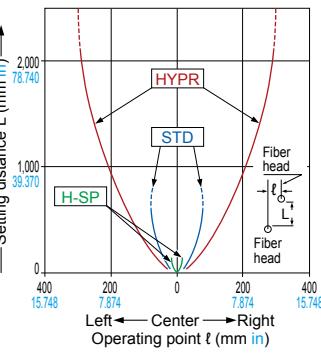


#### Vertical direction

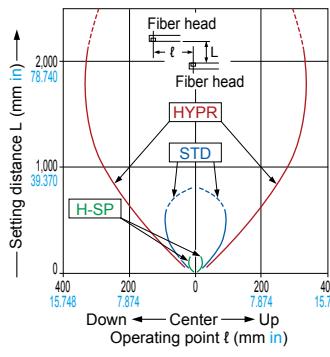

FT-H20W-M1


Thru-beam type

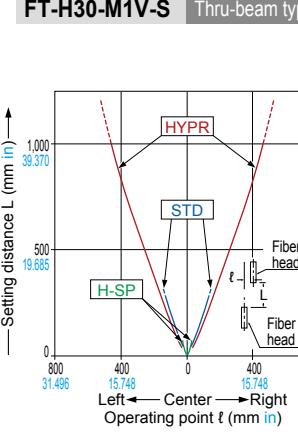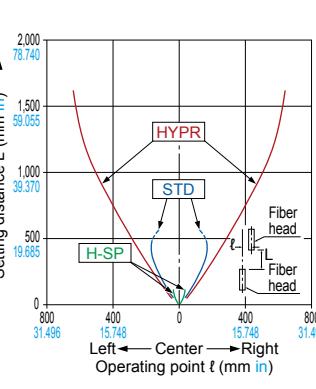

## SENSING CHARACTERISTICS (TYPICAL)


### Thru-beam type Parallel deviation

**FT-H35-M2**    **FT-H35-M2S6**    Thru-beam type

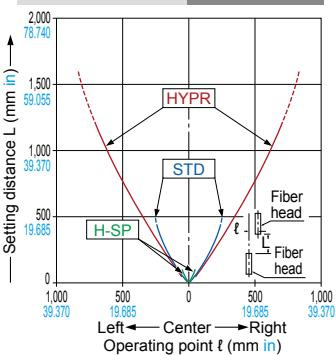


Sensing characteristics are listed in the alphabetic order of Model No. (Models with same sensing characteristics are grouped together.)

**FT-HL80Y**    Thru-beam type

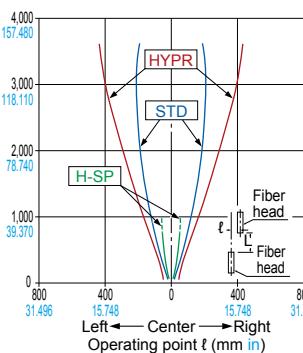


**FT-KS40**    Thru-beam type

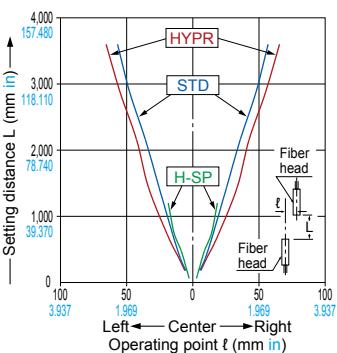


**FT-KV26**

### Horizontal direction

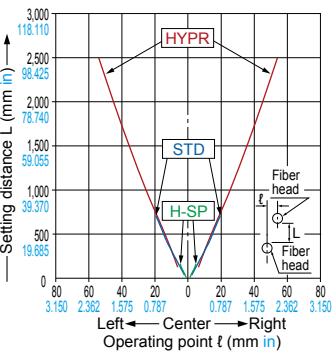


Thru-beam type

### Vertical direction

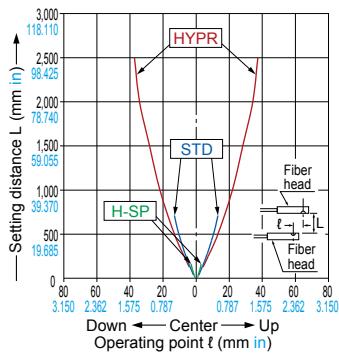


**FT-KV26H1**

### Horizontal direction

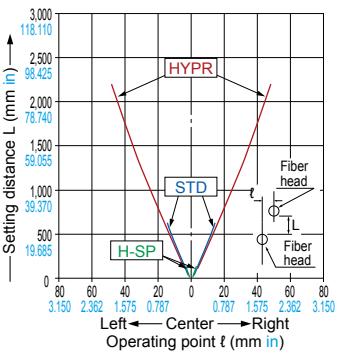


Thru-beam type

### Vertical direction

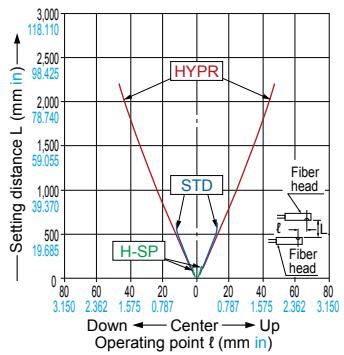


**FT-KV40**

### Horizontal direction

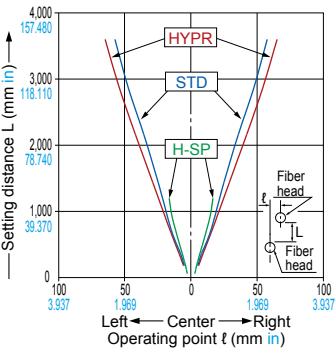


Thru-beam type

### Vertical direction

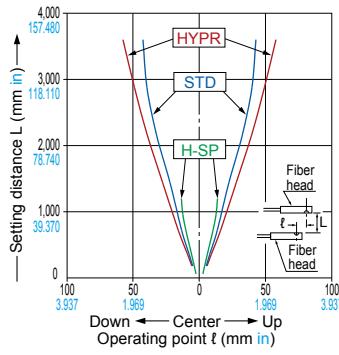


**FT-KV40W**

### Horizontal direction

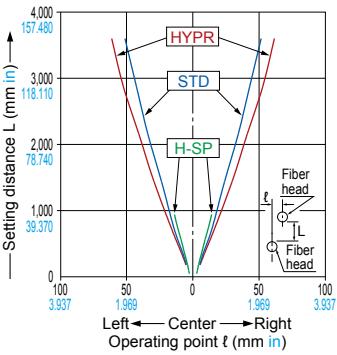


Thru-beam type

### Vertical direction

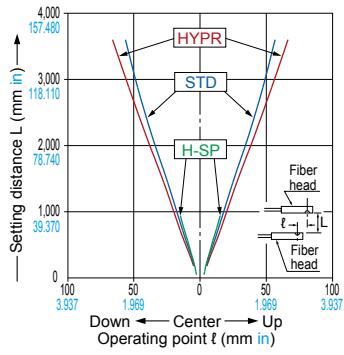


**FT-L80Y**

Thru-beam type

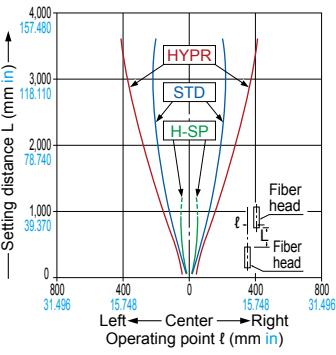


**FT-R31**

Thru-beam type

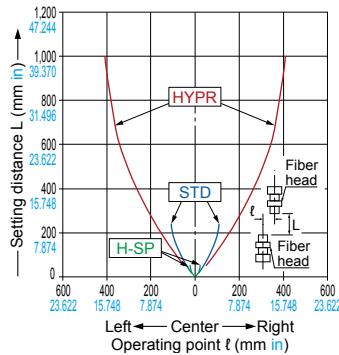

**FT-R40**

Thru-beam type

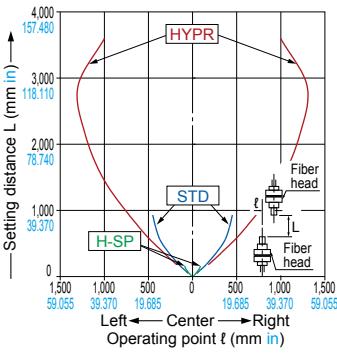


## SENSING CHARACTERISTICS (TYPICAL)

### Thru-beam type Parallel deviation

Sensing characteristics are listed in the alphabetic order of Model No.


**FT-R41W**

Horizontal direction

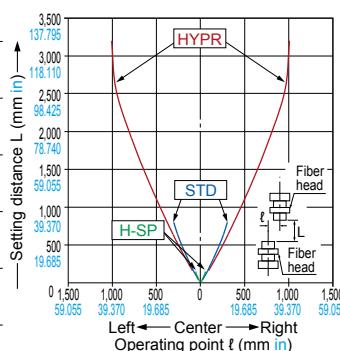


Thru-beam type

Vertical direction

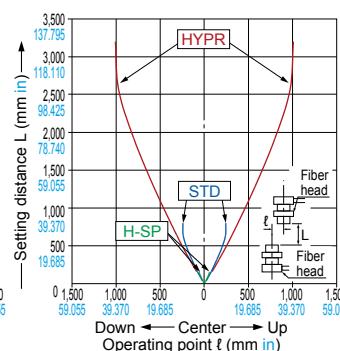


**FT-R42W**

Horizontal direction

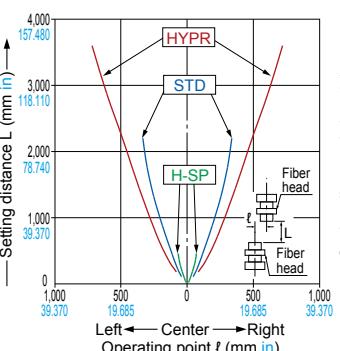

Thru-beam type

Vertical direction


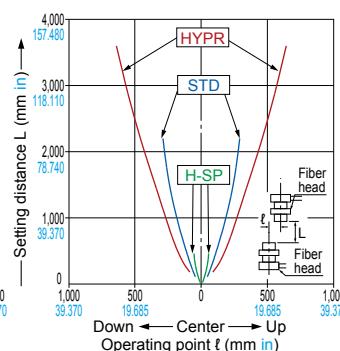


**FT-R43**

Thru-beam type

**FT-R44Y**

Thru-beam type

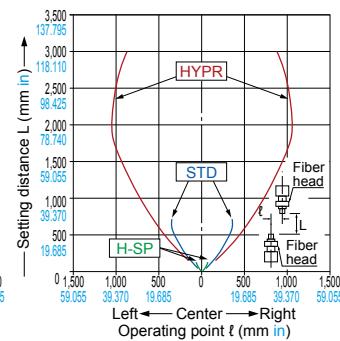
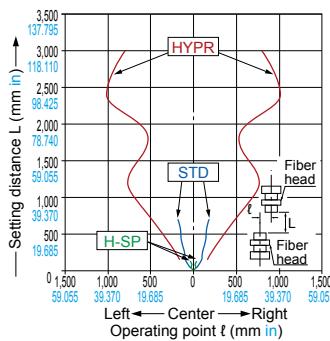


**FT-R60Y**

Thru-beam type

**FT-S11**

Thru-beam type

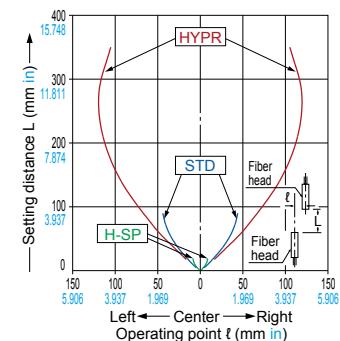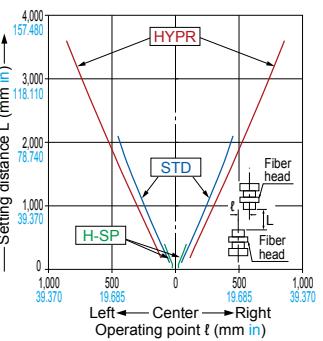

**FT-S20**

Thru-beam type

**FT-S21**





Thru-beam type

**FT-S21W**

Thru-beam type

**FT-S22**

Thru-beam type

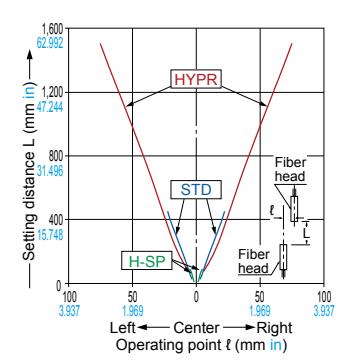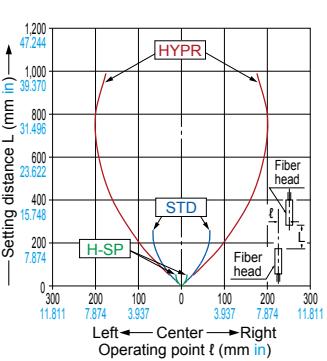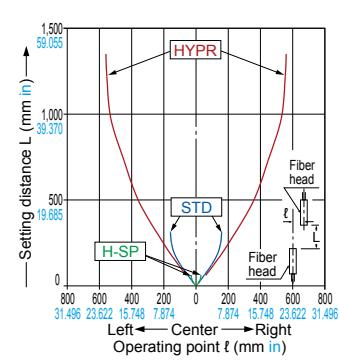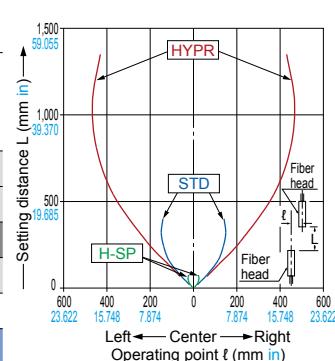

**FT-S30**




Thru-beam type

**FT-S31W**

Thru-beam type

**FT-S32**

Thru-beam type

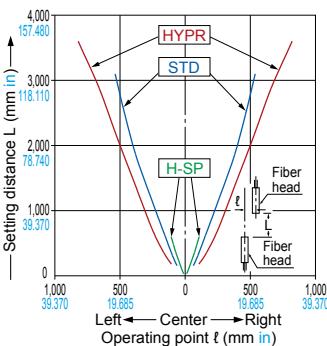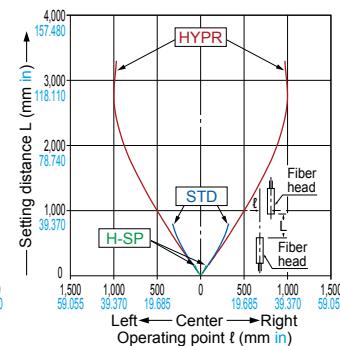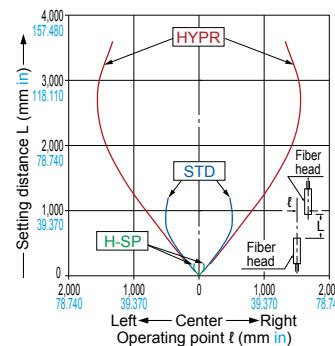


## SENSING CHARACTERISTICS (TYPICAL)

### Thru-beam type Parallel deviation

Sensing characteristics are listed in the alphabetic order of Model No.

**FT-V23**


#### Horizontal direction

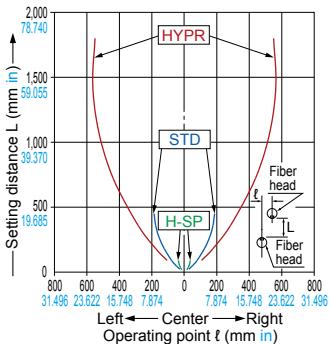


Thru-beam type

**FT-V24W**

#### Horizontal direction

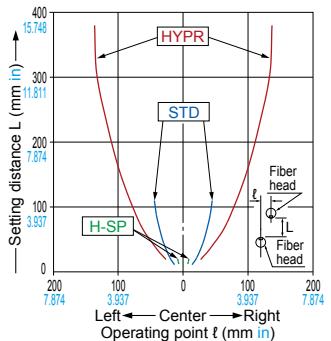


#### Vertical direction

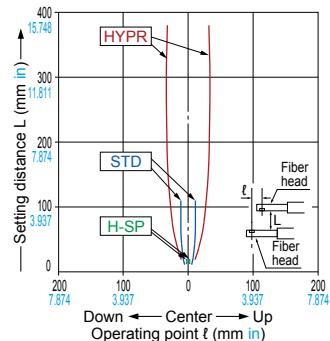

**FT-V25**


#### Horizontal direction

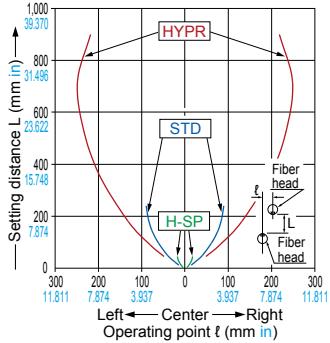


Thru-beam type

**FT-V30**

#### Horizontal direction

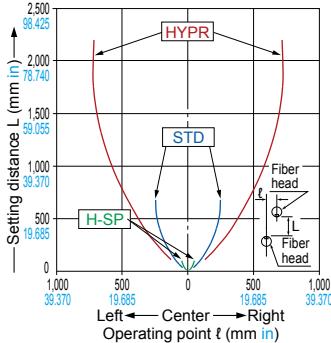


#### Vertical direction

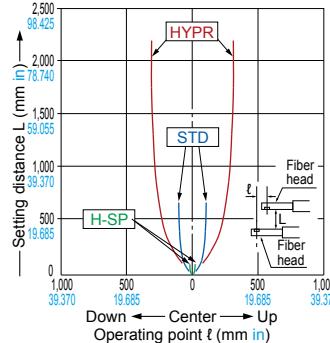

**FT-V40**


#### Horizontal direction

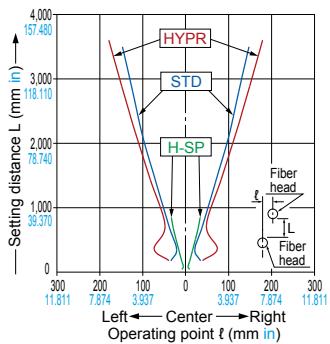


Thru-beam type

**FT-V80Y**

#### Horizontal direction

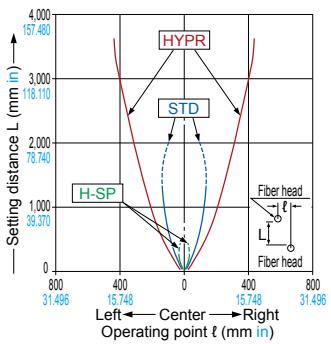


#### Vertical direction

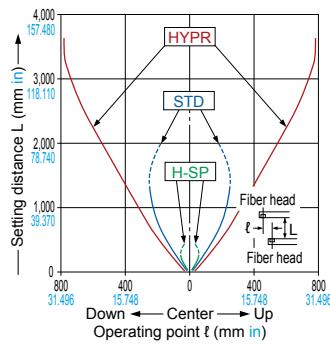

**FT-Z20HBW**

Thru-beam type


#### Horizontal direction

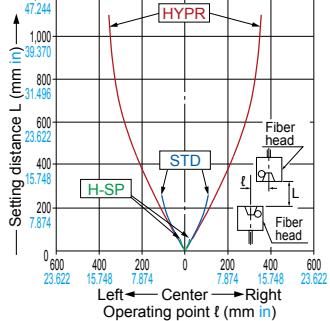


Thru-beam type

**FT-Z20W**

#### Horizontal direction

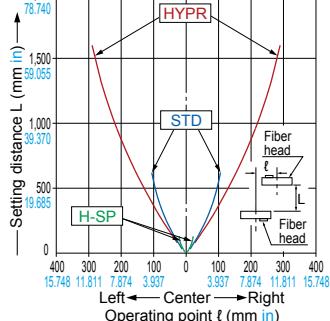

#### Vertical direction

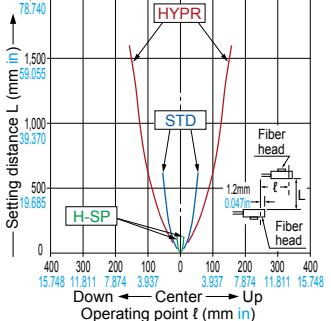


## SENSING CHARACTERISTICS (TYPICAL)

### Thru-beam type Parallel deviation

Sensing characteristics are listed in the alphabetic order of Model No.


**FT-Z30**

#### Horizontal direction

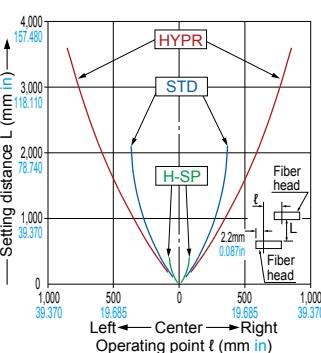


Thru-beam type

#### Vertical direction

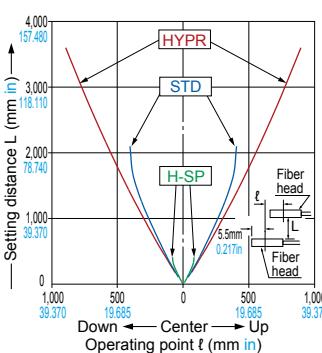


**FT-Z30E**

#### Horizontal direction

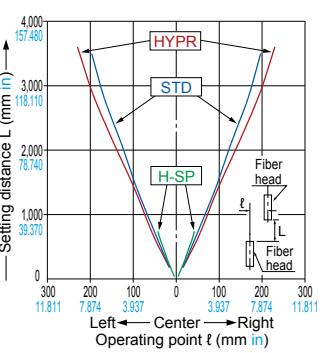


Thru-beam type

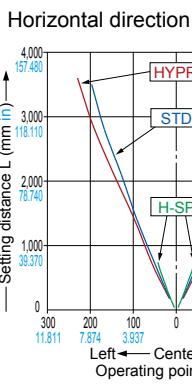


**FT-Z30EW**

#### Horizontal direction

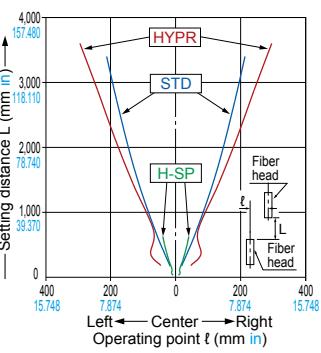


Thru-beam type

#### Vertical direction

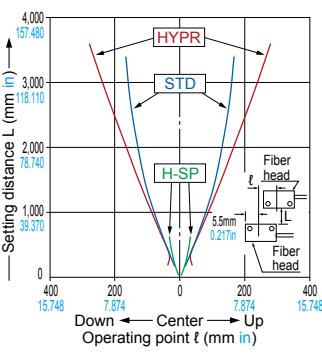


**FT-Z30H**

#### Horizontal direction

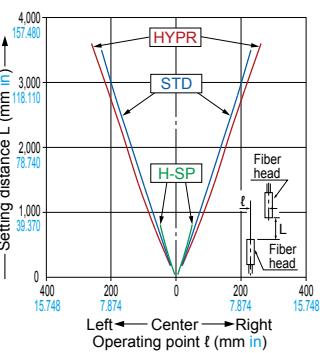


Thru-beam type

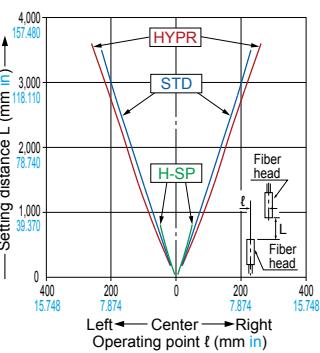


**FT-Z30HW**

#### Horizontal direction

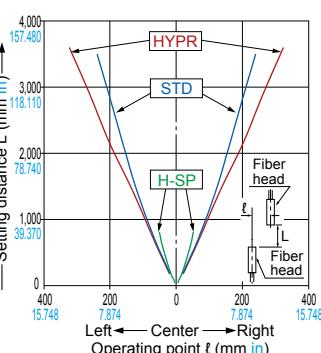


Thru-beam type

#### Vertical direction

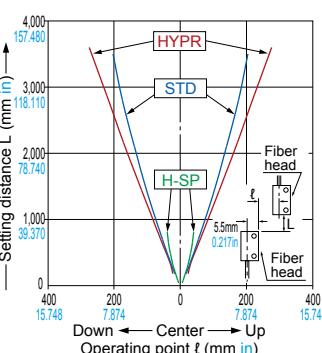


**FT-Z30W**

#### Horizontal direction

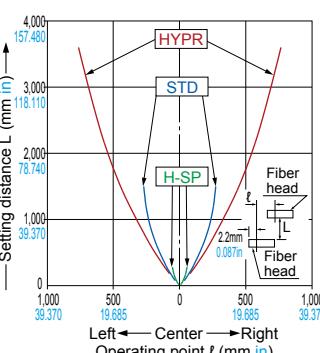


Thru-beam type

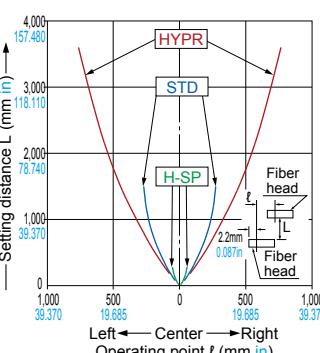


**FT-Z40W**

#### Horizontal direction

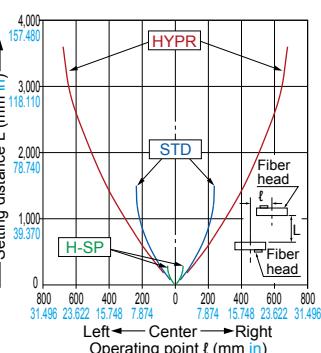


Thru-beam type

#### Vertical direction

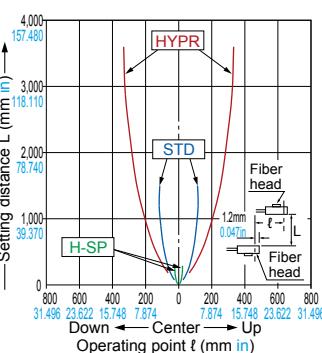


**FT-Z40HBW**

Thru-beam type


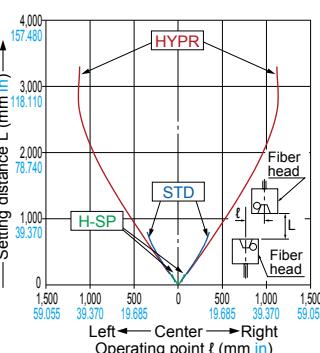


Thru-beam type

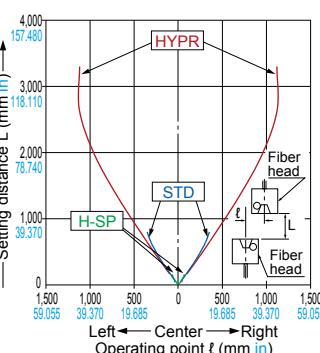

**FT-Z802Y**

Thru-beam type

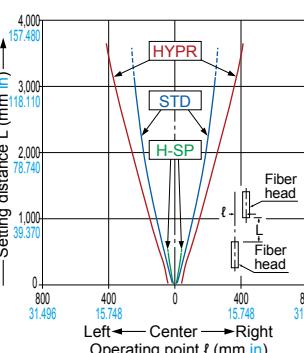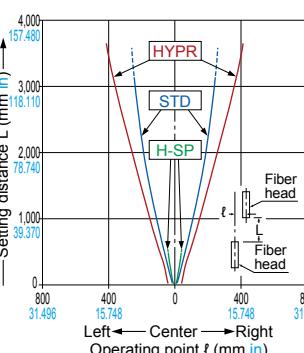


## SENSING CHARACTERISTICS (TYPICAL)

Retroreflective type Parallel deviation Sensing characteristics are listed in the alphabetic order of the Model No.

**FR-KZ22E**


Horizontal direction

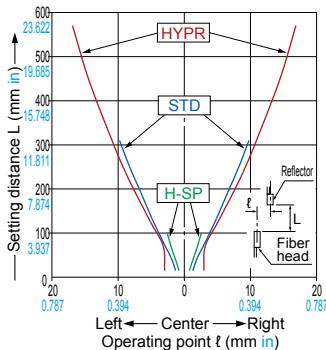

Retroreflective type


**FR-KZ50E**

Horizontal direction

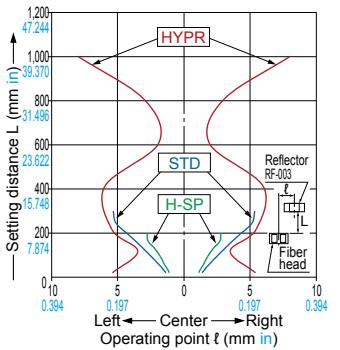


Retroreflective type

Vertical direction

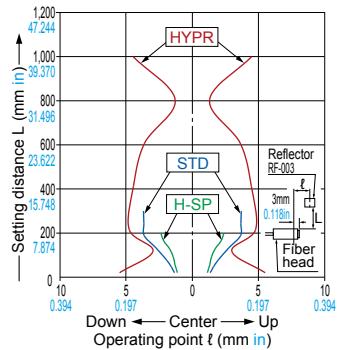


**FR-KZ50H**

Horizontal direction

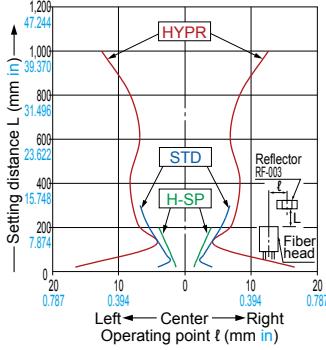

Retroreflective type


Vertical direction

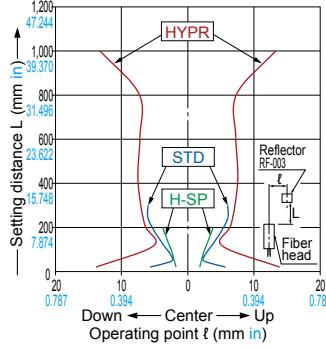


**FR-Z50HW**

With reflective tape RF-13 (attached)

Horizontal direction

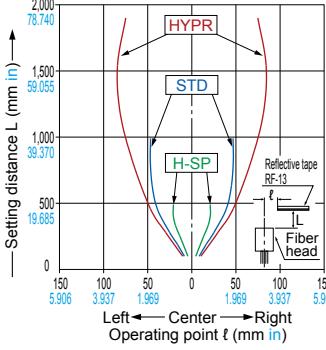


Vertical direction

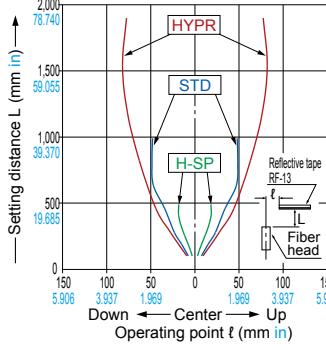


With reflector RF-230 (optional)

Horizontal direction

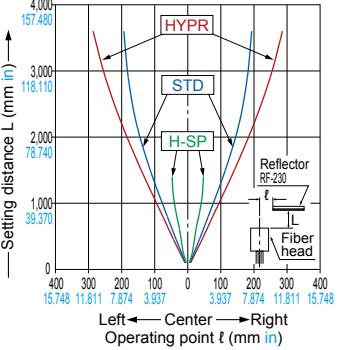

Vertical direction

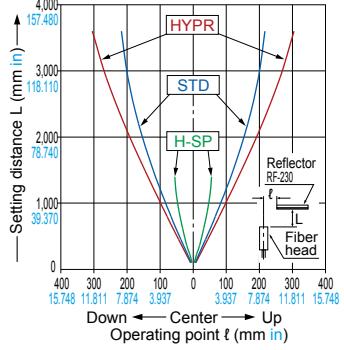


Reflective type Sensing field

Sensing characteristics are listed in the alphabetic order of the Model No.

**FD-30**


Horizontal direction

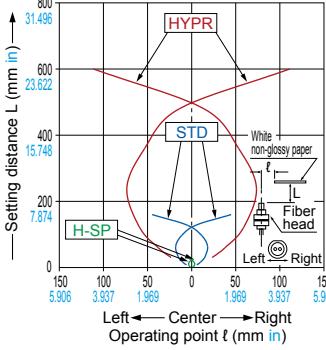

Reflective type


**FD-31**

Horizontal direction

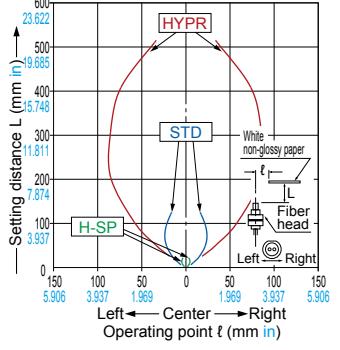

Reflective type

Vertical direction

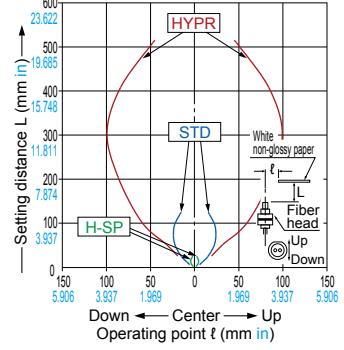


## SENSING CHARACTERISTICS (TYPICAL)

### Reflective type Sensing field

Sensing characteristics are listed in the alphabetic order of the Model No. (Models with same sensing characteristics are grouped together.)

FD-31W


#### Horizontal direction

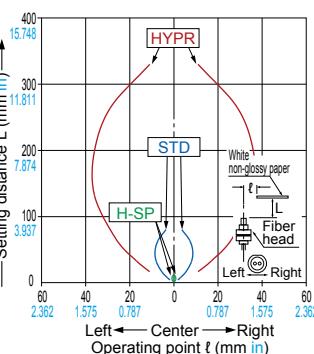

Reflective type


FD-32G

#### Vertical direction

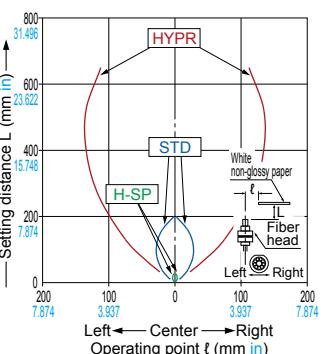


FD-32GX

#### Vertical direction

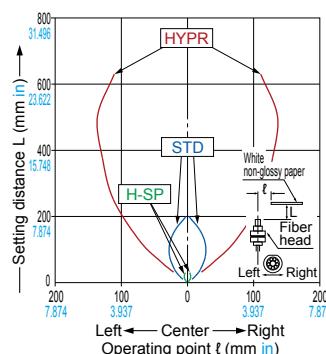


FD-34G FD-S34G

Reflective type

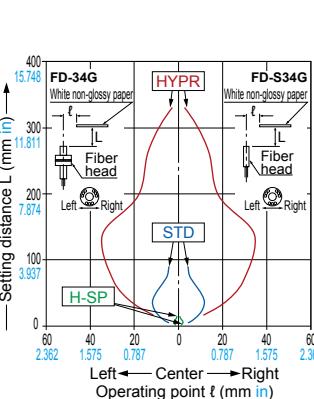

FD-40


#### Horizontal direction

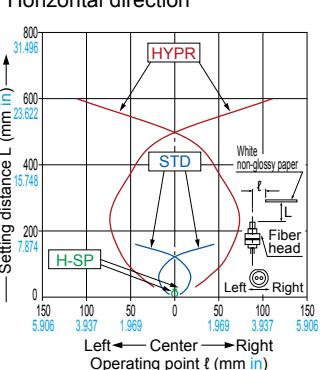

Reflective type

FD-41


#### Horizontal direction

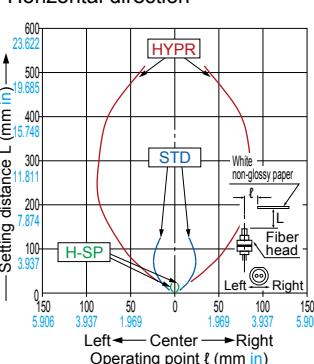

Reflective type

FD-41S


#### Horizontal direction

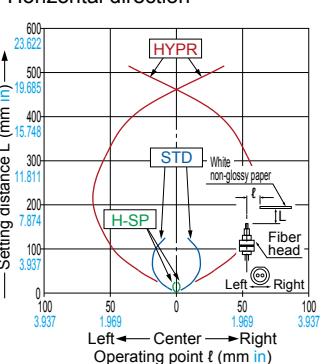

Reflective type

FD-41SW


#### Horizontal direction

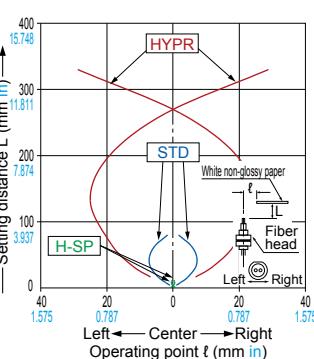

Reflective type

FD-41W

#### Horizontal direction

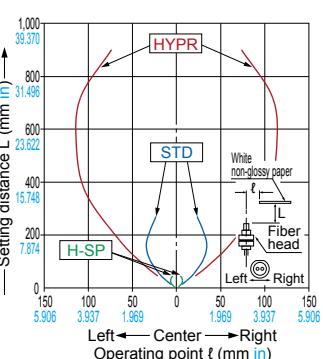

Reflective type

FX-500

FX-550





FX-100

FX-410

## SENSING CHARACTERISTICS (TYPICAL)


### Reflective type Sensing field

Sensing characteristics are listed in the alphabetic order of the Model No.

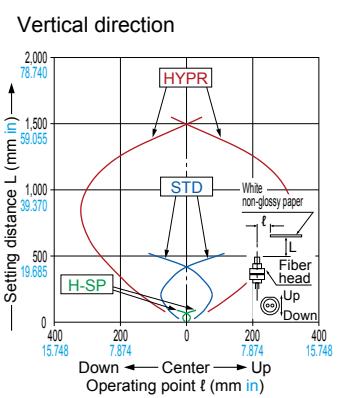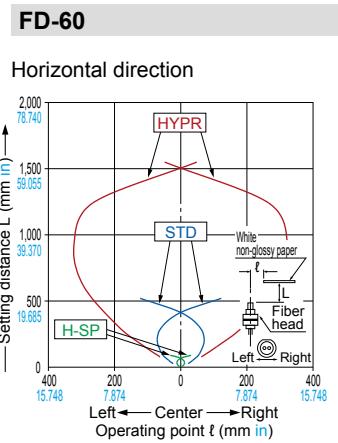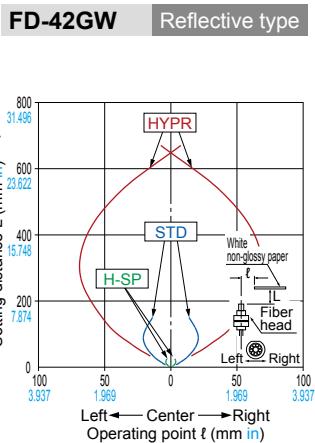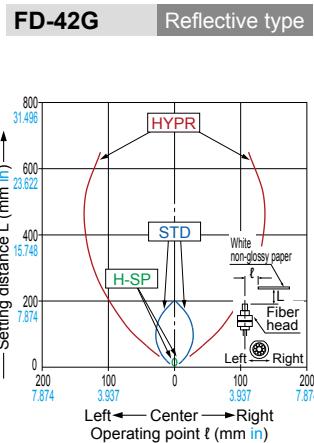


**FD-61**


Horizontal direction

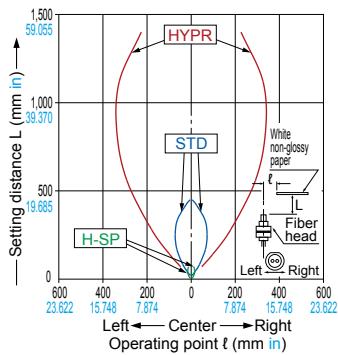

Vertical direction

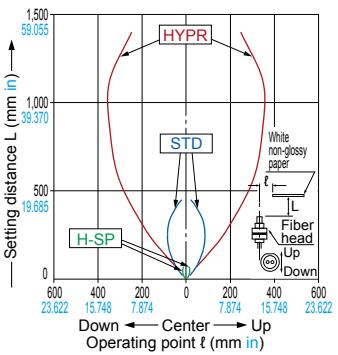


**FD-61G** Reflective type

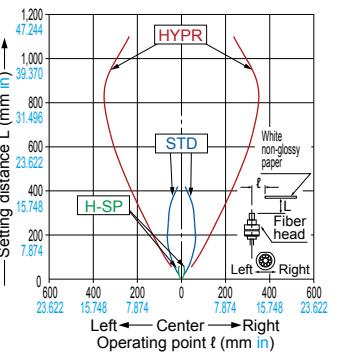


Reflective type

**FD-61S**

Horizontal direction

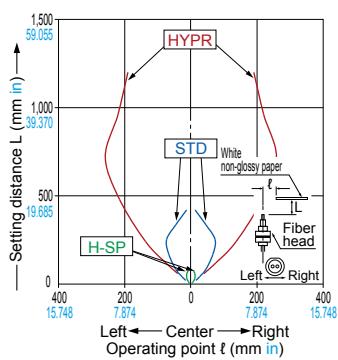


Vertical direction

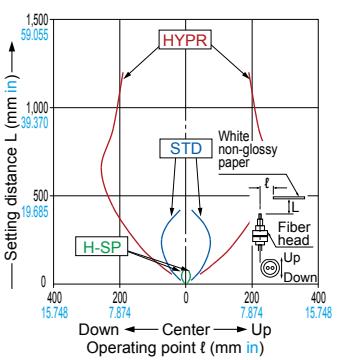


**FD-61W**

Horizontal direction

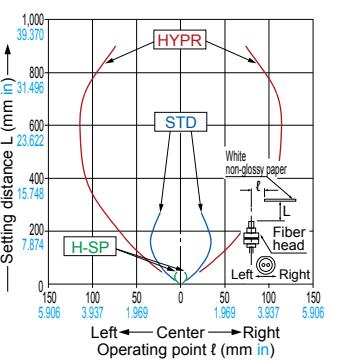


Vertical direction

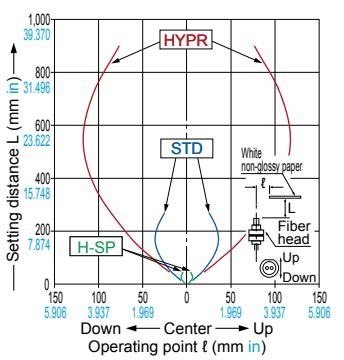


**FD-62**

Horizontal direction

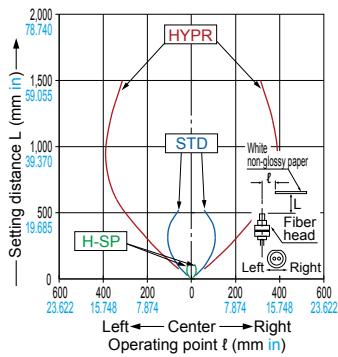


Vertical direction

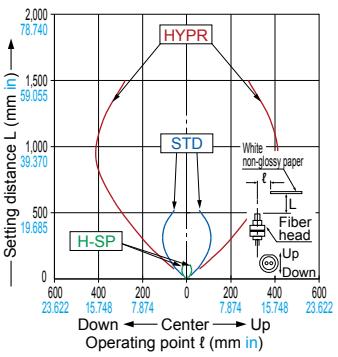


**FD-64X**

Horizontal direction

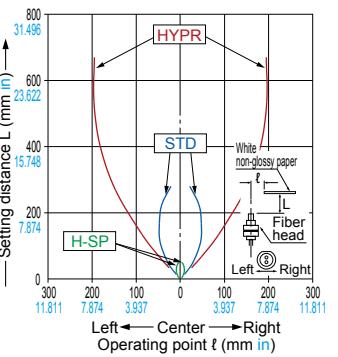

Vertical direction

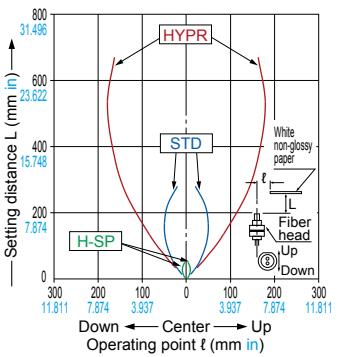


## SENSING CHARACTERISTICS (TYPICAL)

### Reflective type Sensing field

Sensing characteristics are listed in the alphabetic order of the Model No.


FD-A16

#### Horizontal direction

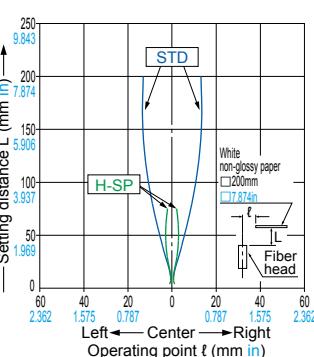


Reflective type

#### Vertical direction

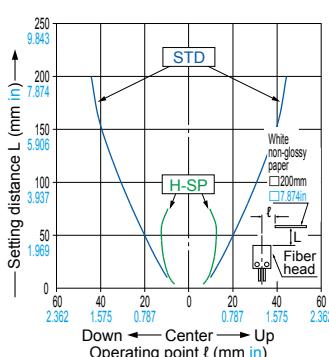


FD-E13

#### Horizontal direction

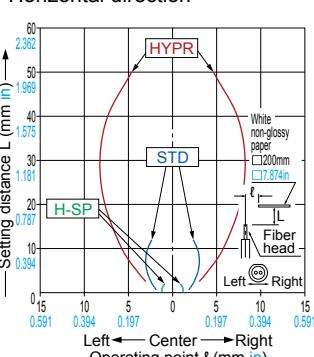


Reflective type


#### Vertical direction

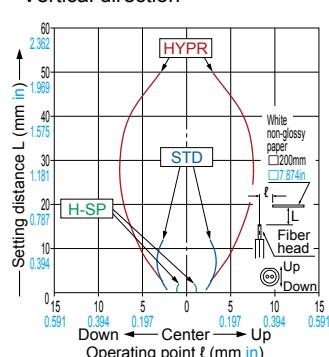

FD-EG30S Reflective type

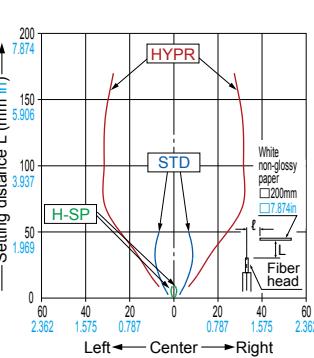


FD-EG31 Reflective type

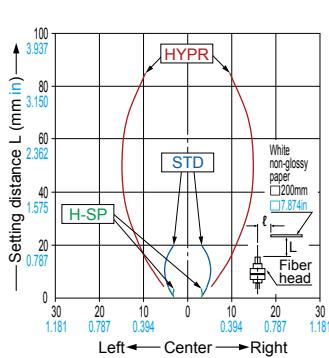


FD-AL11

#### Horizontal direction

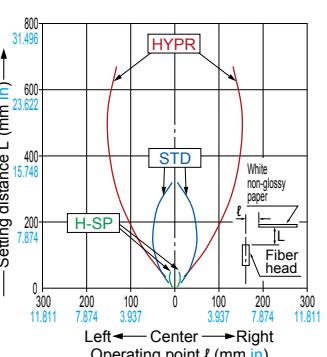


Reflective type

#### Vertical direction

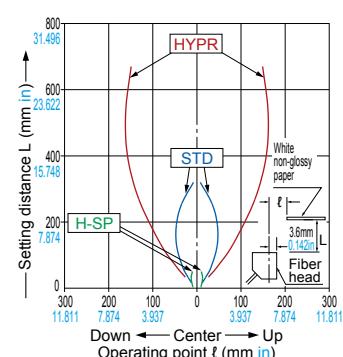


FD-E23


Reflective type

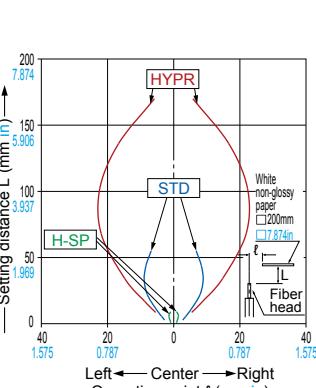

FD-EG30 Reflective type

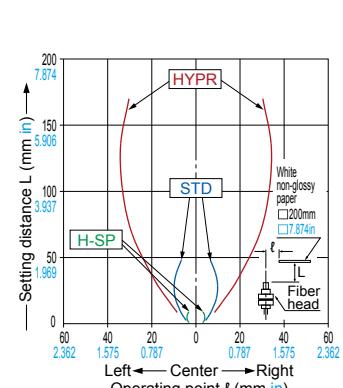


FD-H13-FM2 Reflective type

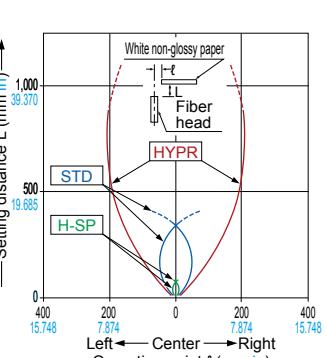


FD-H18-L31

Reflective type

#### Horizontal direction

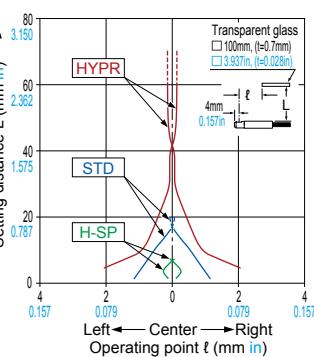


#### Vertical direction

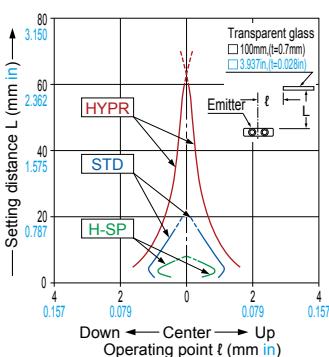


FD-H20-21

Reflective type

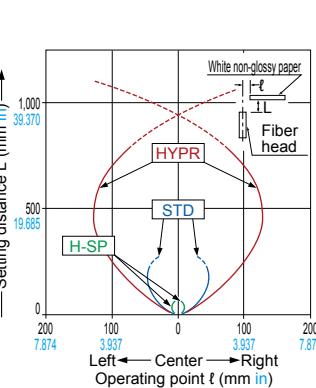

FD-H20-M1 Reflective type

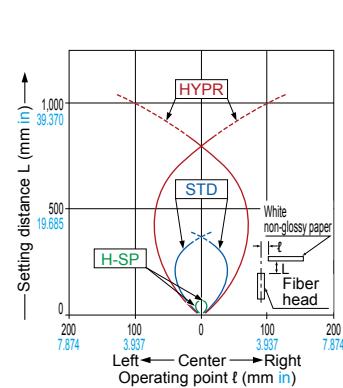


## SENSING CHARACTERISTICS (TYPICAL)

**Reflective type Sensing field** Sensing characteristics are listed in the alphabetic order of the Model No. (Models with same sensing characteristics are grouped together.)

**FD-H25-L43**


Horizontal direction

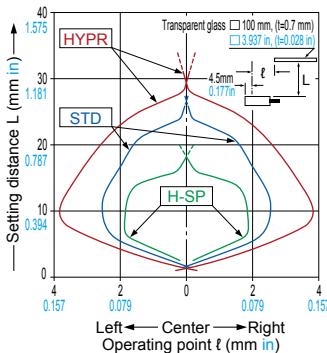


Reflective type

**FD-H25-L45**

Horizontal direction

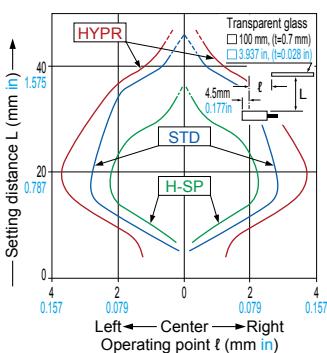


Vertical direction

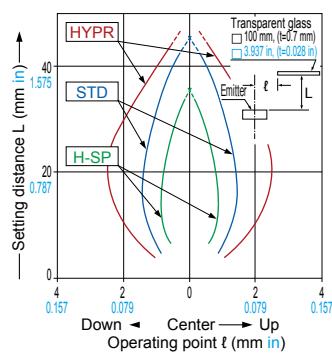

**FD-H30-L32**


Horizontal direction

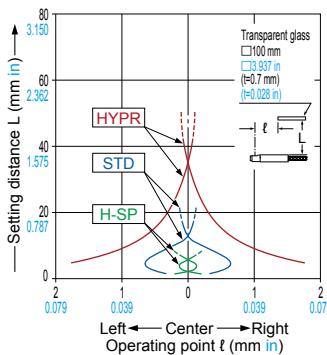


Reflective type

**FD-H30-L32V-S**


Horizontal direction

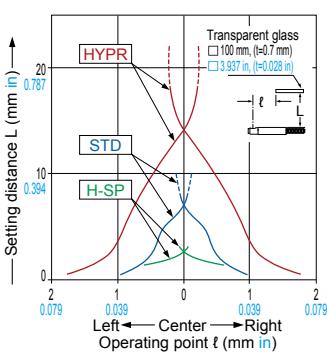


Vertical direction

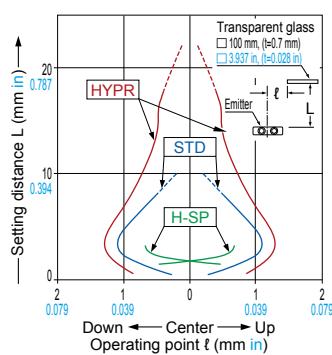

**FD-H35-20S** Reflective type

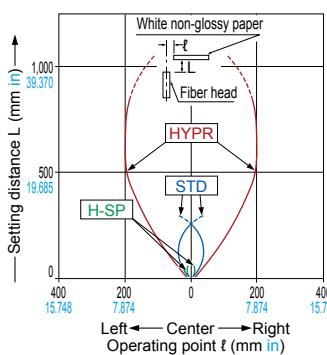


**FD-H35-M2** Reflective type

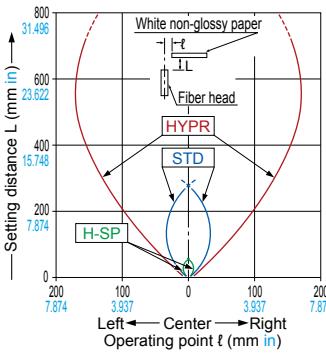


**FD-L10**

Horizontal direction

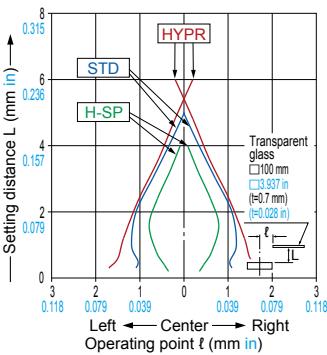


Vertical direction

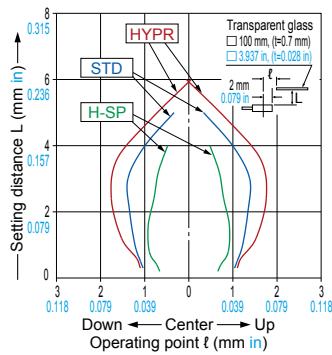

**FD-L11**

Reflective type


Horizontal direction

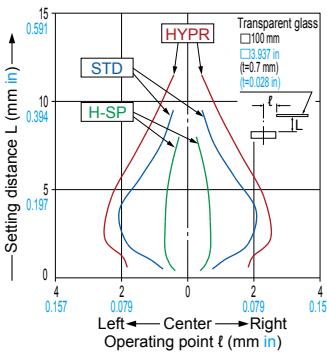


**FD-L12W**

Reflective type

Horizontal direction

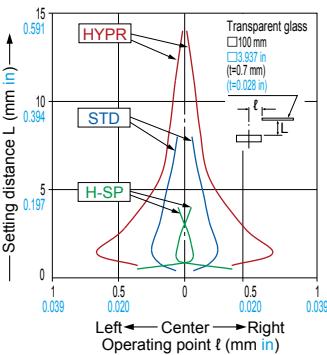

Vertical direction

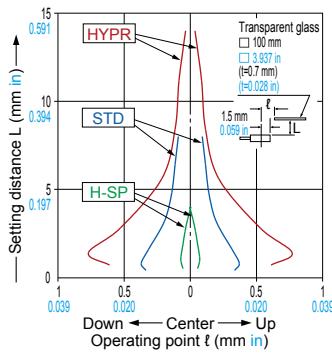

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

SAFETY LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC CONTROL DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY MANAGEMENT SOLUTIONS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Fibers

Fiber Amplifiers

Other Products

FX-500

FX-100


FX-410

## SENSING CHARACTERISTICS (TYPICAL)

**Reflective type Sensing field** Sensing characteristics are listed in the alphabetic order of the Model No.

FD-L20H


Horizontal direction

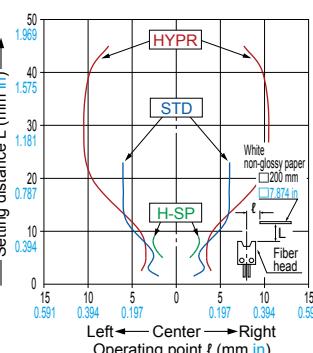

Reflective type

FD-L21W


Horizontal direction

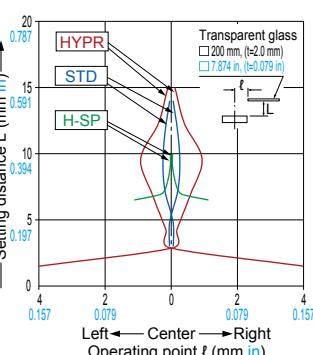

Reflective type

FD-L23


Horizontal direction

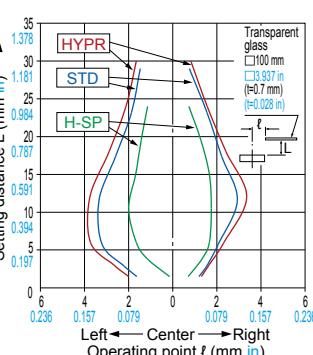


Reflective type

FD-L31A

Horizontal direction

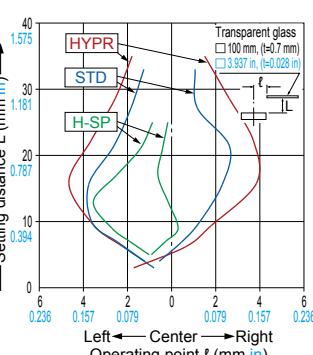


Reflective type

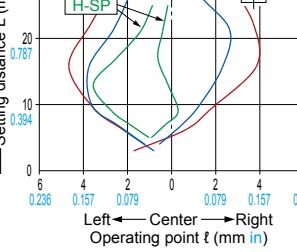

Reflective type

FD-L21


Horizontal direction

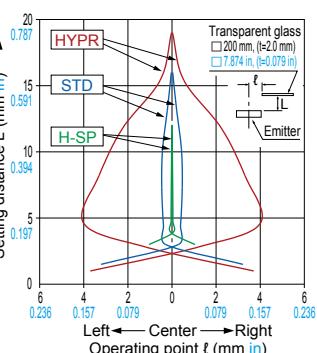

Reflective type

FD-L22A


Horizontal direction

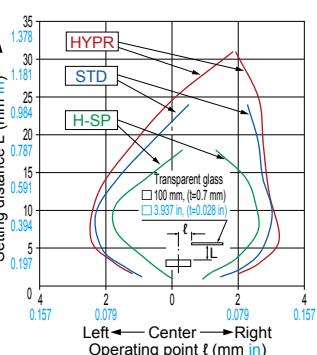

Reflective type

FD-L30A


Horizontal direction

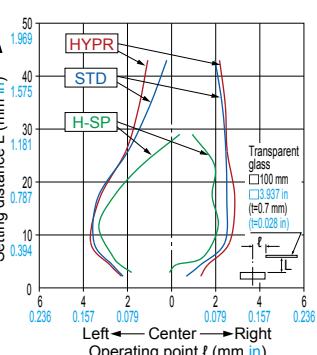



Reflective type

FD-L32H

Horizontal direction

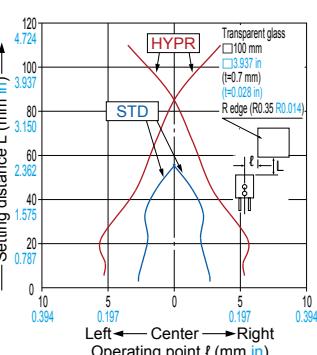

Reflective type

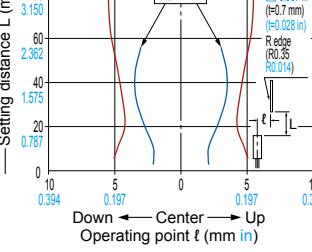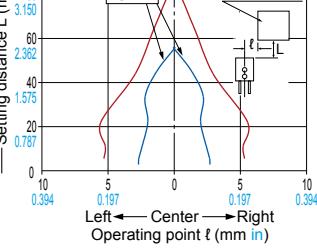


## SENSING CHARACTERISTICS (TYPICAL)


### Reflective type Sensing field

Sensing characteristics are listed in the alphabetic order of the Model No.


**FD-R31G** Reflective type

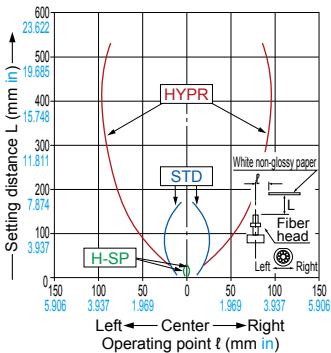


**FD-R32EG** Reflective type

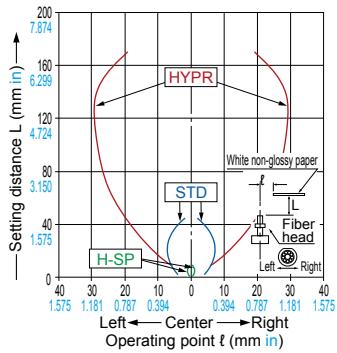

**FD-R33EG** Reflective type

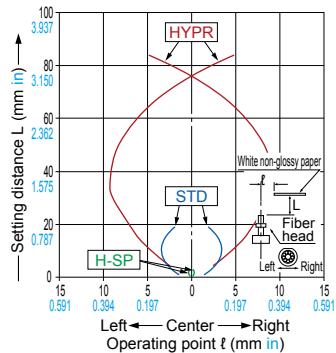


**FD-R34EG** Reflective type

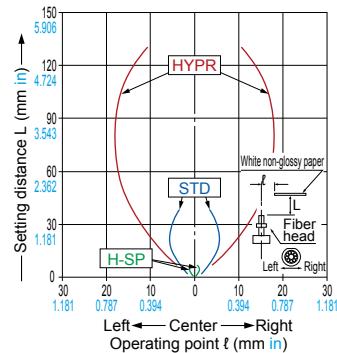


**FD-R41**

#### Horizontal direction

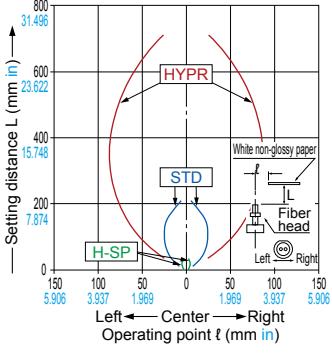


**FD-R60** Reflective type

#### Vertical direction

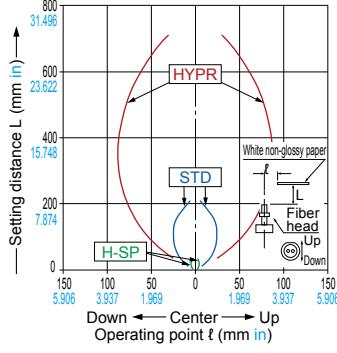


**FD-R60**

#### Horizontal direction

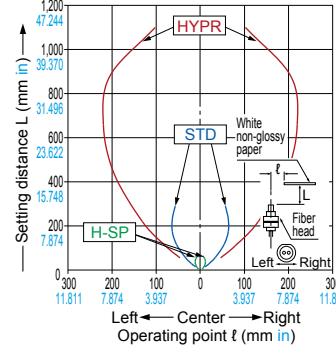


**FD-R60**

#### Vertical direction

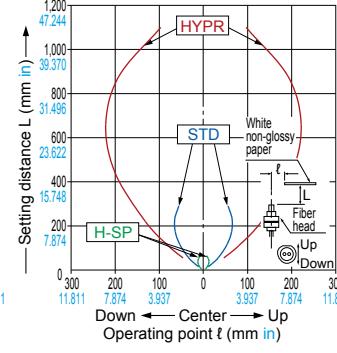


**FD-R61Y**

#### Horizontal direction

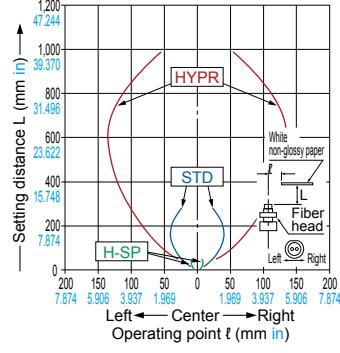


**FD-S21** Reflective type

#### Vertical direction

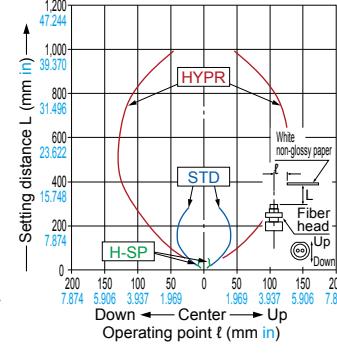


**FD-S21**

#### Horizontal direction

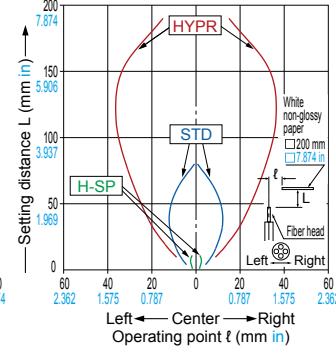


**FD-S21**

#### Vertical direction

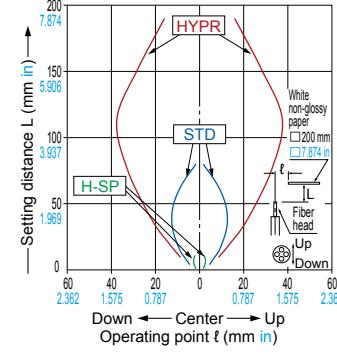


**FD-S30**

#### Horizontal direction

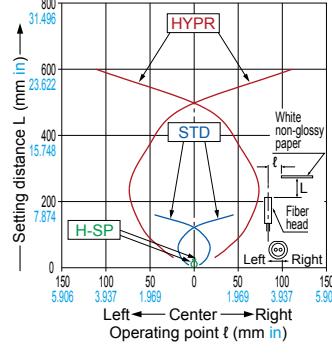


**FD-S31** Reflective type


#### Vertical direction

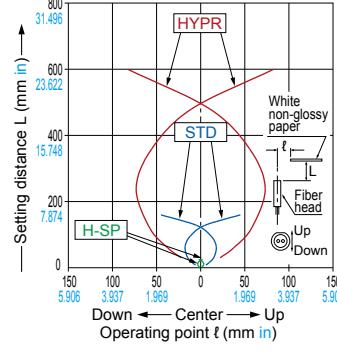

#### Horizontal direction

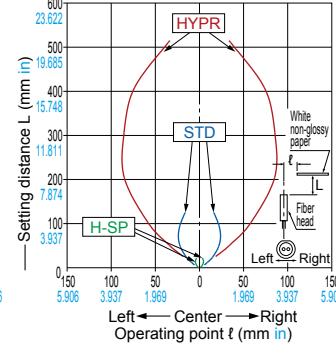

#### Vertical direction

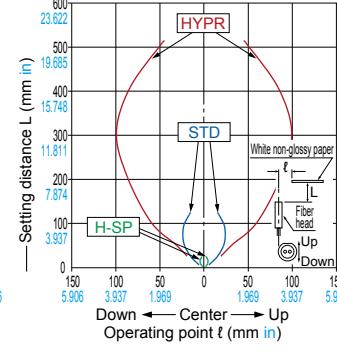


## SENSING CHARACTERISTICS (TYPICAL)

### Reflective type Sensing field

Sensing characteristics are listed in the alphabetic order of the Model No.


**FD-S32**

#### Horizontal direction

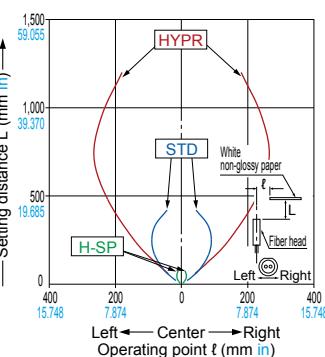


Reflective type

#### Vertical direction

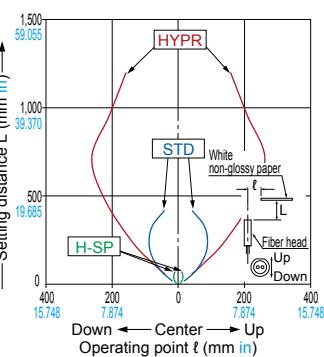


**FD-S32W**

#### Horizontal direction

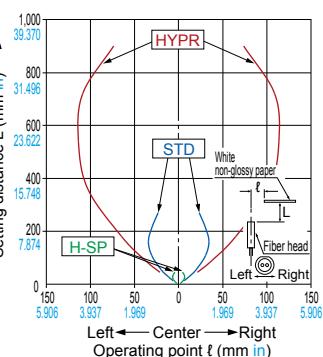


Reflective type


#### Vertical direction

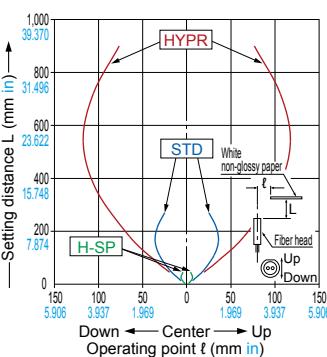

**FD-S33GW** Reflective type

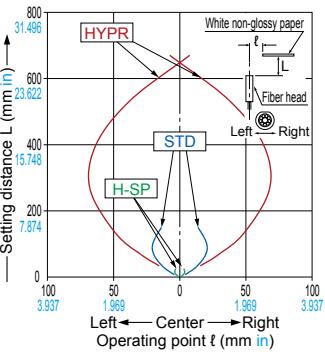


**FD-S60Y**

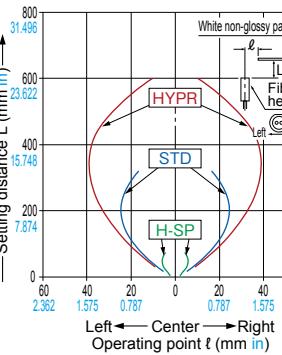


Reflective type

#### Vertical direction

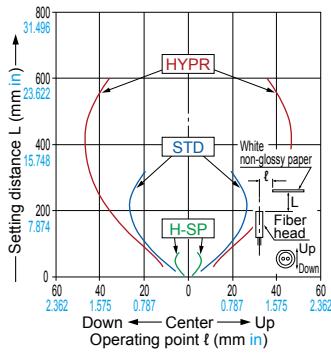


**FD-V30**

#### Horizontal direction

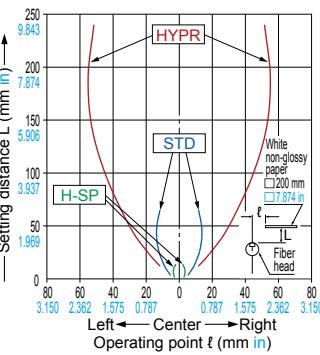


Reflective type

#### Vertical direction

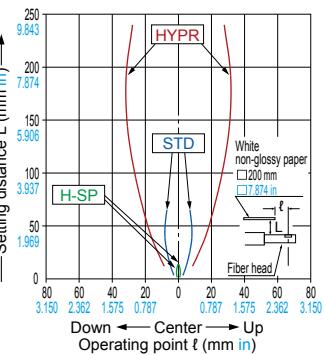


**FD-V30W**

#### Horizontal direction

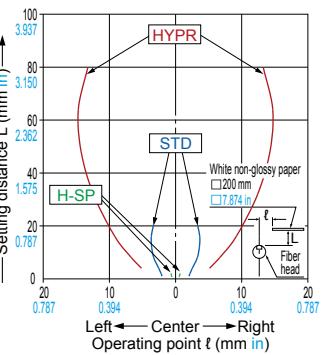


Reflective type

#### Vertical direction

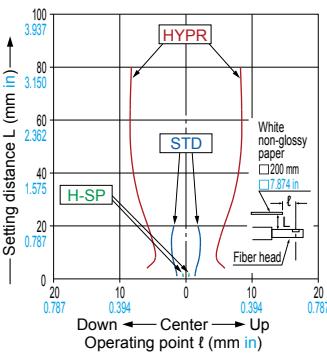


**FD-V50**

#### Horizontal direction

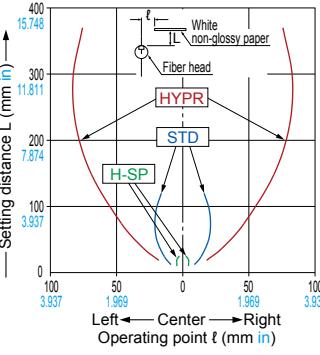


Reflective type

#### Vertical direction

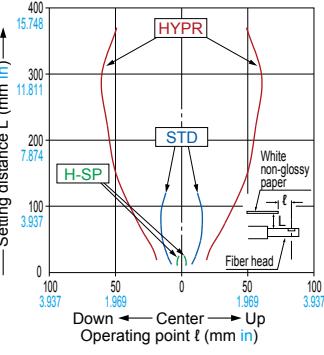


**FD-Z20HBW**

#### Horizontal direction

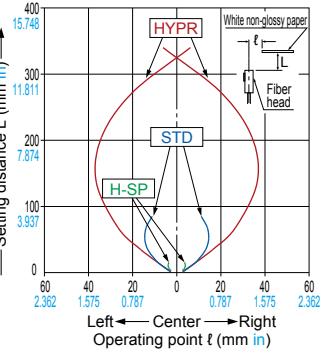

Reflective type

#### Vertical direction

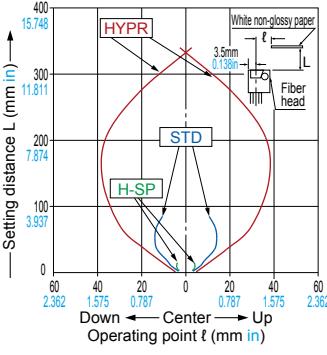


## SENSING CHARACTERISTICS (TYPICAL)

**Reflective type Sensing field** Sensing characteristics are listed in the alphabetic order of the Model No.

**FD-Z20W**


Horizontal direction

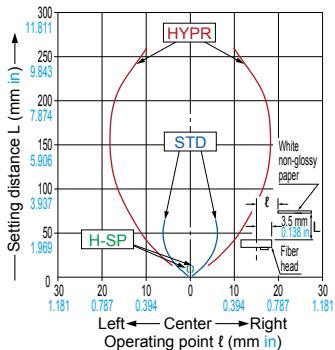

Reflective type

**FD-Z40HW**


Horizontal direction

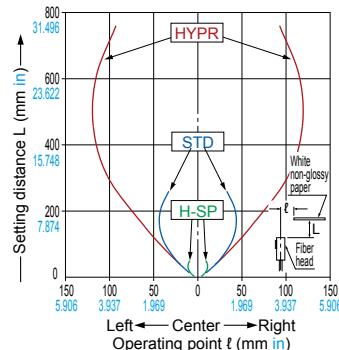

Reflective type

**FD-Z40W**


Horizontal direction

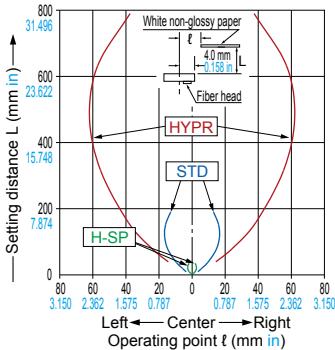


Reflective type

**FD-Z50HW**

Horizontal direction

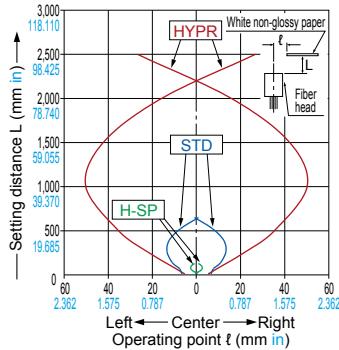

Reflective type

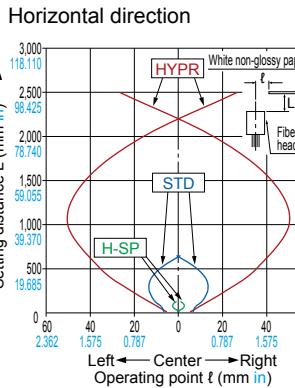

## PRECAUTIONS FOR PROPER USE



- Never use this product as a sensing device for personnel protection.
- In case of using sensing devices for personnel protection, use products which meet laws and standards, such as OSHA, ANSI or IEC etc., for personnel protection applicable in each region or country.

- Make sure to use the quick-connection cable (optional) for the connection of the controller. Extension up to total 100 m 328.084 ft is possible with 0.3 mm<sup>2</sup> or more, cable. However, in order to reduce noise, make the wiring as short as possible.
- Make sure that stress by forcible bending or pulling is not applied to the sensor cable joint and fiber cable.

### Wiring

- Make sure that the power supply is OFF while adding or removing the amplifiers.
- Note that if a voltage exceeding the rated range is applied, or if an AC power supply is directly connected, the product may get burnt or damaged.
- Note that short-circuit of the load or wrong wiring may burn or damage the product.
- Do not run the wires together with high-voltage lines or power lines, or put them in the same raceway. This can cause malfunction due to induction.
- Verify that the supply voltage variation is within the rating.
- If power is supplied from a commercial switching regulator, ensure that the frame ground (F.G.) terminal of the power supply is connected to an actual ground.
- In case noise generating equipment (switching regulator, inverter motor, etc.) is used in the vicinity of this product, connect the frame ground (F.G.) terminal of the equipment to an actual ground.

### Others

- This product has been developed / produced for industrial use only.
- The specification may not be satisfied in a strong magnetic field.
- The ultra long distance (U-LG, HYPR) mode is more likely to be affected by extraneous noise since the sensitivity of that is higher than the other modes. Make sure to check the environment before use.
- Do not use during the initial transient time (H-SP, FAST, STD: 0.5 sec., LONG, U-LG, HYPR: 1 sec.) after the power supply is switched ON.
- These sensors are only for indoor use.
- Avoid dust, dirt, and steam.
- Make sure that the product does not come in contact with oil, grease, organic solvents such as thinner, etc., strong acid or alkaline.
- This product cannot be used in an environment containing inflammable or explosive gases.
- Never disassemble or modify this product.
- This product adopts EEPROM. Settings cannot be done a million times or more because of the EEPROM's lifetime.

Refer to p.1552 ~ for general precautions.  
Refer to the "PRO mode operation manual" on our website for details.



## MEMO

