


Motors for Air Conditioning

AR-U2

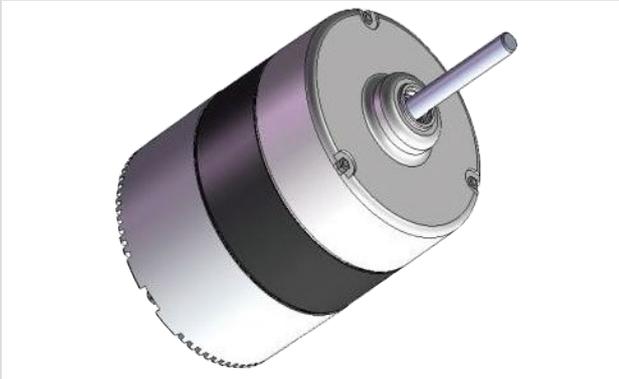


Features

- Rated Output: 375 W to 750 W
- Robust against moisture intrusion
- Motor windings: Cu or Al available
- 10 Pole structure for high efficiency and low noise/vibration
- Serial communication available with integrated controller/CPU
- Application: Unitary HVAC (NEMA 48)


Specifications

Range of rated voltage (for motor)	(AC) (V)	120 / 240
	(DC) (V)	280 to 339
Rated Output	(W)	375 to 750
Range of speed	(r/min)	200 to 1500
Operating temperature	(°C)	0 to 55
Operating ambient humidity	(% RH)	95 max.
Motor installation	Motor shaft vertical upward, downward and horizontal	
Drive circuit	With control circuit	Sine wave drive, with communication function or Speed control for Vsp

Dimensions

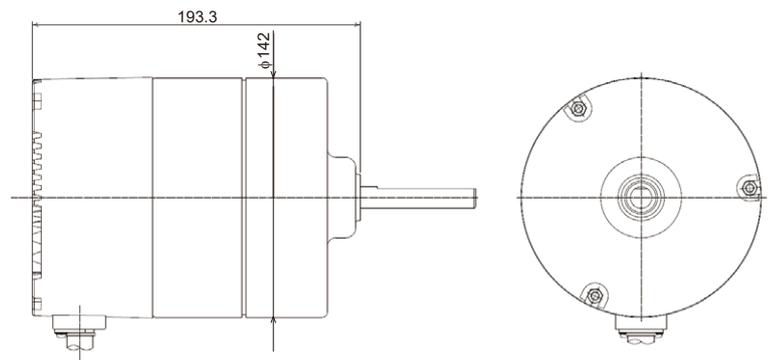

Characteristics (Reference)

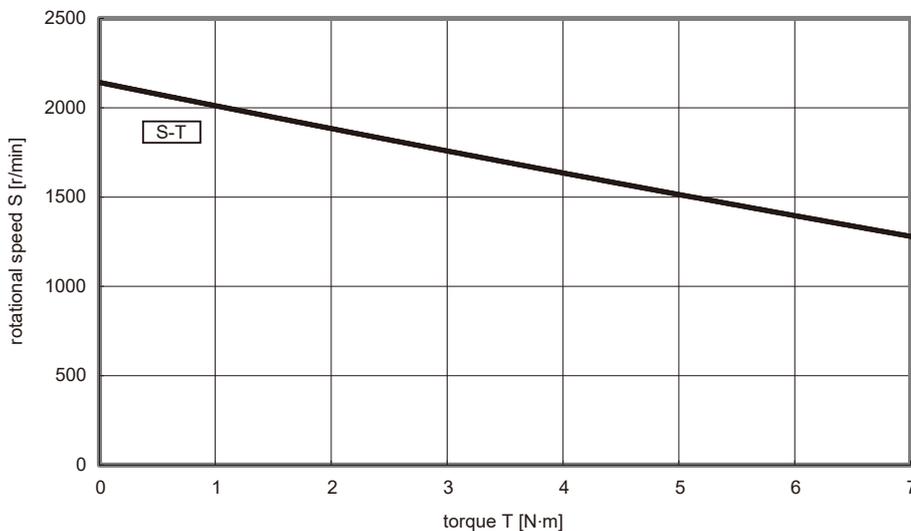

Voltage AC240 V
Output 750 W