

# CR1216 LITHIUM MANGANESE DIOXIDE



## Features & Benefits


- Good pulse capability
- High discharge characteristics
- Stable voltage level during discharge
- Long-term reliability

## Specifications


Nominal Capacity:	25 mAh
Nominal Voltage:	3V
Weight:	0.7g
Operating Temperature:	-30°C - +85°C*

\*Please consult Panasonic if expected temperature will exceed 70°C.


## Dimensions




## Temperature Characteristics

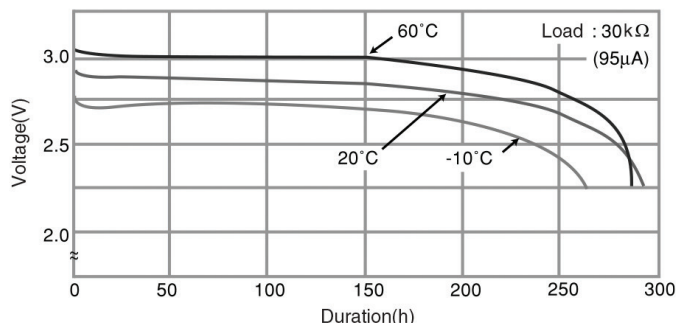

## Operating Voltage vs. Load Resistance (voltage at 50% discharge depth)

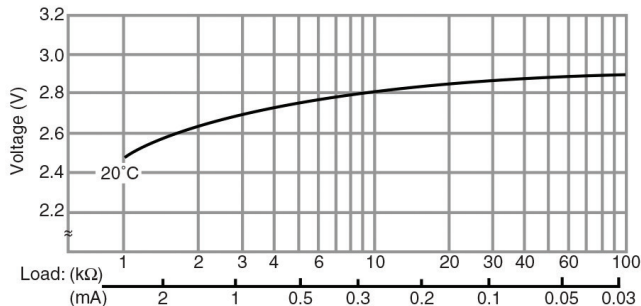

## Capacity vs. Load Resistance

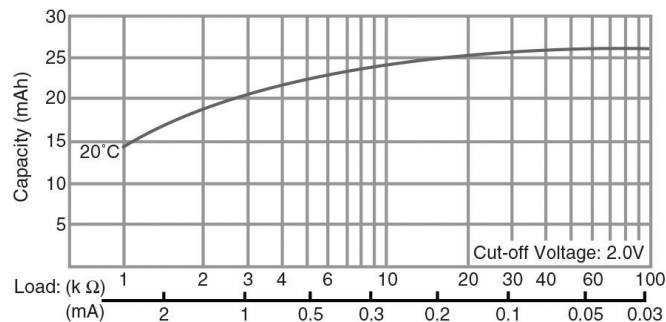

## ⚠ WARNING

Serious harm in as little as 2-hours if swallowed. **KEEP AWAY FROM CHILDREN.** Seek immediate medical help if swallowed. Have the doctor call the poison center at 1-(800) 498 8666 for US and Canada. International: 303-389-1300

Product manufacturers should design their products to meet the safety requirements of Annex I of UL60065 or equivalent standards.