


## Data Sheet

### Encapsulation Materials

### CV8580 series

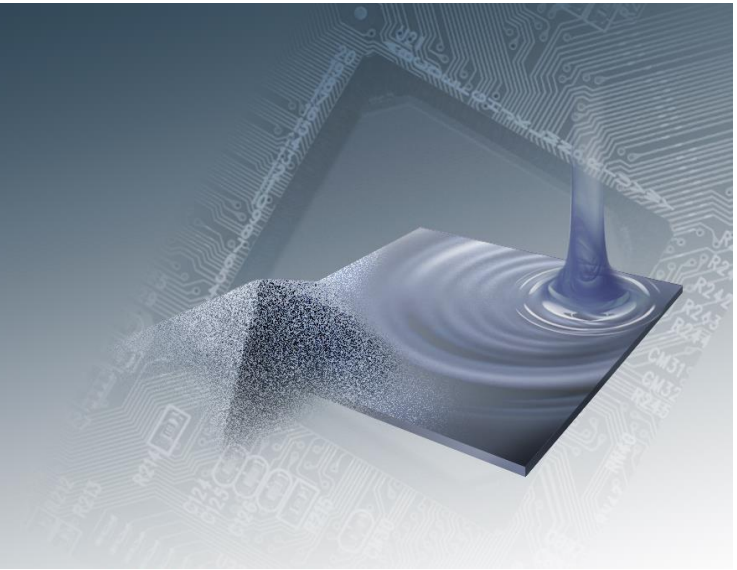

Sep. 2020 No.200908-2

Partnering to go beyond.

**Electronic Materials**  
Panasonic Corporation

# Specification

Property	Unit	Test Method	Condition	Typical Value
				CV8580MUA
Glass Trancelation Temp.(Tg)	°C	TMA	-	161
CTE-1	ppm/°C	TMA	<Tg	15
Flexural Modulus (@25°C)	GPa	JIS K6911	25°C	18
Filler Size (Max)	um	Design value	-	20
Mold Shrinkage	%	JIS K6911	25°C	0.21
Filler Type (FusedSilica/CrystallineSilica/Alumina)	-	Design value	-	Fused Silica
Filler Shape (Spherical/Flake)	-	Design value	-	Spherical
Filler Content (in Ash)	% wt	Design value	-	84
Filler size (Avg)	um	Design value	-	4-5
Sprrial Flow	cm	ASTM D3123	170°C	185
Gelation Time	sec	Curelasterometer	170°C	33
Viscosity (@175C)	Pa Sec	Flow tester	175°C	13
Specific gravity	-	JIS K6911	25°C	1.94
CTE-2	ppm/°C	TMA	>Tg	57
Flexural Strength(@25°C)	MPa	JIS K6911	25°C	160
Flexural Strength(@260°C)	MPa	JIS K6911	260°C	23
Flexural Modulus(@260°C)	GPa	JIS K6911	260°C	1.0
Dielectric Constant (1MHz)	-	JIS K6911	1MH z	4.2
Dissipation Factor (1MHz)	-	JIS K6911	1MH z	0.011
Flame Retardant (Yes/No)	-	Design value	-	Yes
Flamability	-	UL-94	94 V-0	V-0
Thermal Conductivity	W/mK	Hot wire method	25°C	0.97
Low Alpha Type (Yes/No)	-	Design value	-	Yes

\* The data in the above table are not guaranteed values.

## ++ Before purchase ++

### 【Notes before you use】

- Please verify the suitability and fitness for intended application by quality testing, evaluation or other means at your own option before any adoption, use or change of use conditions of a product listed in the datasheet.
- We would like to have a delivery specifications mutually agreed for the product that you have decided to use. The agreements defined in the delivery specifications are assigned higher priority.
- Please note that specifications and external design are subject to change for product improvement without notice.
- For details on products in the datasheet, please contact your distributor or our sales department.

### 【Safety Information】

- Before using the product, please read the delivery specifications carefully or contact the distributor from which you purchased the product or our sales department in order to use the product correctly.
- The products in the datasheet are Semiconductor encapsulation materials for electronic and electrical devices. Please do not use them for other than specified use.

### Please Contact us of more

#### 【Plant & Technical Marketing】

- Japan (Mie)  
TEL: 81-59-346-1131
- USA (Mountain View)  
TEL: 1-408-861-3946
- Austria (Enns)  
TEL: 43-7223-883
- China (Shanghai)  
TEL: 86-21-3855-2332
- Thailand (Ayutthaya)  
TEL: 66-3533-0846

#### 【Sales Offices】

- China (Shanghai) TEL: 86-21-3855-2332
- Singapore TEL: 65-6241-6754
- Philippines (Makati) TEL: 63-632-886-6291 to 94
- Korea (Seoul) TEL: 82-2-361-7873
- Taiwan (Hsin Chu) TEL: 886-3-598-3201
- Thailand (Ayutthaya) TEL: 66-3533-0846
- Austria (Enns) TEL: 43-7223-883
- USA (Mountain view) TEL: 1-408-861-3946
- Japan (Tokyo) TEL: 81-6-6904-2771

Panasonic Corporation  
Industrial Solutions Company  
Electronic Materials Business Division  
Head Office: 1006 Kadoma, Kadoma City, Osaka 571-8506  
TEL: 81-6-6908-1101

[industrial.panasonic.com/ww/electronic-materials](http://industrial.panasonic.com/ww/electronic-materials)

U.S. Sales office Web site  
<https://na.industrial.panasonic.com/products/electronic-materials>