


BR1225A

BR Coin-Type Lithium Primary Battery for high temperature

Features & Benefits

In addition to the appeal of our BR series coin-type lithium batteries, poly-carbonmonofluoride cells can operate in temperatures up to 125°C.

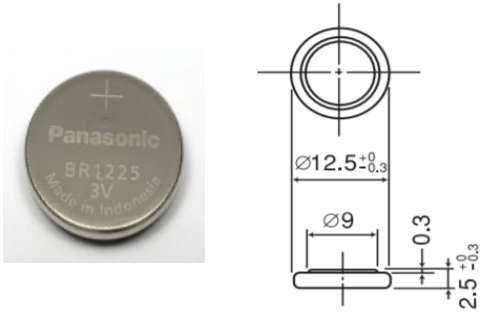

Terminal types

Please see the documents for the terminal and lead wire settings.

- [Line up of tab terminal types\(by shape\)](#)
- [Line up of tab terminal types\(by product number\)](#)


Applications

Automotive electronic components(TPMS, ETC), hot water and electricity meters, memory backup (host computers, FA equipment), etc.

Nominal voltage	3V	
Nominal capacity	48mAh	
Continuous drain	0.03mA	
Dimensions*1	Diameter(Max.)	12.5mm
	Height(Max.)	2.5mm
Weight*1	Approx. 0.8g	
Operating temperature	-40°C to +125°C	

*1 Without tabs.

Discharge temperature characteristics

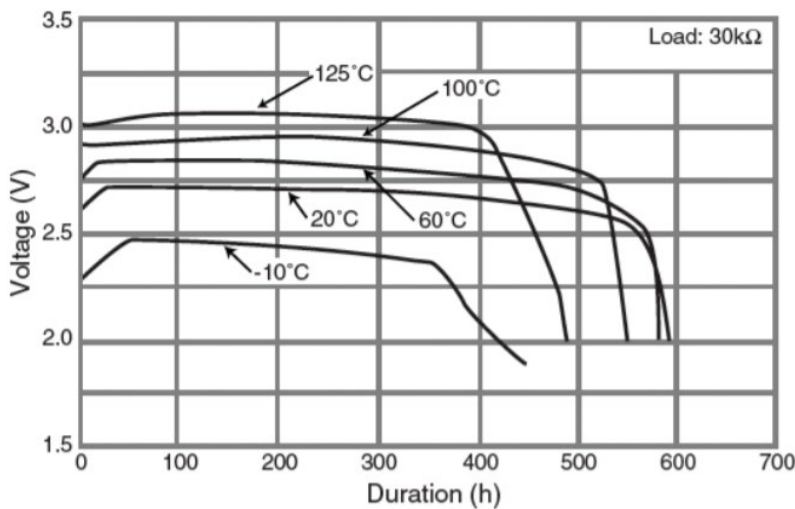

WARNING

Serious harm in as little as 2-hours if swallowed. KEEP AWAY FROM CHILDREN. Seek immediate medical help if swallowed. Have the doctor call the poison center at 1-(800) 498 8666 for US and Canada. International: 303-389-1300

Product manufacturers should design their products to meet the safety requirements of Annex I of UL60065 or equivalent standards.

Panasonic Energy Co., Ltd.

For more information on how Panasonic can assist you with your battery power solution needs call 877-726-2228, visit www.na.industrial.panasonic.com/products/batteries or e-mail oembatteries@us.panasonic.com.

As of April, 2022. Panasonic offers batteries with tabs or lead wires. This data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty. The contents of this product information are subject to change without notice.

