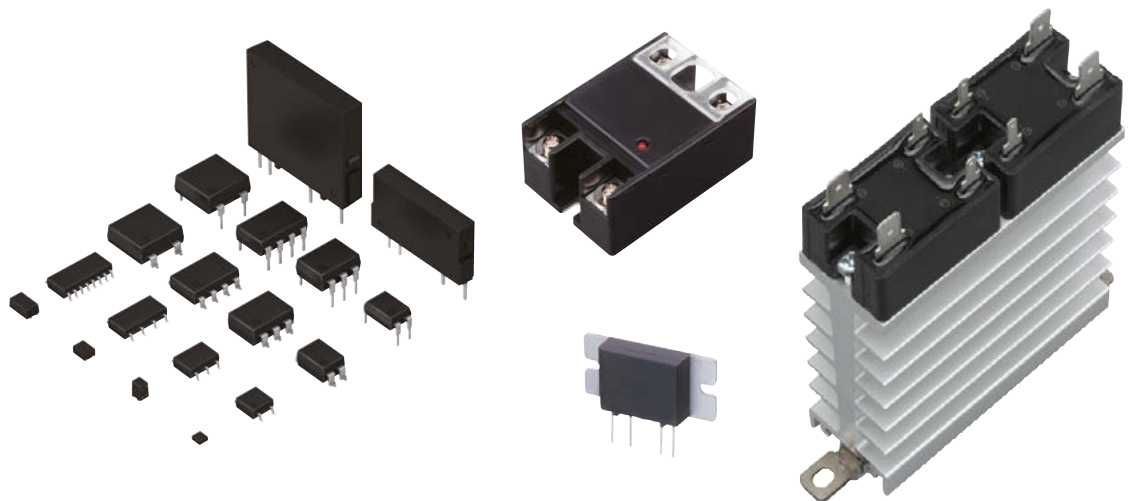



# PhotoMOS<sup>®</sup> Phototriac Coupler Solid State Relays

SELECTION GUIDE

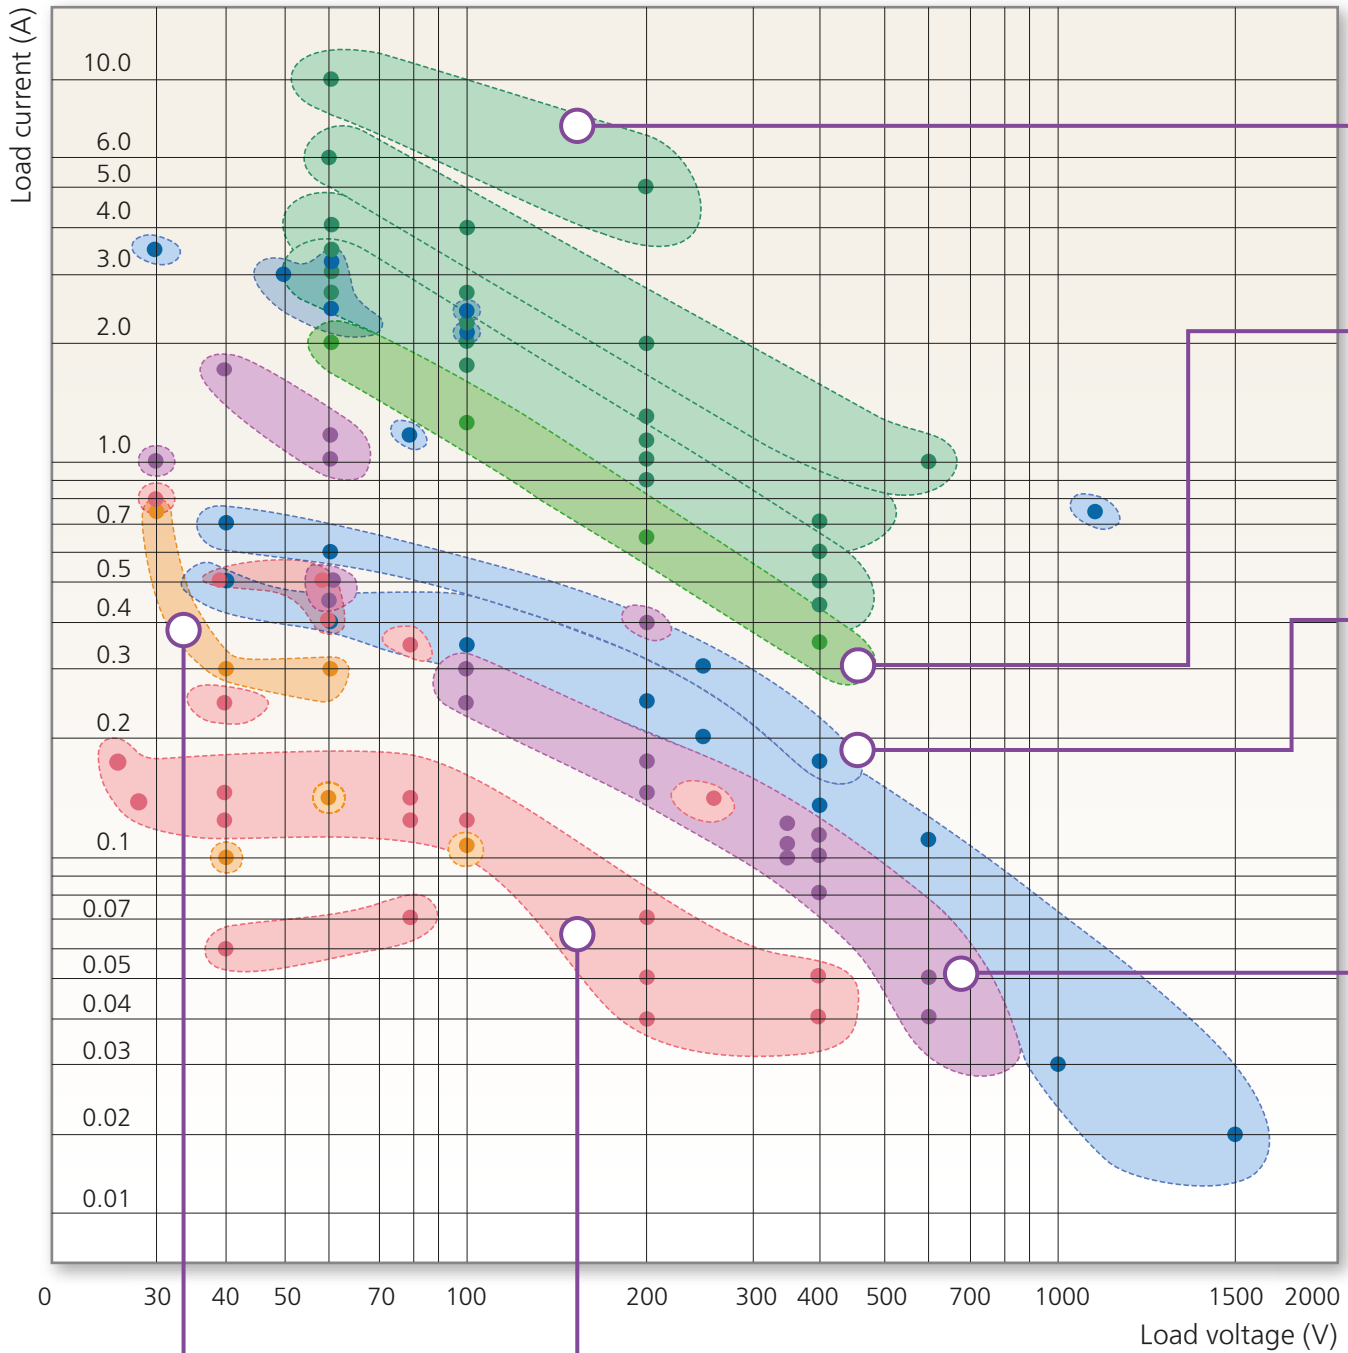
# IN Better Solution





## INDEX

◆ PhotoMOS® Types and typical applications .....	2
◆ PhotoMOS® Quick Reference.....	4
◆ PhotoMOS® Part No.System .....	10
◆ PhotoMOS® Selector Chart .....	11
◆ Photovoltaic MOSFET Drivers Selector Chart .....	46
◆ PhotoIC Coupler Selector Chart .....	47
◆ Phototriac Coupler Selector Chart .....	48
◆ Solid State Relays Selector Chart .....	50
◆ Dimensions .....	57



\*About automotive applications | If you are considering to use PhotoMOS® for automotive applications, please contact your local Panasonic Corporation technical representative.

"PhotoMOS", "PhotoMOS " and "PHOTOMOS " are registered trademarks of Panasonic Holdings Corporation. Recognized in Japan, the United States, all member states of European Union and the other countries.

# PhotoMOS<sup>®</sup> support various core industries

**Slim & Power**

**Flat & Power**


Power type ( High Capacity )

Power type ( DC only )


Power type ( AC/DC dual use )

PD type

- Energy management
- Photovoltaic power generation
- Storage battery



- Robots
- Machine tools
- Industrial machines



**Low on-resistance**


**Low on-resistance & Economical**

HF type ( DC only )

HF type ( AC/DC dual use )

HE type

- Office equipment
- Industrial machines
- Measuring instruments



**General use**

**Economical & General**


**High sensitivity**

GU type

GE type

HS type


- Game machines
- Security systems
- Data communications



**Low on-resistance & Low output capacitance**

RF type


- Data communications
- Measuring instruments
- Medical equipment



**Low current consumption & Guaranteed performance at high temperature**

CC type

- Probe cards
- Measuring instruments



- **PD** : Power DIP
- **RF** : Radio Frequency
- **HS** : High Sensitivity
- **HF** : High Functioned
- **GU** : General Use
- **CC** : Capacitor Coupled
- **HE** : High functioned and Economical
- **GE** : General use and Economical

Panasonic Industry Co., Ltd. Electromechanical Control Business Division  
[industrial.panasonic.com/ac/e/](http://industrial.panasonic.com/ac/e/)

— 3 —

©Panasonic Industry Co., Ltd. 2022 ASCTB312E 202209

# PhotoMOS<sup>®</sup> Quick Reference

Output configuration	Load voltage (V)	Continuous load current (A)	On resistance Typ. (Ω)	Package						
				TSON	VSSOP	SON	SSOP	SOP4	SOP6	SOP8
1 Form A	20	0.18	2.8		AQY221N5TY		AQY221N5VY			
	25	0.15	5.5		AQY221N3TY	AQY221N3MY	AQY221N3VY			
	30	0.75	0.2	AQY2C1R6PX						
		0.8	0.18		AQY221R6TY					
		1	0.18					AQY221R6VY		
		1	0.25							
		3.5	0.035							
	40	0.1	10.5	AQY2C1R3PX						
		0.12	9.5		AQY221N2TY	AQY221N2MY	AQY221N2VY	AQY221N2S		
		0.25	0.75~0.8		AQY221R2TY	AQY221R2MY	AQY221R2VY	AQY221R2S		
		0.3	0.8	AQY2C1R2PX						
		0.5	0.55				AQY221R4VY			
		0.5	0.6							
		0.7	0.3							
		1.6	0.1						AQY211G2S	
	50	3	0.04						AQV252G2S	
	60	0.3	0.9	AQY2C2R2PX						
		0.4	0.74~0.8		AQY222R2TY		AQY222R2VY			
		0.5	0.55							
		0.5	0.8~0.85					AQY212S AQY222R1S AQY232S	AQV212S	
		0.55	0.83~0.85							
		0.6	0.37							
		1	0.34					AQY212GS		
		1.1	0.34							
		1.25	0.2					AQY212G2S		
		2	0.11							
		2.5	0.08							
		2.7	0.066							
		3	0.11							
		3.3	0.033							AQV252G3S
		3.5	0.033							
		3.6	0.033							
	4	0.05								
	6	0.015								
	10	0.008								
	80	0.12	10.5				AQY225R2VY			
		0.15	10.5					AQY225R2S		
		0.35	0.8					AQY225R1S		
		1.25	0.09						AQV255GS	
	100	0.12	8.8~9	AQY2C5R3PX	AQY225R3TY		AQY225R3VY			
0.25		2.3					AQY215S			
0.3		2.3						AQV215S		
0.32		2.3								
0.35		1.8								
1.3		0.23								
1.8		0.18								
2		0.23								
2.2		0.07						AQV255G3S		
2.3		0.09								
2.4	0.07									
2.6	0.081									
4	0.035									

\* DC load type

Output configuration	Load voltage (V)	Continuous load current (A)	On resistance Typ. (Ω)	Package						
				SOP16	DIP4	DIP6	DIP8	PowerDIP4	SIL4	
1 Form A	20	0.18	2.8							
	25	0.15	5.5							
	30	0.75	0.2							
		0.8	0.18							
		1	0.18							
		1	0.25		AQY211EH					
		3.5	0.035			AQV251G				
	40	0.1	10.5							
		0.12	9.5							
		0.25	0.75~0.8							
		0.3	0.8							
		0.5	0.55							
		0.5	0.6			AQV251 AQV201				
		0.7	0.3			AQV101 <sup>**</sup>				
	50	1.6	0.1							
		3	0.04							
	60	0.3	0.9							
		0.4	0.74~0.8			AQV252 AQV202				
		0.5	0.55			AQV112KL <sup>*</sup>				
		0.5	0.8~0.85							
		0.55	0.83~0.85		AQY212EH	AQV212				
		0.6	0.37			AQV102 <sup>**</sup>				
		1	0.34							
		1.1	0.34		AQY212GH					
		1.25	0.2							
		2	0.11					AQY272		
		2.5	0.08			AQV252G				
		2.7	0.066						AQZ202D	
		3	0.11						AQZ202	
		3.3	0.033							
		3.5	0.033			AQV252G3				
	3.6	0.033						AQZ102D <sup>**</sup>		
	4	0.05						AQZ102 <sup>**</sup>		
	80	6	0.015						AQZ202G	
		10	0.008						AQZ192 <sup>**</sup>	
		0.12	10.5							
			10.5							
			0.8							
			0.09							
		100	0.12	8.8~9						
0.25			2.3							
0.3			2.3							
0.32			2.3			AQV215				
0.35			1.8			AQV255				
1.3			0.23					AQY275		
1.8			0.18						AQZ205D	
2	0.23							AQZ205		
2.2	0.07									
2.3	0.09							AQZ105D <sup>**</sup>		
2.4	0.07			AQV255G3						
2.6	0.081						AQZ105 <sup>**</sup>			
4	0.035						AQZ205G			

# PhotoMOS<sup>®</sup> Quick Reference

Output configuration	Load voltage (V)	Continuous load current (A)	On resistance Typ. (Ω)	Package								
				TSON	VSSOP	SON	SSOP	SOP4	SOP6	SOP8		
1 Form A	200	0.05	30							AQV227NS		
		0.07	30									
		0.16	11								AQV217S	
		0.18	11									
		0.25	2.6									
		0.4	1.8							AQY217GS		
		0.65	0.7									
		0.9	0.64									
		1	0.7									
		1.1	0.33									
		1.3	0.34									
	2	0.18										
	5	0.031										
	250	0.2	5.5									
		0.3	2.7									
	350	0.12	17~20						AQY210S AQY210LS AQY230S			
		0.12	23~23.5						AQY210KS	AQV210S		
		0.13	18~23									
	400	0.04	70								AQV224NS	
		0.05	70									
		0.1	25~30						AQY214S AQY234S	AQV214S		
		0.12	26~30									
		0.15	12.4									
		0.18	6.3									
		0.35	2.1									
		0.45	2.4									
		0.5	2.1									
		0.6	1.23									
	600	0.7	1.06									
		0.04	70								AQV216S	
		0.05	52									
		0.05	70									
		0.13	20									
	1	0.52										
	1000	0.03	85									
	1200	0.75	1									
1500	0.02	315~345										

\* DC load type



Output configuration	Load voltage (V)	Continuous load current (A)	On resistance Typ. (Ω)	Package					
				SOP16	DIP4	DIP6	DIP8	PowerDIP4	SIL4
1 Form A	200	0.05	30						
		0.07	30			AQV227N			
		0.16	11						
		0.18	11			AQV217			
		0.25	2.6			AQV257			
		0.4	1.8						
		0.65	0.7					AQY277	
		0.9	0.64						AQZ207D
		1	0.7						AQZ207
		1.1	0.33						AQZ107D <sup>**</sup>
		1.3	0.34						AQZ107 <sup>**</sup>
	2	0.18						AQZ207G	
	5	0.031						AQZ197 <sup>**</sup>	
	250	0.2	5.5			AQV253 AQV253H AQV203			
		0.3	2.7			AQV103 <sup>**</sup>			
	350	0.12	17~20		AQY210HL				
		0.12	23~23.5						
		0.13	18~23		AQY210EH	AQV210 AQV210EH			
	400	0.04	70						
		0.05	70			AQV224N			
		0.1	25~30						
		0.12	26~30		AQY214EH	AQV214 AQV214EH AQV214H AQV234			
		0.15	12.4			AQV204 AQV254 AQV254H			
		0.18	6.3			AQV104 <sup>**</sup>			
		0.35	2.1					AQY274	
		0.45	2.4						AQZ204D
		0.5	2.1						AQZ204
		0.6	1.23						AQZ104D <sup>**</sup>
	0.7	1.06						AQZ104 <sup>**</sup>	
	600	0.04	70						
		0.05	52		AQY216EH				
		0.05	70			AQV216			
		0.13	20			AQV256H			
		1	0.52						AQZ206G2
	1000	0.03	85			AQV259			
	1200	0.75	1			AQV209G			
	1500	0.02	315~345			AQV258 AQV258H5			

# PhotoMOS<sup>®</sup> Quick Reference

Output configuration	Load voltage (V)	Continuous load current (A)	On resistance Typ. (Ω)	Package								
				TSON	VSSOP	SON	SSOP	SOP4	SOP6	SOP8		
2 Form A	60	0.4	0.83								AQW212S	
		0.5	0.83									
	100	0.3	2.3									
	200	0.04	30									AQW227NS
		0.05	30									
		0.16	11									
	250	0.14	11								AQW223R2S	
	350	0.1	16									AQW210S
		0.12	18~23									
	400	0.04	70									
		0.08	30									AQW214S
		0.1	26~30									
		0.12	10.2									
	600	0.04	52									
0.04		70										
4 Form A	40	0.06	9.5									
		0.16	0.8									
	80	0.07	10.5									
1 Form B	60	0.15	4	AQY4C2PX								
		0.5	1					AQY412S				
		0.55	1									
	250	0.2	5.5									
	350	0.12	18						AQY410S			
		0.13	18									
	400	0.1	26						AQY414S	AQV414S		
		0.12	25.2~26									
0.15		10.5										
0.5		2.8										
2 Form B	400	0.08	26								AQW414S	
		0.1	26									
		0.12	11									
1 Form A & 1 Form B	60	0.45	1								AQW612S	
		0.5	1									
	350	0.1	18								AQW610S	
		0.12	18									
	400	0.1	26~27									
		0.12	11									

\* DC load type

Output configuration	Load voltage (V)	Continuous load current (A)	On resistance Typ. ( $\Omega$ )	Package					
				SOP16	DIP4	DIP6	DIP8	PowerDIP4	SIL4
2 Form A	60	0.4	0.83						
		0.5	0.83				AQW212 AQW212EH		
	100	0.3	2.3				AQW215		
	200	0.04	30						
		0.05	30					AQW227N	
		0.16	11					AQW217	
	250	0.14	11						
	350	0.1	16						
		0.12	18~23					AQW210 AQW210EH	
	400	0.04	70					AQW224N	
		0.08	30						
		0.1	26~30					AQW214 AQW214EH	
	600	0.12	10.2					AQW254	
		0.04	52					AQW216EH	
		0.04	70				AQW216		
	4 Form A	40	0.06	9.5	AQS221N2S				
0.16			0.8	AQS221R2S					
	80	0.07	10.5	AQS225R2S					
1 Form B	60	0.15	4						
		0.5	1						
		0.55	1		AQY412EH	AQV412EH			
	250	0.2	5.5				AQV453		
	350	0.12	18						
		0.13	18		AQY410EH	AQV410EH			
	400	0.1	26						
		0.12	25.2~26		AQY414EH	AQV414 AQV414EH			
0.15		10.5				AQV454 AQV454H			
		0.5	2.8					AQZ404	
2 Form B	400	0.08	26						
		0.1	26				AQW414 AQW414EH		
		0.12	11				AQW454		
1 Form A & 1 Form B	60	0.45	1						
		0.5	1				AQW612EH		
	350	0.1	18						
		0.12	18				AQW610EH		
	400	0.1	26~27					AQW614 AQW614EH	
0.12		11					AQW654		

## Channel configuration

- S** : 4 channels (16-pin)
- V** : 1 channels (6-pin)
- W** : 4 channels (8-pin)
- Y** : 1 channels (4-pin)
- Z** : 1 channels (SIL4-pin)

## Output configuration

- 1** : 1 Form A (DC)
  - 2** : 1 Form A (AC/DC)
  - 4** : 1 Form B (AC/DC)
  - 5** : 2 Form B (AC/DC)
  - 6** : 1a1b (AC/DC)
- A = Normally open B = Normally closed

## Type

- 0** : HF type Low on-resistance  
Power type Slim and power
- 1** : GU type Wide variation  
GE type General use and Economical
- 2** : RF type Low on-resistance and low output capacitance
- 3** : HS type High sensitivity
- 5** : HE type Low on-resistance & Economical
- 7** : PD type Flat and power
- 9** : Power High Capacity type Slim and power
- C** : CC type Capacitor coupled isolation type

## Load voltage

- 0** : 350 V
- 1** : ~ 40 V
- 2** : 50 ~ 60 V
- 3** : 250 V
- 4** : 400 V
- 5** : 80 ~ 100 V
- 6** : 600 V
- 7** : 200 V
- 8** : 1500 V
- 9** : 1000 V

**AQ Y 2 2 1 D E H L V Y**

## Driving method

- Nil** : Current-sensitive CC type
- D** : Power type voltage-sensitive

## Feature

- Nil** : Standard
- E** : Economical
- G/G\*** : High capacity
- N** : Low on-resistance
- N\*** : Low CXR ( Low Cout type )
- R\*** : Low CXR ( Low Ron type )

## I/O isolation voltage

- Nil** : Standard
- H/H\*** : High insulation ( DIP: 5,000 V )

A number is entered in the "\*" part.  
Valid only for combinations of products listed in the catalog ( see "TYPES" in this catalog ).  
Please contact our sales representative regarding combinations with products not listed in this catalog.

## Current limit function

- Nil** : Non
- K** : With short circuit protection ( Latching )
- KL** : With short circuit protection ( Non-latching )
- L** : With current limiting

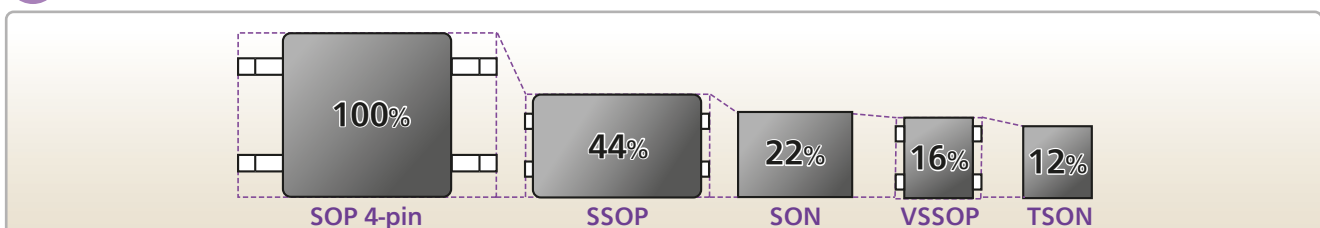
## Package

- Nil** : DIP ( Through hole terminal )
- A** : DIP ( Surface mount terminal )
- M** : SON
- S** : SOP
- T** : VSSOP
- V** : SSOP
- P** : TSON

## Packing style

- Nil** : Tube ( DIP/SOP/SIL )
- X** : Tape and reel ( DIP/SOP: 1000 pcs., TSON: 3500 pcs. )
- 1X** : Tape and reel ( TSON: 1000 pcs. )
- Y** : Tape and reel ( VSSOP: 1000 pcs., SSOP/SON: 3500 pcs. )
- 1Y** : Tape and reel ( SSOP/SON: 1000 pcs. )



## ! Package size ( Comparison with SOP 4-pin )



# PhotoMOS<sup>®</sup> Selector Chart

**GU** General use & wide variation



**GU** **GE** **CC** **RF** **HE** **HF** **HS** **PD** **Power**

Product name		GU SOP										
Contact configuration		1 Form A				1 Form A						
Number of terminals		4pin				6pin						
Appearance configuration *Standoff height included  mm												
Features		Miniature SOP4-pin type of 60V/100V/350V/400V load voltage				Miniature SOP6-pin type of 60 to 600V load voltage						
Part No.		<b>AQY212S</b>	<b>AQY215S</b>	<b>AQY210S</b>	<b>AQY214S</b>	<b>AQV212S</b>	<b>AQV215S</b>	<b>AQV217S</b>	<b>AQV210S</b>	<b>AQV214S</b>	<b>AQV216S</b>	
Output	Load voltage	AC/DC				AC/DC						
		Peak AC	60V	100V	350V	400V	60V	100V	200V	350V	400V	600V
		DC	60V	100V	350V	400V	60V	100V	200V	350V	400V	600V
	Continuous load current	1A										
	0.5A	0.5A	0.25A	0.12A	0.1A	0.5A	0.3A	0.16A	0.12A	0.1A	0.04A	
	Peak load current	1.5A	0.75A	0.3A	0.24A	1.5A	0.9A	0.48A	0.3A	0.3A	0.12A	
	Power dissipation	300mW				450mW						
	On resistance	Typ.	0.83Ω	2.3Ω	17Ω	25Ω	0.83Ω	2.3Ω	11Ω	23Ω	30Ω	70Ω
		Max.	2.5 Ω	4.0Ω	25Ω	35Ω	2.5 Ω	4.0Ω	15Ω	35Ω	50Ω	120Ω
	Output capacitance (Typ.)		80pF	140pF	45pF		80pF	110pF	70pF	45pF		
Off state leakage current (Max.)		1μA				1μA						
Input	LED forward current	50mA				50mA						
	LED reverse voltage	5V				5V						
	Peak forward current	1A				1A						
	Power dissipation	75mW				75mW						
	LED operate current	Typ.	0.9 mA				0.7 mA					
		Max.	3 mA				3 mA					
	LED turn off current	Min.	0.4 mA				0.4 mA					
		Typ.	0.85mA				0.65mA					
LED dropout voltage	Typ.	1.25V (1.14V at I <sub>F</sub> = 5mA)				1.25V (1.14V at I <sub>F</sub> = 5mA)						
	Max.	1.5V				1.5V						
Turn on time	Typ.	0.65ms	0.6 ms	0.23ms	0.21ms	0.65ms	0.60ms	0.25ms	0.25ms	0.28ms		
	Max.	2 ms	2 ms	0.5 ms	0.5 ms	2 ms	2 ms	1 ms	0.5 ms	0.5 ms		
Turn off time	Typ.	0.08ms		0.04ms		0.08ms	0.06ms	0.05ms		0.04ms		
	Max.	0.2 ms		0.2 ms		0.2 ms	0.2 ms	0.2 ms		0.2 ms		
Total power dissipation		350mW				500mW						
I/O isolation voltage		1,500Vrms				1,500Vrms						
I/O capacitance	Typ.	0.8pF				0.8pF						
	Max.	1.5pF				1.5pF						
Initial I/O isolation resistance (Min.)		1,000MΩ				1,000MΩ						
Safety standards		UL, VDE				UL						
Mass (weight) (approx.)		0.084g				0.125g						

# PhotoMOS® Selector Chart

**GU** General use & wide variation

**GU** **GE** **CC** **RF** **HE** **HF** **HS** **PD** **Power**

Product name		GU SOP High Capacity				GU High Capacity	
Contact configuration		1 Form A				1 Form A	
Number of terminals		4pin				4pin	
Appearance configuration <small>*Standoff height included</small>							
Features		Miniature SOP4-pin type with high capacity up to Max. 1.6A in the series				4-pin high capacity of 1.1A, I/O isolation voltage of 5,000V rms	
Part No.		<b>AQY211G2S</b>	<b>AQY212G2S</b>	<b>AQY212GS</b>	<b>AQY217GS</b>	<b>AQY212GH</b>	
Output	Load voltage	AC/DC					
		Peak AC	40V	60V	200V	60V	
		DC	40V	60V	200V	60V	
	Continuous load current	1.5A	1.6A	1.25A	1A	0.4A	1.1A
	Peak load current	4.0A		3.0A		1.2A	3.0A
	Power dissipation	400mW				500mW	
	On resistance	Typ.	0.1 Ω	0.2Ω	0.34Ω	1.8Ω	0.34Ω
		Max.	0.15Ω	0.5Ω	0.7 Ω	2.5Ω	0.7 Ω
	Output capacitance (Typ.)	180pF		150pF	220pF	85pF	220pF
	Off state leakage current (Max.)	1μA				1μA	
Input	LED forward current	50mA				50mA	
	LED reverse voltage	5V				5V	
	Peak forward current	1A				1A	
	Power dissipation	75mW				75mW	
	LED operate current	Typ.	0.9mA	1.1mA	0.75mA	1.1mA	
		Max.	3 mA	3 mA	3 mA	3 mA	
	LED turn off current	Min.	0.2mA	0.3mA	0.2 mA	0.3mA	
		Typ.	0.8mA	1 mA	0.7 mA	1 mA	
LED dropout voltage	Typ.	1.32V (1.14V at I <sub>F</sub> = 5mA)				1.32V (1.14V at I <sub>F</sub> = 5mA)	
	Max.	1.5V				1.5V	
Turn on time	Typ.	1 ms	1.3ms	1.2 ms	1.3ms		
	Max.	3 ms	5 ms	5 ms	5 ms		
Turn off time	Typ.	0.12ms	0.1ms	0.03ms	0.1ms		
	Max.	0.5 ms	0.5ms	0.2 ms	0.5ms		
Total power dissipation	450mW				550mW		
I/O isolation voltage	1,500Vrms				5,000Vrms		
I/O capacitance	Typ.	0.8pF				0.8pF	
	Max.	1.5pF				1.5pF	
Initial I/O isolation resistance (Min.)	1,000MΩ				1,000MΩ		
Safety standards	UL, VDE				UL, VDE		
Mass (weight) (approx.)	0.084g				0.19g		

**GU** General use & wide variation



**GU** **GE** **CC** **RF** **HE** **HF** **HS** **PD** **Power**

Product name		GU							
Contact configuration		1 Form A							
Number of terminals		6pin							
Appearance configuration <small>*Standoff height included</small>									
Features		6-pin type for switching low-level analog signal							
Part No.		<b>AQV212</b>	<b>AQV215</b>	<b>AQV217</b>	<b>AQV210</b>	<b>AQV214</b>	<b>AQV216</b>	<b>AQV214H</b>	
Output	Load voltage	AC/DC							
		Peak AC	60V	100V	200V	350V	400V	600V	400V
		DC	60V	100V	200V	350V	400V	600V	400V
	Continuous load current <small>*6-pin type: in case of A connection</small>	1A	0.55A	0.32A	0.18A	0.13A	0.12A	0.05A	0.12A
	Peak load current	1.5A	0.96A	0.54A	0.4A	0.3A	0.15A	0.3A	
	Power dissipation	500mW							
	On resistance <small>*6-pin type: in case of A connection</small>	Typ.	0.83Ω	2.3Ω	11Ω	23Ω	30Ω	70Ω	30Ω
		Max.	2.5 Ω	4 Ω	15Ω	35Ω	50Ω	120Ω	50Ω
	Output capacitance (Typ.)	80pF	110pF	70pF	45pF				
	Off state leakage current (Max.)	1μA							
Input	LED forward current	50mA							
	LED reverse voltage	5V							
	Peak forward current	1A							
	Power dissipation	75mW							
	LED operate current	Typ.	1 mA						1.3mA
		Max.	3 mA						3 mA
	LED turn off current	Min.	0.4 mA						0.4mA
		Typ.	0.79mA						1.2mA
LED dropout voltage	Typ.	1.25V (1.14V at I <sub>F</sub> = 5mA)							
	Max.	1.5V							
Turn on time	Typ.	0.65ms	0.60ms	0.25ms	0.25ms	0.21ms	0.28ms	0.6 ms	
	Max.	2 ms	2 ms	1 ms	0.5 ms	0.5 ms	0.5 ms	0.8 ms	
Turn off time	Typ.	0.08ms	0.06ms	0.05ms	0.05ms	0.05ms	0.04ms	0.05ms	
	Max.	0.2 ms	0.2 ms	0.2 ms	0.2 ms	0.2 ms	0.2 ms	0.2 ms	
Total power dissipation	550mW								
I/O isolation voltage	1,500Vrms						5,000Vrms		
I/O capacitance	Typ.	0.8pF							
	Max.	1.5pF							
Initial I/O isolation resistance (Min.)	1,000MΩ								
Safety standards	UL						UL, VDE		
Mass (weight) (approx.)	0.453g								

# PhotoMOS® Selector Chart

**GU** General use & wide variation




**GU** GE CC RF HE HF HS PD Power

Product name		GU SOP			GU						
Contact configuration		2 Form A			2 Form A						
Number of terminals		8pin			8pin						
Appearance configuration <small>*Standoff height included</small>											
Features		Miniature SOP8-pin type of 60V/350V/400V load voltage			Compact DIP8-pin type of 60V to 600V load voltage						
Part No.		<b>AQW212S</b>	<b>AQW210S</b>	<b>AQW214S</b>	<b>AQW212</b>	<b>AQW215</b>	<b>AQW217</b>	<b>AQW210</b>	<b>AQW214</b>	<b>AQW216</b>	
Output	Load voltage	AC/DC			AC/DC						
		Peak AC	60V	350V	400V	60V	100V	200V	350V	400V	600V
	DC	60V	350V	400V	60V	100V	200V	350V	400V	600V	
	Continuous load current	1A									
		0.5A	0.4A	0.1A	0.08A	0.5A	0.3A	0.16A	0.12A	0.1A	0.04A
	Peak load current	1.5A	0.3A	0.24A	1.5A	0.9A	0.48A	0.36A	0.3A	0.12A	
	Power dissipation	600mW			800mW						
	On resistance	Typ.	0.83Ω	16Ω	30Ω	0.83Ω	2.3Ω	11Ω	23Ω	30Ω	70Ω
		Max.	2.5 Ω	35Ω	50Ω	2.5 Ω	4 Ω	15Ω	35Ω	50Ω	120Ω
	Output capacitance (Typ.)	80pF	45pF		80pF	110pF	70pF	45pF			
Off state leakage current (Max.)	1μA			1μA							
Input	LED forward current	50mA			50mA						
	LED reverse voltage	5V			5V						
	Peak forward current	1A			1A						
	Power dissipation	75mW			75mW						
	LED operate current	Typ.	0.9mA			0.9mA					
		Max.	3 mA			3 mA					
	LED turn off current	Min.	0.4mA			0.4mA					
		Typ.	0.8mA			0.8mA					
LED dropout voltage	Typ.	1.25V (1.14V at I <sub>F</sub> = 5mA)			1.25V (1.14V at I <sub>F</sub> = 5mA)						
	Max.	1.5V			1.5V						
Turn on time	Typ.	0.65ms	0.23ms	0.21ms	0.65ms	0.60ms	0.25ms	0.25ms	0.31ms	0.28ms	
	Max.	2 ms	0.5 ms	0.5 ms	2 ms	2 ms	1.0 ms	0.5 ms	0.5 ms	0.5 ms	
Turn off time	Typ.	0.08ms	0.04ms		0.08ms	0.06ms	0.05ms			0.04ms	
	Max.	0.2 ms	0.2 ms		0.2 ms	0.2 ms	0.2 ms			0.2 ms	
Total power dissipation	650mW			850mW							
I/O isolation voltage	1,500Vrms			1,500Vrms							
I/O capacitance	Typ.	0.8pF			0.8pF						
	Max.	1.5pF			1.5pF						
Initial I/O isolation resistance (Min.)	1,000MΩ			1,000MΩ							
Safety standards	UL, VDE			UL							
Mass (weight) (approx.)	0.195g			0.5g							



**GU** General use & wide variation




**GU** **GE** **CC** **RF** **HE** **HF** **HS** **PD** **Power**

Product name		GU SOP			GU		
Contact configuration		1 Form B			1 Form B		
Number of terminals		4pin			6pin		
Appearance configuration <small>*Standoff height included</small>							
mm							
Features		Normally closed SOP4-pin type of 60V/350V/400V load voltage			Normally closed SOP6-pin type of 400V load voltage		
Part No.		<b>AQY412S</b>	<b>AQY410S</b>	<b>AQY414S</b>	<b>AQV414S</b>	<b>AQV414</b>	
Output	Load voltage	AC/DC					
		Peak AC	60V	350V	400V	400V	400V
	DC	60V	350V	400V	400V	400V	
	Continuous load current <small>*6-pin type: in case of A connection</small>	1A					
		0.5A	0.5A	0.12A	0.1A	0.1A	0.12A
	Peak load current	1.5A	0.3A	0.24A	0.3A	0.3A	
	Power dissipation	300mW			450mW	500mW	
	On resistance <small>*6-pin type: in case of A connection</small>	Typ.	1Ω	18Ω	26Ω	26Ω	26Ω
		Max.	2.5Ω	25Ω	35Ω	50Ω	50Ω
	Output capacitance (Typ.)	500pF					
Off state leakage current (Max.)	1μA						
Input	LED forward current	50mA					
	LED reverse voltage	5V					
	Peak forward current	1A					
	Power dissipation	75mW					
	LED operate current	Typ.	0.9 mA			0.6 mA	1 mA
		Max.	3 mA			3 mA	3 mA
	LED turn off current	Min.	0.4 mA			0.4 mA	0.4 mA
		Typ.	0.85mA			0.55mA	0.95mA
LED dropout voltage	Typ.	1.25V (1.14V at I <sub>F</sub> = 5mA)			1.25V (1.14V at I <sub>F</sub> = 5mA)	1.25V (1.14V at I <sub>F</sub> = 5mA)	
	Max.	1.5V			1.5V	1.5V	
Turn on time	Typ.	0.9 ms	0.52ms	0.47ms	0.47ms	0.47ms	
	Max.	3 ms	1 ms	1 ms	1 ms	1 ms	
Turn off time	Typ.	0.21ms	0.23ms	0.28ms	0.28ms	0.28ms	
	Max.	1 ms	1 ms	1 ms	1 ms	1 ms	
Total power dissipation	350mW			500mW	550mW		
I/O isolation voltage	1,500Vrms						
I/O capacitance	Typ.	0.8pF			0.8pF	0.8pF	
	Max.	1.5pF			1.5pF	1.5pF	
Initial I/O isolation resistance (Min.)	1,000MΩ						
Safety standards	UL, VDE			UL	UL		
Mass (weight) (approx.)	0.084g			0.125g	0.453g		

# PhotoMOS® Selector Chart




**GU** General use & wide variation

**GU** GE CC RF HE HF HS PD Power

Product name		GU SOP	GU	GU SOP		
Contact configuration		2 Form B	2 Form B	1 Form A & 1 Form B		
Number of terminals		8pin	8pin	8pin		
Appearance configuration <small>*Standoff height included</small>						
Features		Normally closed SOP8-pin type of 400V load voltage	Normally closed DIP8-pin type of 400V load voltage	Both N.O. and N.C. contacts incorporated in a small SOP8-pin package		
Part No.		<b>AQW414S</b>	<b>AQW414</b>	<b>AQW612S</b> <b>AQW610S</b>		
Output	Load voltage	AC/DC	AC/DC	AC/DC		
		Peak AC	400V	400V	60V	350V
		DC	400V	400V	60V	350V
	Continuous load current	1A				
		0.5A			0.45A	
	Peak load current	0.08A	0.1A	1.5A	0.1A	
	Power dissipation	600mW	800mW	600mW		
	On resistance	Typ.	26Ω	26Ω	1 Ω	18Ω
		Max.	50Ω	50Ω	2.5Ω	25Ω
	Output capacitance (Typ.)	100pF	100pF	80pF (N.O.) , 500pF (N.C.)      45pF (N.O.) , 100pF (N.C.)		
	Off state leakage current (Max.)	1μA	1μA	1μA		
	Input	LED forward current	50mA	50mA	50mA	
LED reverse voltage		5V	5V	5V		
Peak forward current		1A	1A	1A		
Power dissipation		75mW	75mW	75mW		
LED operate current		Typ.	0.9mA	0.7 mA	0.9mA	
		Max.	3 mA	3 mA	3 mA	
LED turn off current		Min.	0.4mA	0.4 mA	0.4mA	
		Typ.	0.8mA	0.64mA	0.8mA	
LED dropout voltage	Typ.	1.25V (1.14V at I <sub>F</sub> = 5mA)	1.25V (1.14V at I <sub>F</sub> = 5mA)	1.25V (1.14V at I <sub>F</sub> = 5mA)		
	Max.	1.5V	1.5V	1.5V		
Turn on time	Typ.	0.43ms	0.46ms	0.65ms (N.O.) , 0.9ms (N.C.)	0.28ms (N.O.) , 0.52ms (N.C.)	
	Max.	1 ms	1 ms	3ms	1ms	
Turn off time	Typ.	0.3 ms	0.40ms	0.08ms (N.O.) , 0.2ms (N.C.)	0.04ms (N.O.) , 0.23ms (N.C.)	
	Max.	1 ms	1 ms	1ms	1ms	
Total power dissipation	650mW	850mW	650mW			
I/O isolation voltage	1,500Vrms	1,500Vrms	1,500Vrms			
I/O capacitance	Typ.	0.8pF	0.8pF	0.8pF		
	Max.	1.5pF	1.5pF	1.5pF		
Initial I/O isolation resistance (Min.)	1,000MΩ	1,000MΩ	1,000MΩ			
Safety standards	UL, VDE	UL	UL, VDE			
Mass (weight) (approx.)	0.195g	0.5g	0.195g			

**GU** General use & wide variation



**GU** **GE** **CC** **RF** **HE** **HF** **HS** **PD** **Power**

Product name		GU	GU SOP Short Circuit Protection (Latch type)	GU Short Circuit Protection (Non-latch type)	
Contact configuration		1 Form A & 1 Form B	1 Form A	1 Form A	
Number of terminals		8pin	4pin	6pin	
Appearance configuration <small>*Standoff height included</small>					
Features		Both N.O. and N.C. contacts incorporated in a DIP8-pin package	Small SOP4-pin type with short circuit protecting (Latch type)	Short circuit protection (Non-latch type) only for DC load	
Part No.		<b>AQW614</b>	<b>AQY210KS</b>	<b>AQV112KL</b>	
Output	Load voltage	AC/DC	AC/DC	DC	
		Peak AC	400V	350V	—
		DC	400V	350V	7 to 60V
	Continuous load current <small>*6-pin type: in case of A connection</small>	1A			
		0.5A			0.5A
	Peak load current	0.1A	0.12A	—	
	Power dissipation	800mW	400mW	500mW	
	On resistance <small>*6-pin type: in case of A connection</small>	Typ.	27Ω	23.5Ω	0.55Ω
		Max.	50Ω	35 Ω	2 Ω
	Output capacitance (Typ.)	45pF (N.O.) , 100pF (N.C.)		42pF	300pF
Off state leakage current (Max.)	1μA		1μA	1μA	
Input	LED forward current	50mA	50mA	50mA	
	LED reverse voltage	5V	5V	5V	
	Peak forward current	1A	1A	1A	
	Power dissipation	75mW	75mW	75mW	
	LED operate current	Typ.	0.9mA	1.1mA	0.8mA
		Max.	3 mA	3 mA	10 mA
	LED turn off current	Min.	0.4mA	0.3mA	0.3mA
		Typ.	0.8mA	1 mA	0.7mA
LED dropout voltage	Typ.	1.25V (1.14V at I <sub>F</sub> = 5mA)	1.13V (1.32V at I <sub>F</sub> = 50mA)	1.17V (1.35V at I <sub>F</sub> = 50mA)	
	Max.	1.5V	1.5V	1.5V	
Turn on time	Typ.	0.28ms (N.O.) , 0.43ms (N.C.)	0.7 ms	2.0ms	
	Max.	1ms	2.0 ms	5.0ms	
Turn off time	Typ.	0.04ms (N.O.) , 0.3ms (N.C.)	0.07ms	0.1ms	
	Max.	1ms	1 ms	1 ms	
Total power dissipation	850mW		450mW	550mW	
I/O isolation voltage	1,500Vrms		1,500Vrms	1,500Vrms	
I/O capacitance	Typ.	0.8pF	0.8pF	0.8pF	
	Max.	1.5pF	1.5pF	1.5pF	
Initial I/O isolation resistance (Min.)	1,000MΩ		1,000MΩ	1,000MΩ	
Safety standards	UL		UL, VDE	UL, VDE	
Mass (weight) (approx.)	0.5g		0.084g	0.453g	

# PhotoMOS® Selector Chart

**GU** General use & wide variation

**GU** **GE** **CC** **RF** **HE** **HF** **HS** **PD** **Power**

Product name		GU SOP Current Limiting	GU Current Limiting	
Contact configuration		1 Form A	1 Form A	
Number of terminals		4pin	4pin	
Appearance configuration *Standoff height included  mm				
Features		Miniature SOP4-pin type with current limiting	DIP4-pin type with current limiting and high insulation	
Part No.		<b>AQY210LS</b>	<b>AQY210HL</b>	
Output	Load voltage	AC/DC	AC/DC	
		Peak AC	350V	350V
		DC	350V	350V
	Continuous load current	1A		
		0.5A		
	Peak load current	0.12A	0.12A	
	Peak load current	0.18A (Output Limit Current [Typ.])	0.18A (Output Limit Current [Typ.])	
	Power dissipation	400mW	500mW	
	On resistance	Typ.	20Ω	20Ω
		Max.	25Ω	25Ω
	Output capacitance (Typ.)	45pF	45pF	
	Off state leakage current (Max.)	1μA	1μA	
Input	LED forward current	50mA	50mA	
	LED reverse voltage	5V	5V	
	Peak forward current	1A	1A	
	Power dissipation	75mW	75mW	
	LED operate current	Typ.	1.2mA	1.2mA
		Max.	3 mA	3 mA
	LED turn off current	Min.	0.4mA	0.4mA
		Typ.	1.1mA	1.1mA
LED dropout voltage	Typ.	1.25V (1.14V at I <sub>F</sub> = 5mA)	1.25V (1.14V at I <sub>F</sub> = 5mA)	
	Max.	1.5V	1.5V	
Turn on time	Typ.	0.5 ms	0.5 ms	
	Max.	2 ms	2 ms	
Turn off time	Typ.	0.08ms	0.08ms	
	Max.	1 ms	1 ms	
Total power dissipation	450mW	550mW		
I/O isolation voltage	1,500Vrms	5,000Vrms		
I/O capacitance	Typ.	0.8pF	0.8pF	
	Max.	1.5pF	1.5pF	
Initial I/O isolation resistance (Min.)	1,000MΩ	1,000MΩ		
Safety standards	UL, VDE	UL, VDE		
Mass (weight) (approx.)	0.084g	0.19g		

**GE** General use and Economical

GU **GE** CC RF HE HF HS PD Power

Product name		GE					
Contact configuration		1 Form A					
Number of terminals		4pin					
Appearance configuration <small>*Standoff height included</small>							
Features		DIP4-pin type with high insulation					
Part No.		AQY211EH	AQY212EH	AQY210EH	AQY214EH	AQY216EH	
Output	Load voltage	AC/DC					
		Peak AC	30V	60V	350V	400V	600V
		DC	30V	60V	350V	400V	600V
	Continuous load current	1A	1A	0.55A	0.13A	0.12A	0.05A
		0.5A					
	Peak load current	3A	1.5A	0.4A	0.3A	0.15A	
	Power dissipation	500mW					
	On resistance	Typ.	0.25Ω	0.85Ω	18Ω	26Ω	52Ω
		Max.	0.5 Ω	2.5 Ω	25Ω	35Ω	120Ω
	Output capacitance (Typ.)		240pF	80pF	45pF		35pF
Off state leakage current (Max.)		1μA					
Input	LED forward current	50mA					
	LED reverse voltage	5V					
	Peak forward current	1A					
	Power dissipation	75mW					
	LED operate current	Typ.	1.2mA				
		Max.	3 mA				
	LED turn off current	Min.	0.4mA				
		Typ.	1.1mA				
LED dropout voltage	Typ.	1.25V (1.14V at I <sub>f</sub> = 5mA)					
	Max.	1.5V					
Turn on time	Typ.	1.5ms	1 ms	0.5ms			
	Max.	5 ms	4 ms	2 ms			
Turn off time	Typ.	0.1ms	0.05ms	0.08ms		0.04ms	
	Max.	1 ms	1 ms	1 ms		1 ms	
Total power dissipation		550mW					
I/O isolation voltage		5,000Vrms					
I/O capacitance	Typ.	0.8pF					
	Max.	1.5pF					
Initial I/O isolation resistance (Min.)		1,000MΩ					
Safety standards		UL	UL, VDE				
Mass (weight) (approx.)		0.19g					

# PhotoMOS® Selector Chart

GE

General use and Economical

GU

GE

CC

RF

HE

HF

HS

PD

Power

Product name		GE		
Contact configuration		1 Form A		
Number of terminals		6pin		
Appearance configuration <small>*Standoff height included</small>				
Features		DIP6-pin type with high insulation		
Part No.		AQV210EH	AQV214EH	
Output	Load voltage	AC/DC		
		Peak AC	350V	400V
		DC	350V	400V
	Continuous load current <small>*6-pin type: in case of A connection</small>	1A		
		0.5A		
	Peak load current	0.13A	0.12A	
	Power dissipation	0.4A	0.3A	
	On resistance <small>*6-pin type: in case of A connection</small>	Typ.	23Ω	30Ω
		Max.	35Ω	50Ω
	Output capacitance (Typ.)	45pF		
Off state leakage current (Max.)	1μA			
Input	LED forward current	50mA		
	LED reverse voltage	5V		
	Peak forward current	1A		
	Power dissipation	75mW		
	LED operate current	Typ.	1.6mA	
		Max.	3 mA	
	LED turn off current	Min.	0.4mA	
		Typ.	1.5mA	
LED dropout voltage	Typ.	1.25V (1.14V at I <sub>F</sub> = 5mA)		
	Max.	1.5V		
Turn on time	Typ.	0.7 ms		
	Max.	2 ms		
Turn off time	Typ.	0.05ms		
	Max.	1 ms		
Total power dissipation	550mW			
I/O isolation voltage	5,000Vrms			
I/O capacitance	Typ.	0.8pF		
	Max.	1.5pF		
Initial I/O isolation resistance (Min.)	1,000MΩ			
Safety standards	UL, VDE			
Mass (weight) (approx.)	0.453g			

**GE** General use and Economical

GU **GE** CC RF HE HF HS PD Power



Product name		GE				
Contact configuration		2 Form A				
Number of terminals		8pin				
Appearance configuration <small>*Standoff height included</small>						
Features		DIP8-pin type with high insulation				
Part No.		AQW212EH	AQW210EH	AQW214EH	AQW216EH	
Output	Load voltage	AC/DC				
		Peak AC	60V	350V	400V	600V
		DC	60V	350V	400V	600V
	Continuous load current	1A				
		0.5A	0.5A	0.12A	0.1A	0.04A
	Peak load current	1.5A	0.36A	0.3A	0.12A	
	Power dissipation	800mW				
	On resistance	Typ.	0.83Ω	18Ω	26Ω	52Ω
		Max.	2.5 Ω	25Ω	35Ω	120Ω
	Output capacitance (Typ.)	80pF	45pF		35pF	
Off state leakage current (Max.)	1μA					
Input	LED forward current	50mA				
	LED reverse voltage	5V				
	Peak forward current	1A				
	Power dissipation	75mW				
	LED operate current	Typ.	1.2mA			
		Max.	3 mA			
	LED turn off current	Min.	0.4mA			
		Typ.	1.1mA			
LED dropout voltage	Typ.	1.25V (1.14V at I <sub>F</sub> = 5mA)				
	Max.	1.5V				
Turn on time	Typ.	1.0ms	0.5ms			
	Max.	4.0ms	2 ms			
Turn off time	Typ.	0.08ms			0.04ms	
	Max.	1 ms			1 ms	
Total power dissipation	850mW					
I/O isolation voltage	5,000Vrms					
I/O capacitance	Typ.	0.8pF				
	Max.	1.5pF				
Initial I/O isolation resistance (Min.)	1,000MΩ					
Safety standards	UL, VDE					
Mass (weight) (approx.)	0.4g					

# PhotoMOS® Selector Chart

GE

General use and Economical



GU GE CC RF HE HF HS PD Power

Product name		GE						
Contact configuration		1 Form B			1 Form B			
Number of terminals		4pin			6pin			
Appearance configuration <small>*Standoff height included</small>								
mm								
Features		Normally closed type with high insulation			Normally closed type with high insulation			
Part No.		AQY412EH	AQY410EH	AQY414EH	AQV412EH	AQV410EH	AQV414EH	
Output	Load voltage	AC/DC			AC/DC			
		Peak AC	60V	350V	400V	60V	350V	400V
	DC	60V	350V	400V	60V	350V	400V	
	Continuous load current <small>*6-pin type: in case of A connection</small>	1A						
		0.5A	0.55A	0.13A	0.12A	0.55A	0.13A	0.12A
	Peak load current	1.5A	0.4A	0.3A	1.5A	0.4A	0.3A	
	Power dissipation	500mW			500mW			
	On resistance	Typ.	1 Ω	18Ω	26Ω	1 Ω	18Ω	25.2Ω
		Max.	2.5Ω	25Ω	35Ω	2.5Ω	35Ω	50 Ω
	Output capacitance (Typ.)		500pF	110pF	100pF	500pF	110pF	100pF
Off state leakage current (Max.)		10μA			10μA			
Input	LED forward current	50mA			50mA			
	LED reverse voltage	5V			5V			
	Peak forward current	1A			1A			
	Power dissipation	75mW			75mW			
	LED operate current	Typ.	1.4mA			1.9mA		
		Max.	3 mA			3 mA		
	LED turn off current	Min.	0.4mA			0.4mA		
		Typ.	1.3mA			1.8mA		
LED dropout voltage	Typ.	1.25V (1.14V at I <sub>F</sub> = 5mA)			1.25V (1.14V at I <sub>F</sub> = 5mA)			
	Max.	1.5V			1.5V			
Turn on time	Typ.	3 ms	1 ms	0.8ms	3ms	1.5ms	1.3ms	
	Max.	10 ms	3 ms	3 ms	8ms	3 ms	3 ms	
Turn off time	Typ.	0.2ms	0.3ms	0.2ms	0.3ms			
	Max.	1 ms	1 ms	1 ms	1.5ms			
Total power dissipation		550mW			550mW			
I/O isolation voltage		5,000Vrms			5,000Vrms			
I/O capacitance	Typ.	0.8pF			0.8pF			
	Max.	1.5pF			1.5pF			
Initial I/O isolation resistance (Min.)		1,000MΩ			1,000MΩ			
Safety standards		UL, VDE			UL, VDE			
Mass (weight) (approx.)		0.19g			0.453g			



**GE** General use and Economical


GU **GE** CC RF HE HF HS PD Power

Product name		GE				
Contact configuration		2 Form B		1 Form A & 1 Form B		
Number of terminals		8pin		8pin		
Appearance configuration <small>*Standoff height included</small>						
Features		Normally closed type with high insulation		Both N.O. and N.C. contacts incorporated in a compact DIP8-pin high insulation		
Part No.		<b>AQW414EH</b>	<b>AQW612EH</b>	<b>AQW610EH</b>	<b>AQW614EH</b>	
Output	Load voltage	AC/DC		AC/DC		
		Peak AC	400V	60V	350V	400V
	DC	400V	60V	350V	400V	
	Continuous load current	1A				
		0.5A		0.5A		
	Peak load current	0.1A		0.12A	0.1A	
	Peak load current	0.3A	1.5A	0.36A	0.3A	
	Power dissipation	800mW		800mW		
	On resistance	Typ.	26Ω	1 Ω	18Ω	26Ω
		Max.	35Ω	2.5Ω	25Ω	35Ω
Output capacitance (Typ.)	100pF	80pF (N.O.) , 500pF (N.C.)	45pF (N.O.) , 100pF (N.C.)			
Off state leakage current (Max.)	10μA	1μA (N.O.) , 10μA (N.C.)				
Input	LED forward current	50mA		50mA		
	LED reverse voltage	5V		5V		
	Peak forward current	1A		1A		
	Power dissipation	75mW		75mW		
	LED operate current	Typ.	1.3mA		1.4mA	
		Max.	3 mA		3 mA	
	LED turn off current	Min.	0.4mA		0.4mA	
Typ.		1.2mA		1.3mA		
LED dropout voltage	Typ.	1.25V (1.14V at I <sub>F</sub> = 5mA)		1.25V (1.14V at I <sub>F</sub> = 5mA)		
	Max.	1.5V		1.5V		
Turn on time	Typ.	0.8ms	1ms (N.O.) , 3ms (N.C.)	0.5ms (N.O.) , 1ms (N.C.)	0.5ms (N.O.) , 0.8ms (N.C.)	
	Max.	3 ms	4ms (N.O.) , 10ms (N.C.)	3ms	3ms	
Turn off time	Typ.	0.2ms	0.05ms (N.O.) , 0.2ms (N.C.)	0.08ms (N.O.) , 0.3ms (N.C.)	0.08ms (N.O.) , 0.2ms (N.C.)	
	Max.	1 ms	1ms	1ms	1ms	
Total power dissipation	850mW		850mW			
I/O isolation voltage	5,000Vrms		5,000Vrms			
I/O capacitance	Typ.	0.8pF		0.8pF		
	Max.	1.5pF		1.5pF		
Initial I/O isolation resistance (Min.)	1,000MΩ		1,000MΩ			
Safety standards	UL, VDE		UL, VDE			
Mass (weight) (approx.)	0.4g		0.4g			

# PhotoMOS® Selector Chart



**CC** Capacitor Coupled isolation

GU GE **CC** RF HE HF HS PD Power

Product name		CC TSON Low C × R				
Contact configuration		1 Form A				
Number of terminals		4pin				
Appearance configuration <small>*Standoff height included</small>						
Features		Super miniature TSON package, Capacitor Coupled isolation type				
Part No.		AQY2C1R6PX	AQY2C1R2PX			
Output	Load voltage	Peak AC	AC/DC	30V	40V	
		DC		30V	40V	
	Continuous load current	1A				
		0.5A		0.75A		0.3A
	Peak load current			1.5A		0.75A
	Power dissipation			250mW		
	On resistance	Typ.		0.2Ω (VIN = 5V)		0.8Ω (VIN = 5V)
		Max.		0.4Ω (VIN = 5V)		1.5Ω (VIN = 5V)
	Output capacitance (Typ.)			40pF		14.5pF
	Off state leakage current (Max.)			10nA		
Input	Input voltage		5.5V			
	Input reverse voltage		0.2V			
	Power dissipation		1.2mW			
	Operate voltage	Typ.		1.7V		1.8V
		Max.		2.5V		2.5V
	Turn off voltage	Min.		0.5V		0.5V
Typ.			1.5V		1.4V	
Input current	Typ.		0.09mA (VIN = 5V)			
	Max.		0.2 mA (VIN = 5V)			
Turn on time	Typ.		0.12ms (VIN = 5V)		0.06ms (VIN = 5V)	
	Max.		0.5 ms (VIN = 5V)		0.5 ms (VIN = 5V)	
Turn off time	Typ.		0.1 ms (VIN = 5V)		0.06ms (VIN = 5V)	
	Max.		0.5 ms (VIN = 5V)		0.5 ms (VIN = 5V)	
Total power dissipation			250mW			
I/O isolation voltage			200Vrms			
I/O capacitance	Typ.		1.2pF			
	Max.		3 pF			
Initial I/O isolation resistance (Min.)			—			
Safety standards			—			
Mass (weight) (approx.)			0.007g			

**CC** Capacitor Coupled isolation



GU GE **CC** RF HE HF HS PD Power

Product name		CC TSON Low C × R			CC TSON	
Contact configuration		1 Form A			1 Form B	
Number of terminals		4pin			4pin	
Appearance configuration <small>*Standoff height included</small>						
Features		Super miniature TSON package, Capacitor Coupled isolation type			Normally closed, ultra-miniature TSON type using capacitive isolation technology	
Part No.		<b>AQY2C2R2PX</b>	<b>AQY2C1R3PX</b>	<b>AQY2C5R3PX</b>	<b>AQY4C2PX</b>	
Output	Load voltage	AC/DC				AC/DC
		Peak AC	60V	40V	100V	60V
		DC	60V	40V	100V	60V
	Continuous load current	1A				
		0.5A				
			0.3A	0.1A	0.12A	0.15A
	Peak load current	0.9A	0.3A	0.3A	0.4A	
	Power dissipation	250mW				250mW
	On resistance	Typ.	0.9Ω (VIN = 5V)	10.5Ω (VIN = 5V)	9Ω (VIN = 5V)	4Ω (VIN = 0V)
		Max.	1.5Ω (VIN = 5V)	15 Ω (VIN = 5V)	14Ω (VIN = 5V)	8Ω (VIN = 0V)
Output capacitance (Typ.)	27pF				70pF	
Off state leakage current (Max.)	10nA				10nA	
Input	Input voltage	5.5V				5.5V
	Input reverse voltage	0.2V				0.2V
	Power dissipation	1.2mW				1.2mW
	Operate voltage	Typ.	1.7V	2.2V	2.0V	1.6V
		Max.	2.5V	2.5V	2.5V	2.5V
	Turn off voltage	Min.	0.5V	0.5V	0.5V	0.5V
		Typ.	1.4V	1.5V	1.5V	1.4V
Input current	Typ.	0.09mA (VIN = 5V)				0.09mA (VIN = 5V)
	Max.	0.2 mA (VIN = 5V)				0.2 mA (VIN = 5V)
Turn on time	Typ.	0.08ms (VIN = 5V)	0.01ms (VIN = 5V)	0.03ms (VIN = 5V)	0.06ms (VIN = 5V)	
	Max.	0.5 ms (VIN = 5V)	0.1 ms (VIN = 5V)	0.2 ms (VIN = 5V)	0.5 ms (VIN = 5V)	
Turn off time	Typ.	0.1 ms (VIN = 5V)	0.02ms (VIN = 5V)	0.04ms (VIN = 5V)	0.5 ms (VIN = 5V)	
	Max.	0.5 ms (VIN = 5V)	0.2 ms (VIN = 5V)	0.5 ms (VIN = 5V)	1.5 ms (VIN = 5V)	
Total power dissipation	250mW				250mW	
I/O isolation voltage	200Vrms				200Vrms	
I/O capacitance	Typ.	1.2pF				1.2pF
	Max.	3 pF				3 pF
Initial I/O isolation resistance (Min.)	—				—	
Safety standards	—				—	
Mass (weight) (approx.)	0.007g				0.007g	

# PhotoMOS® Selector Chart



**RF** Low on-resistance & low output capacitance

GU GE CC **RF** HE HF HS PD Power

Product name		RF VSSOP C × R3	RF SSOP C × R3	
Contact configuration		1 Form A	1 Form A	
Number of terminals		4pin	4pin	
Appearance configuration *Standoff height included  mm				
Features		C×R3 type, VSSOP package, 20 V load voltage	C×R3 type, SSOP package, 20 V load voltage	
Part No.		<b>AQY221N5TY</b>	<b>AQY221N5VY</b>	
Output	Load voltage	AC/DC	AC/DC	
		Peak AC	20V	
		DC	20V	
	Continuous load current	1A		
		0.5A		
	Peak load current	0.18A	0.18A	
	Power dissipation	250mW	250mW	
	On resistance	Typ.	2.8Ω	2.8Ω
		Max.	4.5Ω	4.5Ω
	Output capacitance (Typ.)	1.1pF	1.1pF	
Off state leakage current (Max.)	10nA	10nA		
Input	LED forward current	50mA	50mA	
	LED reverse voltage	5V	5V	
	Peak forward current	1A	1A	
	Power dissipation	75mW	75mW	
	LED operate current	Typ.	0.7mA	0.8mA
		Max.	3 mA	3 mA
	LED turn off current	Min.	0.2mA	0.2mA
		Typ.	0.6mA	0.7mA
LED dropout voltage	Typ.	1.14V (1.35V at I <sub>F</sub> = 50mA)	1.35V (1.14V at I <sub>F</sub> = 5mA)	
	Max.	1.5V	1.5V	
Turn on time	Typ.	0.02ms	0.02ms	
	Max.	0.2 ms	0.2 ms	
Turn off time	Typ.	0.01ms	0.01ms	
	Max.	0.2 ms	0.2 ms	
Total power dissipation	300mW	300mW		
I/O isolation voltage	200Vrms	1,500Vrms		
I/O capacitance	Typ.	0.4pF	0.8pF	
	Max.	1.5pF	1.5pF	
Initial I/O isolation resistance (Min.)	—	1,000MΩ		
Safety standards	—	—		
Mass (weight) (approx.)	0.026g	0.064g		

**RF** Low on-resistance & low output capacitance




GU GE CC **RF** HE HF HS PD Power

Product name		RF VSSOP C × R5	RF VSSOP C × R10			
Contact configuration		1 Form A	1 Form A			
Number of terminals		4pin	4pin			
Appearance configuration *Standoff height included  mm						
Features		4.6 mm <sup>2</sup> mounting area C×R 10: 30 V/40 V load voltage C×R 5: 25 V load voltage				
Part No.		<b>AQY221N3TY</b>	<b>AQY221R6TY</b>	<b>AQY221R2TY</b>	<b>AQY221N2TY</b>	
Output	Load voltage	AC/DC		AC/DC		
		Peak AC	25V	30V	40V	
		DC	25V	30V	40V	
	Continuous load current	1A			0.8A	
		0.5A	0.15A		0.25A	
	Peak load current	—	1.5A	0.75A	—	
	Power dissipation	250mW	250mW			
	On resistance	Typ.	5.5Ω	0.18Ω	0.8 Ω	9.5Ω
		Max.	7.5Ω	0.35Ω	1.25Ω	12.5Ω
	Output capacitance (Typ.)		1.1pF	37.5pF	14pF	1.1pF
Off state leakage current (Max.)		10nA	10nA			
Input	LED forward current	50mA	50mA			
	LED reverse voltage	5V	5V			
	Peak forward current	1A	1A			
	Power dissipation	75mW	75mW			
	LED operate current	Typ.	0.7mA	0.5mA	0.5mA	0.7mA
		Max.	3 mA	3 mA	3 mA	3 mA
	LED turn off current	Min.	0.2mA	0.1mA	0.1mA	0.2mA
		Typ.	0.6mA	0.4mA	0.4mA	0.6mA
LED dropout voltage	Typ.	1.14V (1.35V at I <sub>F</sub> = 50mA)	1.14V (1.35V at I <sub>F</sub> = 50mA)			
	Max.	1.5 V	1.5 V			
Turn on time	Typ.	0.01ms	0.1 ms	0.1 ms	0.01ms	
	Max.	0.2 ms	0.5 ms	0.5 ms	0.2 ms	
Turn off time	Typ.	0.03ms	0.06ms	0.06ms	0.03ms	
	Max.	0.2 ms	0.2 ms	0.2 ms	0.2 ms	
Total power dissipation		300mW	300mW			
I/O isolation voltage		200Vrms	200Vrms			
I/O capacitance	Typ.	0.4pF	0.4pF			
	Max.	1.5pF	1.5pF			
Initial I/O isolation resistance (Min.)		—	—			
Safety standards		—	—			
Mass (weight) (approx.)		0.026g	0.026g			

# PhotoMOS® Selector Chart


**RF** Low on-resistance & low output capacitance

GU GE CC **RF** HE HF HS PD Power



Product name		RF SON C × R5	RF SON C × R10		RF SSOP C × R5	
Contact configuration		1 Form A	1 Form A		1 Form A	
Number of terminals		4pin	4pin		4pin	
Appearance configuration <small>*Standoff height included</small>						
mm						
Features		Micro-miniature SON package C×R10: 40V load voltage C×R5: 25V load voltage			Miniature SSOP package, 25 V load voltage	
Part No.		<b>AQY221N3MY</b>	<b>AQY221R2MY</b>	<b>AQY221N2MY</b>	<b>AQY221N3VY</b>	
Output	Load voltage	AC/DC	AC/DC		AC/DC	
		Peak AC	25V	40V	40V	25V
		DC	25V	40V	40V	25V
	Continuous load current	1A				
		0.5A				
	Peak load current	0.15A	0.25A	0.12A	0.15A	
	Peak load current	—	0.75A	—	0.4A	
	Power dissipation	250mW	250mW		250mW	
	On resistance	Typ.	5.5Ω	0.8 Ω	9.5Ω	5.5Ω
		Max.	7.5Ω	1.25Ω	12.5Ω	7.5Ω
Output capacitance (Typ.)		1.1pF	14pF	1.1pF	1pF	
Off state leakage current (Max.)		10nA	10nA		10nA	
Input	LED forward current	50mA	50mA		50mA	
	LED reverse voltage	5V	5V		5V	
	Peak forward current	1A	1A		1A	
	Power dissipation	75mW	75mW		75mW	
	LED operate current	Typ.	1 mA	0.8mA	1 mA	1 mA
		Max.	3 mA	3 mA	3 mA	3 mA
	LED turn off current	Min.	0.2mA	0.1mA	0.2mA	0.2mA
		Typ.	0.9mA	0.7mA	0.9mA	0.9mA
LED dropout voltage	Typ.	1.35V (1.14V at I <sub>F</sub> = 5mA)	1.35V (1.14V at I <sub>F</sub> = 5mA)		1.35V (1.14V at I <sub>F</sub> = 5mA)	
	Max.	1.5V	1.5V		1.5V	
Turn on time	Typ.	0.02ms	0.2 ms	0.02ms	0.02ms	
	Max.	0.2 ms	0.5 ms	0.2 ms	0.2 ms	
Turn off time	Typ.	0.02ms	0.04ms	0.02ms	0.02ms	
	Max.	0.2 ms	0.2 ms	0.2 ms	0.2 ms	
Total power dissipation		300mW	300mW		300mW	
I/O isolation voltage		200Vrms	200Vrms		1,500Vrms	
I/O capacitance	Typ.	0.8pF	0.8pF		0.8pF	
	Max.	1.5pF	1.5pF		1.5pF	
Initial I/O isolation resistance (Min.)		—	—		1,000MΩ	
Safety standards		—	—		—	
Mass (weight) (approx.)		0.024g	0.024g		0.064g	

**RF** Low on-resistance & low output capacitance

GU GE CC **RF** HE HF HS PD Power

Product name		RF SSOP C × R10				
Contact configuration		1 Form A				
Number of terminals		4pin				
Appearance configuration <small>*Standoff height included</small>						
Features		Miniature SSOP package, 30 V/40 V load voltage				
Part No.		AQY221R2VY	AQY221R4VY	AQY221N2VY	AQY221R6VY	
Output	Load voltage	AC/DC				
		Peak AC	40V	40V	40V	30V
		DC	40V	40V	40V	30V
	Continuous load current	1A				1A
		0.5A	0.25A	0.5A	0.12A	
	Peak load current	0.75A	1A	0.3A	1.5A	
	Power dissipation	250mW				
	On resistance	Typ.	0.75Ω	0.55Ω	9.5Ω	0.18Ω
		Max.	1.25Ω	1 Ω	12.5Ω	0.35Ω
	Output capacitance (Typ.)	12.5pF	24pF	1pF	37.5pF	
Off state leakage current (Max.)	10nA					
Input	LED forward current	50mA				
	LED reverse voltage	5V				
	Peak forward current	1A				
	Power dissipation	75mW				
	LED operate current	Typ.	0.9mA	1 mA	0.7mA	
		Max.	3 mA	3 mA	3 mA	
	LED turn off current	Min.	0.1mA	0.2mA	0.1mA	
		Typ.	0.8mA	0.9mA	0.6mA	
LED dropout voltage	Typ.	1.35V (1.14V at I <sub>F</sub> = 5mA)				
	Max.	1.5V				
Turn on time	Typ.	0.1ms	0.25ms	0.02ms	0.2 ms	
	Max.	0.5ms	0.75ms	0.5 ms	0.5 ms	
Turn off time	Typ.	0.08ms		0.02ms	0.07ms	
	Max.	0.2 ms		0.2 ms	0.2 ms	
Total power dissipation	300mW					
I/O isolation voltage	1,500Vrms					
I/O capacitance	Typ.	0.8pF				
	Max.	1.5pF				
Initial I/O isolation resistance (Min.)	1,000MΩ					
Safety standards	—					
Mass (weight) (approx.)	0.064g					




# PhotoMOS® Selector Chart

Product name		RF SOP C × R10		RF SOP C × R10		
Contact configuration		1 Form A		4 Form A		
Number of terminals		4pin		16pin		
Appearance configuration *Standoff height included  mm						
Features		Miniature SOP4-pin C×R10 40V load voltage		Space-saving C×R type 4 channels in a SOP16-pin package		
Part No.		<b>AQY221R2S</b>	<b>AQY221N2S</b>	<b>AQS221R2S</b>	<b>AQS221N2S</b>	
Output	Load voltage	AC/DC		AC/DC		
		Peak AC	40V	40V	40V	40V
		DC	40V	40V	40V	40V
	Continuous load current	1A				
		0.5A				
	Peak load current	0.75A	0.3A	0.2A	0.12A	
	Power dissipation	300mW		600mW		
	On resistance	Typ.	0.8 Ω	9.5Ω	0.8 Ω	9.5Ω
		Max.	1.25Ω	12.5Ω	1.25Ω	12.5Ω
	Output capacitance (Typ.)	13pF		1pF		
Off state leakage current (Max.)	10nA		10nA			
Input	LED forward current	50mA		50mA		
	LED reverse voltage	5V		5V		
	Peak forward current	1A		1A		
	Power dissipation	75mW		75mW		
	LED operate current	Typ.	0.5mA	0.9 mA	0.5mA	0.9 mA
		Max.	3 mA	3 mA	3 mA	3 mA
	LED turn off current	Min.	0.1mA	0.2 mA	0.1mA	0.1 mA
		Typ.	0.4mA	0.85mA	0.4mA	0.85mA
LED dropout voltage	Typ.	1.25V (1.14V at I <sub>F</sub> = 5mA)		1.25V (1.14V at I <sub>F</sub> = 5mA)		
	Max.	1.5V		1.5V		
Turn on time	Typ.	0.1 ms	0.03ms	0.15ms	0.03vms	
	Max.	0.5 ms	0.5 ms	0.5 ms	0.2 ms	
Turn off time	Typ.	0.06ms	0.03ms	0.06ms	0.03ms	
	Max.	0.2 ms	0.2 ms	0.2 ms	0.2 ms	
Total power dissipation	350mW		650mW			
I/O isolation voltage	500Vrms		1,500Vrms			
I/O capacitance	Typ.	0.8pF		0.8pF		
	Max.	1.5pF		1.5pF		
Initial I/O isolation resistance (Min.)	1,000MΩ		1,000MΩ			
Safety standards	UL		UL			
Mass (weight) (approx.)	0.084g		0.195g			



**RF** Low on-resistance & low output capacitance





GU GE CC **RF** HE HF HS PD Power

Product name		RF VSSOP Low C × R		RF SSOP Low C × R			RF SOP Low C × R			
Contact configuration		1 Form A		1 Form A			1 Form A			
Number of terminals		4pin		4pin			4pin			
Appearance configuration *Standoff height included  mm										
Features		Low C×R type VSSOP package 60V and 100 V load voltage		Low C×R type SSOP package 60 V, 80 V and 100 V load voltage			Miniature SOP4-pin type Low C×R 60V/80V load voltage			
Part No.		<b>AQY222R2TY</b>	<b>AQY225R3TY</b>	<b>AQY222R2VY</b>	<b>AQY225R2VY</b>	<b>AQY225R3VY</b>	<b>AQY222R1S</b>	<b>AQY225R1S</b>	<b>AQY225R2S</b>	
Output	Load voltage	AC/DC		AC/DC			AC/DC			
		Peak AC	60V	100V	60V	80V	100V	60V	80V	80V
		DC	60V	100V	60V	80V	100V	60V	80V	80V
	Continuous load current	1A								
		0.5A	0.4A	0.12A	0.4A	0.12A	0.12A	0.5A	0.35A	0.15A
	Peak load current	1.2A	0.3A	1.2A	0.3A	0.3A	1A	0.7A	0.45A	
	Power dissipation	250mW		250mW			300mW			
	On resistance	Typ.	0.8 Ω	8.8Ω	0.8 Ω	10.5Ω	8.8Ω	0.8Ω	0.8Ω	10.5Ω
		Max.	1.25Ω	14 Ω	1.25Ω	15 Ω	14 Ω	1.2Ω	1.2Ω	15 Ω
	Output capacitance (Typ.)	27pF		27pF			24.5pF			
Off state leakage current (Max.)	10nA		10nA			10nA				
Input	LED forward current	50mA		50mA			50mA			
	LED reverse voltage	5V		5V			5V			
	Peak forward current	1A		1A			1A			
	Power dissipation	75mW		75mW			75mW			
	LED operate current	Typ.	0.4 mA		0.5 mA			0.5 mA		
		Max.	3 mA		3 mA			3 mA		
	LED turn off current	Min.	0.1 mA		0.1 mA			0.1 mA		
		Typ.	0.35mA		0.45mA			0.45mA		
LED dropout voltage	Typ.	1.14V (1.35V at I <sub>F</sub> = 50mA)		1.32V (1.14V at I <sub>F</sub> = 5mA)			1.32V (1.14V at I <sub>F</sub> = 5mA)			
	Max.	1.5V		1.5V			1.5V			
Turn on time	Typ.	0.12ms	0.04ms	0.15ms	0.05ms		0.15ms	0.25ms	0.05ms	
	Max.	0.5 ms	0.5 ms	0.5 ms	0.5 ms		0.5 ms	0.75ms	0.5 ms	
Turn off time	Typ.	0.08ms	0.05ms	0.08ms	0.05ms		0.06ms	0.08ms	0.05ms	
	Max.	0.2 ms	0.2 ms	0.2 ms	0.2 ms		0.2 ms	0.2 ms	0.2 ms	
Total power dissipation	300mW		300mW			350mW				
I/O isolation voltage	200Vrms		1,500Vrms			1,500Vrms				
I/O capacitance	Typ.	0.4pF		0.8pF			0.8pF			
	Max.	1.5pF		1.5pF			1.5pF			
Initial I/O isolation resistance (Min.)	—		1,000MΩ			1,000MΩ				
Safety standards	—		—			UL				
Mass (weight) (approx.)	0.026g		0.064g			0.084g				

# PhotoMOS® Selector Chart




**RF** Low on-resistance & low output capacitance

GU GE CC **RF** HE HF HS PD Power

Product name		RF SOP Low C × R	RF SOP Low on-resistance		RF Low on-resistance		
Contact configuration		2 Form A	1 Form A		1 Form A		
Number of terminals		8pin	6pin		6pin		
Appearance configuration <small>*Standoff height included</small>							
Features		Miniature SOP8-pin type Low C×R High load voltage of 250V	Miniature SOP6-pin type Low on-resistance 200V/400V load voltage		DIP6-pin type featuring low on-resistance 200V/400V load voltage		
Part No.		<b>AQW223R2S</b>	<b>AQV227NS</b>	<b>AQV224NS</b>	<b>AQV227N</b>	<b>AQV224N</b>	
Output	Load voltage	AC/DC	AC/DC		AC/DC		
		Peak AC	250V	200V	400V	200V	400V
		DC	250V	200V	400V	200V	400V
	Continuous load current <small>*6-pin type: in case of A connection</small>	1A					
		0.5A	0.14A	0.05A	0.04A	0.07A	0.05A
	Peak load current	0.42A	0.15A	0.12A	0.21A	0.15A	
	Power dissipation	600mW	450mW		360mW		
	On resistance <small>*6-pin type: in case of A connection</small>	Typ.	11Ω	30Ω	70Ω	30Ω	70Ω
		Max.	15Ω	50Ω	100Ω	50Ω	100Ω
	Output capacitance (Typ.)	33pF	10pF		10pF		
Off state leakage current (Max.)	10nA	10nA		10nA			
Input	LED forward current	50mA	50mA		50mA		
	LED reverse voltage	5V	5V		5V		
	Peak forward current	1A	1A		1A		
	Power dissipation	75mW	75mW		75mW		
	LED operate current	Typ.	0.5 mA	0.7 mA	0.9 mA	0.9 mA	
		Max.	3 mA	3 mA	3 mA	3 mA	
	LED turn off current	Min.	0.1 mA	0.4 mA	0.4 mA	0.4 mA	
		Typ.	0.45mA	0.65mA	0.85mA	0.85mA	
LED dropout voltage	Typ.	1.32V (1.14V at I <sub>F</sub> = 5mA)	1.25V (1.14V at I <sub>F</sub> = 5mA)		1.25V (1.14V at I <sub>F</sub> = 5mA)		
	Max.	1.5V	1.5V		1.5V		
Turn on time	Typ.	0.15ms	0.12ms	0.1ms	0.2 ms		
	Max.	0.5 ms	0.5 ms	0.5ms	0.5 ms		
Turn off time	Typ.	0.05ms	0.05ms		0.08ms		
	Max.	0.2 ms	0.2 ms		0.2 ms		
Total power dissipation	650mW	500mW		410mW			
I/O isolation voltage	1,500Vrms	1,500Vrms		1,500Vrms			
I/O capacitance	Typ.	0.8pF	0.8pF		0.8pF		
	Max.	1.5pF	1.5pF		1.5pF		
Initial I/O isolation resistance (Min.)	1,000MΩ	1,000MΩ		1,000MΩ			
Safety standards	UL	UL		UL			
Mass (weight) (approx.)	0.195g	0.125g		0.453g			

**RF** Low on-resistance & low output capacitance

GU GE CC **RF** HE HF HS PD Power

Product name		RF SOP Low on-resistance	RF Low on-resistance		RF SOP Low C × R	
Contact configuration		2 Form A	2 Form A		4 Form A	
Number of terminals		8pin	8pin		16pin	
Appearance configuration <small>*Standoff height included</small>						
Features		Miniature SOP8-pin type Low on-resistance 200V load voltage	DIP8-pin type featuring low on-resistance 200V/400V load voltage		Space-saving SOP16-pin type Low on-resistance 80V load voltage	
Part No.		<b>AQW227NS</b>	<b>AQW227N</b>	<b>AQW224N</b>	<b>AQS225R2S</b>	
Output	Load voltage	AC/DC	AC/DC		AC/DC	
		Peak AC	200V	200V	400V	80V
		DC	200V	200V	400V	80V
	Continuous load current	1A				
		0.5A				
	Peak load current	0.04A	0.05A	0.04A	0.07A	
	Power dissipation	0.15A	0.15A	0.12A	0.2A	
	On resistance	Typ.	600mW	800mW		600mW
		Max.	30Ω	30Ω	70 Ω	10.5Ω
	Output capacitance (Typ.)	50Ω	50Ω	100Ω	15 Ω	
	Off state leakage current (Max.)	10pF	10nA	10nA	10nA	
	Input	LED forward current	10nA	10nA	10nA	10nA
LED reverse voltage		50mA	50mA	50mA	50mA	
Peak forward current		5V	5V	5V	5V	
Power dissipation		1A	1A	1A	1A	
LED operate current		Typ.	75mW	75mW	75mW	75mW
		Max.	0.7 mA	0.9mA	0.9 mA	0.9 mA
LED turn off current		Min.	3 mA	3 mA	3 mA	3 mA
		Typ.	0.4 mA	0.4mA	0.8mA	0.3 mA
LED dropout voltage	Typ.	0.65mA	0.8mA	0.85mA	0.85mA	
	Max.	1.25V (1.14V at I <sub>F</sub> = 5mA)	1.25V (1.14V at I <sub>F</sub> = 5mA)	1.25V (1.14V at I <sub>F</sub> = 5mA)	1.25V (1.14V at I <sub>F</sub> = 5mA)	
Turn on time	Typ.	1.5V	1.5V	1.5V	1.5V	
	Max.	0.25ms	0.2 ms	0.5 ms	0.04ms	
Turn off time	Typ.	0.5 ms	0.5 ms	0.5 ms	0.3 ms	
	Max.	0.08ms	0.08ms	0.2 ms	0.07ms	
Total power dissipation	0.2 ms	0.2 ms	0.2 ms	0.2 ms		
I/O isolation voltage	650mW	850mW	650mW	650mW		
I/O capacitance	Typ.	1,500Vrms	1,500Vrms	1,500Vrms	1,500Vrms	
	Max.	0.8pF	0.8pF	1.5pF	0.8pF	
Initial I/O isolation resistance (Min.)	1.5pF	1.5pF	1.5pF	1.5pF		
Safety standards	1,000MΩ	1,000MΩ	1,000MΩ	1,000MΩ		
Mass (weight) (approx.)	UL	UL	UL	UL		
	0.195g	0.5g	0.195g	0.195g		

# PhotoMOS® Selector Chart


**HE** Low on-resistance & Economical

GU GE CC RF **HE** HF HS PD Power

Product name		HE												
Contact configuration		1 Form A												
Number of terminals		6pin												
Appearance configuration <small>*Standoff height included</small>														
Features		DIP6-pin type with low on-resistance and high insulation												
Part No.		AQV251	AQV252	AQV255	AQV257	AQV253	AQV254	AQV259	AQV258	AQV253H	AQV254H	AQV256H		
Output	Load voltage	AC/DC												
		Peak AC	40V	60V	100V	200V	250V	400V	1,000V	1,500V	250V	400V	600V	
	DC	40V	60V	100V	200V	250V	400V	1,000V	1,500V	250V	400V	600V		
	Continuous load current <small>*6-pin type: in case of A connection</small>	1A												
		0.5A	0.5A	0.4A	0.35A	0.25A	0.2A	0.15A	0.03A	0.02A	0.2A	0.15A	0.13A	
	Peak load current	1.8A	1.5A	1.0A	0.75A	0.6A	0.5A	0.09A	0.06A	0.6A	0.5A	0.4A		
	Power dissipation	360mW												
	On resistance <small>*6-pin type: in case of A connection</small>	Typ.	0.6Ω	0.74Ω	1.8Ω	2.6Ω	5.5Ω	12.4Ω	85Ω	345Ω	5.5Ω	12.4Ω	20Ω	
		Max.	1 Ω	1.4Ω	2.5Ω	4 Ω	8 Ω	16 Ω	200Ω	500Ω	8 Ω	16 Ω	30Ω	
	Output capacitance (Typ.)	350pF			170pF			80pF		170pF		70pF		
Off state leakage current (Max.)	1μA						10μA		1μA					
Input	LED forward current	50mA												
	LED reverse voltage	5V												
	Peak forward current	1A												
	Power dissipation	75mW												
	LED operate current	Typ.	0.9mA								1.4mA			
		Max.	3 mA								3 mA			
	LED turn off current	Min.	0.4mA								0.4mA			
		Typ.	0.8mA								1.3mA			
LED dropout voltage	Typ.	1.25V (1.14V at I <sub>F</sub> = 5mA)												
	Max.	1.5V												
Turn on time	Typ.	1.7ms	1.4ms	0.9 ms	1.5ms	0.8ms		0.6 ms	0.35ms	2.4 ms	1.8 ms	1.2 ms		
	Max.	3 ms	3 ms	2 ms	3 ms	2 ms		1 ms	1 ms	4 ms	3 ms	3 ms		
Turn off time	Typ.	0.07ms		0.09ms	0.1ms	0.06ms	0.05ms	0.04ms	0.04ms	0.06ms	0.05ms	0.06ms		
	Max.	0.2 ms		0.2 ms	0.2ms	0.2 ms	0.2 ms	0.2 ms	0.2 ms	0.2 ms	0.2 ms	0.2 ms		
Total power dissipation	410mW													
I/O isolation voltage	1,500Vrms								5,000Vrms					
I/O capacitance	Typ.	1.3pF												
	Max.	3 pF												
Initial I/O isolation resistance (Min.)	1,000MΩ													
Safety standards	UL							UL, VDE						
Mass (weight) (approx.)	0.453g													

**HE** Low on-resistance & Economical

GU GE CC RF **HE** HF HS PD Power

Product name		HE SOP High Capacity				
Contact configuration		1 Form A				
Number of terminals		6pin				
Appearance configuration <small>*Standoff height included</small>						
Features		Miniature SOP6-pin type with high capacity up to Max. 3.3A in the series				
Part No.		AQV252G2S	AQV252G3S	AQV255GS	AQV255G3S	
Output	Load voltage	Peak AC	AC/DC			
		DC	50V	60V	80V	100V
	Continuous load current <small>*6-pin type: in case of A connection</small>	3A	3A	3.3A	1.25A	2.2A
		2A				
		1A				
	Peak load current	6A	10A	3A	6.6A	
	Power dissipation	450mW				
	On resistance <small>*6-pin type: in case of A connection</small>	Typ.	0.04Ω	0.033Ω	0.09Ω	0.07Ω
		Max.	0.07Ω	0.06 Ω	0.15Ω	0.12Ω
	Output capacitance (Typ.)	360pF		510pF	300pF	430pF
Off state leakage current (Max.)	1μA					
Input	LED forward current	50mA				
	LED reverse voltage	5V				
	Peak forward current	1A				
	Power dissipation	75mW				
	LED operate current	Typ.	0.6mA	0.5mA	0.5mA	0.5mA
		Max.	3 mA	3 mA	3 mA	3 mA
	LED turn off current	Min.	0.2mA	0.2mA	0.2mA	0.2mA
		Typ.	0.5mA	0.4mA	0.4mA	0.4mA
LED dropout voltage	Typ.	1.32V (1.14V at I <sub>F</sub> = 5mA)				
	Max.	1.5V				
Turn on time	Typ.	1.5 ms	1.8 ms	1.3ms	1.8 ms	
	Max.	5.0 ms	5 ms	5.0ms	5 ms	
Turn off time	Typ.	0.08ms	0.15ms	0.1ms	0.15ms	
	Max.	0.5 ms	0.5 ms	0.5ms	0.5 ms	
Total power dissipation	500mW					
I/O isolation voltage	1,500Vrms					
I/O capacitance	Typ.	0.8pF				
	Max.	1.5pF				
Initial I/O isolation resistance (Min.)	1,000MΩ					
Safety standards	UL, VDE	UL	UL, VDE	UL		
Mass (weight) (approx.)	0.125g					

# PhotoMOS® Selector Chart

**HE** Low on-resistance & Economical

GU GE CC RF **HE** HF HS PD Power

Product name		HE High Capacity				
Contact configuration		1 Form A				
Number of terminals		6pin				
Appearance configuration <small>*Standoff height included</small>						
Features		Capable of Max.3.5A high capacity load current control in the series				
Part No.		AQV251G	AQV252G	AQV252G3	AQV255G3	
Output	Load voltage	AC/DC				
		Peak AC	30V	60V	60V	100V
		DC	30V	60V	60V	100V
	Continuous load current <small>*6-pin type: in case of A connection</small>	3A	3.5A	2.5A	3.5A	2.4A
		2A				
		1A				
	Peak load current	6.0A	6.0A	10A	7.0A	
	Power dissipation	600mW				
	On resistance <small>*6-pin type: in case of A connection</small>	Typ.	0.035Ω	0.08Ω	0.033Ω	0.07Ω
		Max.	0.08 Ω	0.12Ω	0.06 Ω	0.12Ω
Output capacitance (Typ.)	330pF	240pF	510pF	430pF		
Off state leakage current (Max.)	1μA					
Input	LED forward current	50mA				
	LED reverse voltage	5V				
	Peak forward current	1A				
	Power dissipation	75mW				
	LED operate current	Typ.	0.55mA	0.5mA	0.5mA	0.5mA
		Max.	3 mA	3 mA	3 mA	3 mA
	LED turn off current	Min.	0.2mA			
		Typ.	0.45mA		0.4mA	
	LED dropout voltage	Typ.	1.32V (1.14V at I <sub>F</sub> = 5mA)			
Max.		1.5V				
Turn on time	Typ.	1.1ms		1.8ms		
	Max.	5ms				
Turn off time	Typ.	0.1ms	0.25ms	0.15ms	0.15ms	
	Max.	0.5ms	0.5 ms	0.5 ms	0.5 ms	
Total power dissipation	650mW					
I/O isolation voltage	1,500Vrms					
I/O capacitance	Typ.	0.8pF				
	Max.	1.5pF				
Initial I/O isolation resistance (Min.)	1,000MΩ					
Safety standards	UL, VDE		UL	UL		
Mass (weight) (approx.)	0.453g					

**HE** Low on-resistance & Economical




GU GE CC RF **HE** HF HS PD Power

Product name		HE							
Contact configuration		1 Form A		1 Form B					
Number of terminals		5pin		6pin					
Appearance configuration <small>*Standoff height included</small>									
Features		Ideal for industrial battery monitoring system (BMS)		Normally closed DIP6-pin type Low on-resistance with 250V/400V load voltage					
Part No.		<b>AQV258H5</b>	<b>AQV453</b>	<b>AQV454</b>	<b>AQV454H</b>				
Output	Load voltage	AC/DC		AC/DC					
		Peak AC	1500V		250V				
			1500V		250V				
	DC	1500V		250V					
		1500V		250V					
	Continuous load current <small>*6-pin type: in case of A connection</small>	1A		0.2A		0.15A			
		0.5A		0.15A		0.15A			
	Peak load current		0.06A		0.6A		0.5A		
	Power dissipation		360mW		360mW		360mW		
	On resistance <small>*6-pin type: in case of A connection</small>	Typ.		315Ω		5.5Ω		11Ω	
Max.		500Ω		8 Ω		16Ω			
Output capacitance (Typ.)		60pF		350pF		170pF			
Off state leakage current (Max.)		10μA		1μA		10μA			
Input	LED forward current		50mA		50mA		50mA		
	LED reverse voltage		5V		5V		5V		
	Peak forward current		1A		1A		1A		
	Power dissipation		75mW		75mW		75mW		
	LED operate current	Typ.		1.4mA		1 mA		0.9mA	
		Max.		3.0mA		3 mA		3 mA	
	LED turn off current	Min.		0.2mA		0.4mA		0.4mA	
		Typ.		1.3mA		0.9mA		0.8mA	
LED dropout voltage	Typ.		1.32V (1.16V at I <sub>F</sub> = 10mA)		1.25V (1.14V at I <sub>F</sub> = 5mA)		1.25V (1.14V at I <sub>F</sub> = 5mA)		
	Max.		1.5V		1.5V		1.5V		
Turn on time	Typ.		0.35ms		1.52ms		1.2 ms		
	Max.		1.0 ms		3 ms		2 ms		
Turn off time	Typ.		0.04ms		0.4 ms		0.36ms		
	Max.		0.2 ms		1 ms		1 ms		
Total power dissipation		410mW		410mW		410mW			
I/O isolation voltage		5000Vrms		1,500Vrms		5,000Vrms			
I/O capacitance	Typ.		1.3pF		1.3pF		1.3pF		
	Max.		3 pF		3 pF		3 pF		
Initial I/O isolation resistance (Min.)		1,000MΩ		1,000MΩ		1,000MΩ			
Safety standards		UL		UL		UL, VDE			
Mass (weight) (approx.)		0.45g		0.453g		0.453g			

# PhotoMOS® Selector Chart

**HE** Low on-resistance & Economical



GU GE CC RF **HE** HF HS PD Power

Product name		HE			
Contact configuration		2 Form A	2 Form B	1 Form A & 1 Form B	
Number of terminals		8pin	8pin	8pin	
Appearance configuration <small>*Standoff height included</small>					
Features		DIP8-pin type featuring low on-resistance with 400V load voltage	Normally closed (2 Form B) DIP6-pin type Low on-resistance with 400V load voltage	Both 1 Form A and 1 Form B contacts incorporated in a compact DIP8-pin with low on-resistance	
Part No.		<b>AQW254</b>	<b>AQW454</b>	<b>AQW654</b>	
Output	Load voltage	AC/DC	AC/DC	AC/DC	
		Peak AC	400V	400V	400V
		DC	400V	400V	400V
	Continuous load current	1A			
		0.5A			
			0.12A	0.12A	0.12A
	Peak load current		0.36A	0.36A	0.36A
	Power dissipation		800mW	800mW	800mW
	On resistance	Typ.	10.2Ω	11Ω	11Ω
		Max.	16 Ω	16Ω	16Ω
Output capacitance (Typ.)		170pF	170pF	170pF	
Off state leakage current (Max.)		1μA	1μA	1μA	
Input	LED forward current		50mA	50mA	50mA
	LED reverse voltage		5V	5V	5V
	Peak forward current		1A	1A	1A
	Power dissipation		75mW	75mW	75mW
	LED operate current	Typ.	0.9mA	0.9mA	0.9mA
		Max.	3 mA	3 mA	3 mA
	LED turn off current	Min.	0.4mA	0.4mA	0.4mA
		Typ.	0.8mA	0.8mA	0.8mA
LED dropout voltage	Typ.	1.25V (1.14V at I <sub>F</sub> = 5mA)	1.25V (1.14V at I <sub>F</sub> = 5mA)	1.25V (1.14V at I <sub>F</sub> = 5mA)	
	Max.	1.5V	1.5V	1.5V	
Turn on time	Typ.	0.8 ms	1.2 ms	0.8ms (N.O.) , 1.2ms (N.C.)	
	Max.	2 ms	2 ms	2ms	
Turn off time	Typ.	0.04ms	0.36ms	0.04ms (N.O.) , 0.36ms (N.C.)	
	Max.	0.2 ms	1 ms	1ms	
Total power dissipation		850mW	850mW	850mW	
I/O isolation voltage		1,500Vrms	1,500Vrms	1,500Vrms	
I/O capacitance	Typ.	0.8pF	0.8pF	0.8pF	
	Max.	1.5pF	1.5pF	1.5pF	
Initial I/O isolation resistance (Min.)		1,000MΩ	1,000MΩ	1,000MΩ	
Safety standards		UL	UL	UL	
Mass (weight) (approx.)		0.5g	0.5g	0.5g	



**HF** Low on-resistance



GU GE CC RF HE **HF** HS PD Power

Product name		HF								HF High Capacity				
Contact configuration		1 Form A								1 Form A				
Number of terminals		6pin								6pin				
Appearance configuration <small>*Standoff height included</small>														
Features		DIP6-pin type with wide variation Low on-resistance								DIP-6pin type with 1,200 V load voltage and low on resistance (Typ. 1.0Ω)				
Part No.		AQV101	AQV102	AQV103	AQV104	AQV201	AQV202	AQV203	AQV204	AQV209G				
Output	Load voltage	DC				AC/DC				AC/DC				
		Peak AC				—				40V, 60V, 250V, 400V		1,200V		
		DC				40V, 60V, 250V, 400V				40V, 60V, 250V, 400V				1,200V
	Continuous load current <small>*6-pin type: in case of A connection</small>	1A		0.7A, 0.6A, 0.3A, 0.18A				0.5A, 0.4A, 0.2A, 0.15A				0.75A		
		0.5A												
	Peak load current		1.8A, 1.5A		0.6A, 0.5A		1.8A, 1.5A		0.6A, 0.5A		2.25A			
	Power dissipation		360mW				360mW				600mW			
	On resistance <small>*6-pin type: in case of A connection</small>	Typ.		0.3Ω, 0.37Ω, 2.7Ω, 6.3Ω		0.6Ω, 0.74Ω, 5.5Ω, 12.4Ω		1 Ω, 1.4 Ω, 8 Ω, 16 Ω		1 Ω, 2 Ω				
		Max.		0.5Ω, 0.7 Ω, 4 Ω, 8 Ω		1 Ω, 1.4 Ω, 8 Ω, 16 Ω								
	Output capacitance (Typ.)		600pF		300pF		350pF		170pF		330pF			
Off state leakage current (Max.)		1μA								1μA				
Input	LED forward current		50mA								30mA			
	LED reverse voltage		10V								5V			
	Peak forward current		1A								1A			
	Power dissipation		150mW								120mW			
	LED operate current	Typ.		2.3mA				2.4mA				0.16mA		
		Max.		5 mA				5 mA				3 mA		
	LED turn off current	Min.		0.8mA								0.01mA		
		Typ.		2.2mA								0.05mA		
LED dropout voltage	Typ.		2.3V								2.95V (3.23V at I <sub>F</sub> = 30mA)			
	Max.		3 V								3.4 V			
Turn on time	Typ.		0.23ms, 0.22ms, 0.13ms, 0.09ms		0.38ms, 0.41ms, 0.21ms, 0.18ms		0.5ms		0.5ms					
	Max.		1 ms, 1 ms, 1 ms, 1 ms		1 ms, 1 ms, 1 ms, 1 ms		1 ms		1 ms					
Turn off time	Typ.		0.07ms		0.08ms		0.07ms		0.05ms					
	Max.		1 ms		1 ms		1 ms		0.5 ms					
Total power dissipation		410mW								650mW				
I/O isolation voltage		1,500Vrms								1,500Vrms				
I/O capacitance	Typ.		1.3pF								1.3pF			
	Max.		3 pF								3 pF			
Initial I/O isolation resistance (Min.)		1,000MΩ								1,000MΩ				
Safety standards		UL								UL				
Mass (weight) (approx.)		0.453g								0.47g				

# PhotoMOS® Selector Chart

**HS** High sensitivity

GU GE CC RF HE HF **HS** PD Power

Product name		HS		HS SOP				
Contact configuration		1 Form A		1 Form A				
Number of terminals		6pin		4pin				
Appearance configuration <small>*Standoff height included</small>								
Features		DIP6-pin type featuring high sensitivity		Recommended LED forward current 2 mA, High Sensitivity (Low current-consumption) Miniature SOP4-pin Type				
Part No.		<b>AQV234</b>		<b>AQY232S</b>	<b>AQY230S</b>	<b>AQY234S</b>		
Output	Load voltage	AC/DC		AC/DC				
		Peak AC	400V	60V	350V	400V		
	DC	400V	60V	350V	400V			
	Continuous load current <small>*6-pin type: in case of A connection</small>	1A						
		0.5A			0.5A			
	Peak load current	0.3A		1.5A	0.3A	0.24A		
	Power dissipation	500mW		300mW				
	On resistance <small>*6-pin type: in case of A connection</small>	Typ.	30Ω		0.85Ω	19Ω	27Ω	
		Max.	50Ω		2.5 Ω	25Ω	35Ω	
	Output capacitance (Typ.)	45pF		80pF	32pF	35pF		
Off state leakage current (Max.)	1μA		1μA					
Input	LED forward current	50mA		50mA				
	LED reverse voltage	5V		5V				
	Peak forward current	1A		1A				
	Power dissipation	75mW		75mW				
	LED operate current	Typ.	0.31mA		0.35mA			
		Max.	0.5 mA		0.5 mA			
	LED turn off current	Min.	0.1 mA		0.1 mA			
		Typ.	0.29mA		0.3 mA			
LED dropout voltage	Typ.	1.25V (1.1V at I <sub>F</sub> = 2mA)		1.25V (1.1V at I <sub>F</sub> = 2mA)				
	Max.	1.5V		1.5V				
Turn on time	Typ.	0.89ms		1.5 ms	1.2 ms	0.8 ms		
	Max.	2 ms		5 ms	5 ms	5 ms		
Turn off time	Typ.	0.22ms		0.15ms	0.1 ms	0.1 ms		
	Max.	1 ms		2 ms	2 ms	2 ms		
Total power dissipation	550mW		350mW					
I/O isolation voltage	1,500Vrms		1,500Vrms					
I/O capacitance	Typ.	0.8pF		0.8pF				
	Max.	1.5pF		1.5pF				
Initial I/O isolation resistance (Min.)	1,000MΩ		1,000MΩ					
Safety standards	UL		UL, VDE					
Mass (weight) (approx.)	0.453g		0.084g					

**PD** Flat & power


GU GE CC RF HE HF HS **PD** Power



Product name		PD				
Contact configuration		1 Form A				
Number of terminals		4pin				
Appearance configuration <small>*Standoff height included</small>						
Features		Flat Power-DIP4-pin type with high capacity up to Max. 2A in the series				
Part No.		AQY272	AQY275	AQY277	AQY274	
Output	Load voltage	AC/DC				
		Peak AC	60V	100V	200V	400V
		DC	60V	100V	200V	400V
	Continuous load current	2A	2A	1.3A	0.65A	0.35A
		1A				
		0.5A				
	Peak load current	6A	4A	2A	1A	
	Power dissipation	700mW				
	On resistance	Typ.	0.11Ω	0.23Ω	0.7Ω	2.1Ω
		Max.	0.18Ω	0.34Ω	1.1Ω	3.2Ω
Output capacitance (Typ.)	1,400pF		600pF			
Off state leakage current (Max.)	10μA					
Input	LED forward current	50mA				
	LED reverse voltage	5V				
	Peak forward current	1A				
	Power dissipation	75mW				
	LED operate current	Typ.	1 mA			
		Max.	3 mA			
	LED turn off current	Min.	0.4mA			
		Typ.	0.9mA			
LED dropout voltage	Typ.	1.25V (1.16V at I <sub>F</sub> = 10mA)				
	Max.	1.5V				
Turn on time	Typ.	2.46ms	2.4 ms	1.12ms	1.65ms	
	Max.	5 ms	5 ms	5 ms	5 ms	
Turn off time	Typ.	0.22ms	0.21ms	0.1 ms	0.08ms	
	Max.	3 ms	3 ms	3 ms	3 ms	
Total power dissipation	750mW					
I/O isolation voltage	2,500Vrms					
I/O capacitance	Typ.	0.8pF				
	Max.	1.5pF				
Initial I/O isolation resistance (Min.)	1,000MΩ					
Safety standards	UL, VDE					
Mass (weight) (approx.)	0.62g					

# PhotoMOS® Selector Chart

**Power** Slim & power

GU GE CC RF HE HF HS PD **Power**



Product name		Power								
Contact configuration		1 Form A								
Number of terminals		4pin								
Appearance configuration <small>*Standoff height included</small>										
Features		Slim type with high capacity up to 4A DC load type also available								
Part No.		AQZ102	AQZ105	AQZ107	AQZ104	AQZ202	AQZ205	AQZ207	AQZ204	
Output	Load voltage	DC				AC/DC				
		Peak AC	—				60V	100V	200V	400V
		DC	60V	100V	200V	400V	60V	100V	200V	400V
	Continuous load current	3A	4A	2.6A	1.3A	0.7A	3A	2A	1A	0.5A
		1A								
	Peak load current	9.0A	6.0A	3.0A	1.5A	9.0A	6.0A	3.0A	1.5A	
	Power dissipation	1.35W				1.6W				
	On resistance	Typ.	0.05Ω	0.081Ω	0.34Ω	1.06Ω	0.11Ω	0.23Ω	0.7Ω	2.1Ω
		Max.	0.09Ω	0.17 Ω	0.55Ω	1.6 Ω	0.18Ω	0.34Ω	1.1Ω	3.2Ω
	Output capacitance (Typ.)		1,700pF		900pF		1,400pF		600pF	
Off state leakage current (Max.)		10μA								
Input	LED forward current	50mA								
	LED reverse voltage	5V								
	Peak forward current	1A								
	Power dissipation	75mW								
	LED operate current	Typ.	1mA							
		Max.	3mA							
	LED turn off current	Min.	0.4mA							
		Typ.	0.9mA							
LED dropout voltage	Typ.	1.25V (1.16V at I <sub>F</sub> = 10mA)								
	Max.	1.5V								
Turn on time	Typ.	1.66ms	1.89ms	0.83ms	1.01ms	2.46ms	2.4ms	1.12ms	1.65ms	
	Max.	5 ms	5 ms	5 ms	5 ms	5 ms	5 ms	5 ms	5 ms	
Turn off time	Typ.	0.15ms	0.19ms	0.08ms	0.08ms	0.22ms	0.21ms	0.10ms	0.08ms	
	Max.	3 ms	3 ms	3 ms	3 ms	3 ms	3 ms	3 ms	3 ms	
Total power dissipation		1.35W				1.6W				
I/O isolation voltage		2,500Vrms								
I/O capacitance	Typ.	0.8pF								
	Max.	1.5pF								
Initial I/O isolation resistance (Min.)		1,000MΩ								
Safety standards		UL, VDE								
Mass (weight) (approx.)		1.65g								


Product name		Power	Power Voltage-sensitive				
Contact configuration		1 Form B	1 Form A				
Number of terminals		4pin	4pin				
Appearance configuration <small>*Standoff height included</small>  mm							
Features		Normally closed type in a slim SIL package Load voltage 400V	Slim and high capacity up to 3.6A Voltage-driven type				
Part No.		<b>AQZ404</b>	<b>AQZ102D</b>	<b>AQZ105D</b>	<b>AQZ107D</b>	<b>AQZ104D</b>	
Output	Load voltage	AC/DC	DC				
		Peak AC	400V	—			
		DC	400V	60V	100V	200V	400V
	Continuous load current	3A		3.6A	2.3A	1.1A	
		1A	0.5A				0.6A
	Peak load current	1.5A	9A	6A	3A	1.5A	
	Power dissipation	1.6W	1.35W				
	On resistance	Typ.	2.8Ω	0.033Ω	0.09Ω	0.33Ω	1.23Ω
		Max.	4.0Ω	0.09 Ω	0.17Ω	0.55Ω	1.6 Ω
	Output capacitance (Typ.)	2,000pF	1,700pF		900pF		
Off state leakage current (Max.)	10μA	10μA					
Input	LED forward current	50mA	Input voltage: 30V				
	LED reverse voltage	5V	Input reverse voltage: 5V				
	Peak forward current	1A	—				
	Power dissipation	75mW	300mW				
	LED operate current	Typ.	1mA	Operate voltage: 1.4V			
		Max.	3mA	Operate voltage: 4 V			
	LED turn off current	Min.	0.4mA	Turn off voltage: 0.8V			
		Typ.	0.9mA	Turn off voltage: 1.3V			
LED dropout voltage	Typ.	1.25V (1.16V at I <sub>F</sub> = 10mA)	Input current (Typ.): 6.5mA				
	Max.	1.5V					
Turn on time	Typ.	3.9ms	3.3ms	2.2ms	1.5ms	1.2ms	
	Max.	7.5ms	10 ms	10 ms	10 ms	10 ms	
Turn off time	Typ.	0.8ms	0.2ms		0.1ms		
	Max.	3 ms	3 ms		3 ms		
Total power dissipation	1.6W	1.35W					
I/O isolation voltage	2,500Vrms	2,500Vrms					
I/O capacitance	Typ.	0.8pF	0.8pF				
	Max.	1.5pF	1.5pF				
Initial I/O isolation resistance (Min.)	1,000MΩ	1,000MΩ					
Safety standards	UL, VDE	UL, VDE					
Mass (weight) (approx.)	1.65g	1.65g					

# PhotoMOS® Selector Chart





**Power** Slim & power

GU GE CC RF HE HF HS PD **Power**

Product name		Power Voltage-sensitive				Power High Capacity				
Contact configuration		1 Form A				1 Form A				
Number of terminals		4pin				4pin				
Appearance configuration *Standoff height included  mm										
Features		Slim and high capacity up to 2.7A Voltage-driven type				High capacity up to Max. 6A in the series with a slim SIL package				
Part No.		<b>AQZ202D</b>	<b>AQZ205D</b>	<b>AQZ207D</b>	<b>AQZ204D</b>	<b>AQZ202G</b>	<b>AQZ205G</b>	<b>AQZ207G</b>	<b>AQZ206G2</b>	
Output	Load voltage	AC/DC				AC/DC				
		Peak AC	60V	100V	200V	400V	60V	100V	200V	600V
		DC	60V	100V	200V	400V	60V	100V	200V	600V
	Continuous load current	6A	2.7A				6A			
		1A	1.8A				4A			
		0.5A	0.9A				2A			
			0.45A				1A			
	Peak load current		9A	6A	3A	1.5A	12A	8A	6A	3A
	Power dissipation		1.6W				1.6W			
	On resistance	Typ.	0.066Ω	0.18Ω	0.64Ω	2.4Ω	0.015Ω	0.035Ω	0.18Ω	0.52Ω
Max.		0.18 Ω	0.34Ω	1.1 Ω	3.2Ω	0.03 Ω	0.06 Ω	0.35Ω	0.8 Ω	
Output capacitance (Typ.)		1,400pF		600pF		1,600pF	1,240pF	700pF	3,000pF	
Off state leakage current (Max.)		10μA				10μA				
Input	LED forward current	Input voltage: 30V				50mA				
	LED reverse voltage	Input reverse voltage: 5V				5V				
	Peak forward current	—				1A				
	Power dissipation	300mW				75mW				
	LED operate current	Typ.	Operate voltage: 1.4V				1mA			
		Max.	Operate voltage: 4 V				3mA			
	LED turn off current	Min.	Turn off voltage: 0.8V				0.4mA			
		Typ.	Turn off voltage: 1.3V				0.9mA			
LED dropout voltage	Typ.	Input current (Typ.): 6.5mA				1.25V (1.16V at I <sub>F</sub> = 10mA)				
	Max.					1.5V				
Turn on time	Typ.	5.8ms	4.2ms	2.7ms	2.3ms	3.8ms	5.0ms	2.5ms	3.0ms	
	Max.	10 ms	10 ms	10 ms	10 ms	10 ms	10 ms	10 ms	10 ms	
Turn off time	Typ.	0.2ms		0.1ms		0.2ms	0.3ms	0.2ms	0.2ms	
	Max.	3 ms		3 ms		3 ms	3 ms	3 ms	3 ms	
Total power dissipation		1.6W				1.6W				
I/O isolation voltage		2,500Vrms				2,500Vrms				
I/O capacitance	Typ.	0.8pF				0.8pF				
	Max.	1.5pF				1.5pF				
Initial I/O isolation resistance (Min.)		1,000MΩ				1,000MΩ				
Safety standards		UL, VDE				UL, VDE				
Mass (weight) (approx.)		1.65g				1.65g				


Product name		Power DC High Capacity		
Contact configuration		1 Form A		
Number of terminals		4pin		
Appearance configuration <small>*Standoff height included</small>				
Features		High capacity up to Max. DC10A in the series with a slim SIL package		
Part No.		AQZ192	AQZ197	
Output	Load voltage	Peak AC	DC	
		DC	60V 10A	
	Continuous load current	6A	5A	
		1A		
		0.5A		
	Peak load current	30A	15A	
	Power dissipation	2W		
	On resistance	Typ.	0.008Ω	0.031Ω
		Max.	0.015Ω	0.05 Ω
	Output capacitance (Typ.)	2,100pF	2,600pF	
Off state leakage current (Max.)	10μA			
Input	LED forward current	50mA		
	LED reverse voltage	5V		
	Peak forward current	1A		
	Power dissipation	75mW		
	LED operate current	Typ.	0.7mA	
		Max.	3 mA	
	LED turn off current	Min.	0.2mA	
		Typ.	0.5mA	
LED dropout voltage	Typ.	1.35V (1.17V at I <sub>F</sub> = 10mA)		
	Max.	1.5V		
Turn on time	Typ.	1 ms	0.7 ms	
	Max.	3 ms	3 ms	
Turn off time	Typ.	0.11ms	0.05ms	
	Max.	1 ms	1 ms	
Total power dissipation	2W			
I/O isolation voltage	3,000Vrms			
I/O capacitance	Typ.	1.3pF		
	Max.	3pF		
Initial I/O isolation resistance (Min.)	1,000MΩ			
Safety standards	UL, VDE			
Mass (weight) (approx.)	4.3g			

# Photovoltaic MOSFET Drivers Selector Chart

Product name		Photovoltaic MOSFET drivers				Photovoltaic MOSFET driver high power type		
Number of terminals		DIP 6pin		SOP 4pin	SSOP 4pin		SSOP 4pin	
Appearance configuration *Standoff height included  mm								
Features		Photovoltaic MOSFET drivers of wide variation				MOSFET drivers for high-speed and low on-resistance		
Part No.		APV1122	APV1121S	APV2121S	APV2111VY	APV1111GVY	APV3111GVY	
Output	Open voltage	Min.	6 V		5 V		6 V	15 V
		Typ.	8.7V		8.2V		8.5V	18 V
	Short current	Min.	5μA		3μA		25μA	5μA
		Typ.	14μA		8μA		45μA	12μA
Input	LED forward current		50mA			30mA		
	LED reverse voltage		5V			5V		
	Peak forward current		1A			1A		
	Power dissipation		75mW			60mW		
	LED operate current	Typ.	0.6mA		0.85mA		—	
		Max.	3 mA			—		
	LED turn off current	Min.	0.2mA			—		
		Typ.	0.5mA		0.75mA		—	
LED dropout voltage	Typ.	1.15V			1.47V			
	Max.	1.5 V			1.7 V			
Turn on time		Typ.	0.4ms		0.8ms		0.1 ms	0.4 ms
Turn off time		Typ.	0.1ms			0.1 ms	0.04ms	
I/O capacitance	Typ.	0.8pF			0.8pF			
	Max.	1.5pF			1.5pF			
Initial I/O isolation resistance (Min.)		1,000MΩ			1,000MΩ			
I/O isolation voltage		5,000Vrms	2,500Vrms	2,500Vrms	1,500Vrms	1,500Vrms		
Safety standards		UL, VDE			UL	UL		
Mass (weight) (approx.)		0.45g	0.08g	0.06g		0.06g		



# PhotoIC Coupler Selector Chart

Product name		PhotoIC Coupler		
Transfer rate (Typ.)		20Mbps		50Mbps
Figure of output		Totem pole output	Open drain output	Totem pole output
Appearance configuration *Standoff height included				
Part No.		<b>APS1241S</b>	<b>APS2241S</b>	<b>APS1551S</b>
Supply voltage		Recommend: 2.7 to 5.5 V Absolute maximum rating: 6 V		Recommend: 4.5 to 5.5 V Absolute maximum rating: 6 V
Output voltage				
Output current		Max.	10 mA	25 mA
Power dissipation		Max.	40 mW	
Output	Low level supply current	Max.	3 mA	
	High level supply current	Max.	3 mA	
	Low level output voltage	Max.	0.4 V	0.6 V
	High level output voltage	Min.	4 V	-
	High level output current	Max.	-	50 $\mu$ A
	LED forward current		25 mA	
	LED reverse voltage		5 V	
	Peak forward current		1 A	
Input	Threshold input current	Max.	4 mA	
	LED dropout voltage	Min.	1.45 V	
		Typ.	1.6 V	
		Max.	1.8 V	
	Input capacitance	Typ.	20 pF	
Propagation delay time (H→L)	Max.	55 ns	60 ns	30 ns
Propagation delay time (L→H)	Max.	55 ns	60 ns	30 ns
Propagation delay skew	Max.	30 ns	40 ns	16 ns
Pulse width distortion	Max.	30 ns	35 ns	10 ns
Output fall time	Typ.	2 ns	1 ns	5 ns
Output rise time	Typ.	2 ns	18 ns	4 ns
Common mode transient immunity at low level output	Min.	20 kV/ $\mu$ s		15 kV/ $\mu$ s
Common mode transient immunity at high level output	Min.	20 kV/ $\mu$ s		15 kV/ $\mu$ s
I/O isolation voltage		3,750 Vrms		
Ambient temperature (Operating)		-40 to +105°C		
Ambient temperature (Storage)		-40 to +125°C		
I/O capacitance	Typ.	0.5 pF		
Initial I/O isolation resistance	Min.	1,000 M $\Omega$		
Safety standards		UL/C-UL		
Mass (weight) (approx.)		0.08g		

# Phototriac Coupler Selector Chart

Product name	APT Phototriac Coupler							
Type	Zero-cross	Random	Zero-cross	Random	Zero-cross	Random	Zero-cross	Random
Number of terminals	SOP 4pin		DIP 4pin		DIP 6pin		DIP 6pin wide	
Type	0.05A		0.1A					
Appearance configuration *Standoff height included  mm								
Features	Phototriac coupler ideal for triac driver with wide variation							
Part No.	APT1211S	APT1221S	APT1211	APT1221	APT1212	APT1222	APT1212W	APT1222W
Output	Repetitive peak OFF-state voltage							
	600V							
	ON-state RMS current							
	0.8A							
	0.7A							
	0.6A							
0.5A								
0.4A								
0.3A								
0.2A								
0.1A		0.05A				0.1A		
Non-repetitive surge current								
0.6A		1.2A						
Peak ON-state voltage								
Max. 2.5V								
Peak OFF-state current								
Max. 1μA								
Input	LED forward current							
	50mA							
	LED reverse voltage							
	6V							
Peak forward current								
1A								
LED dropout voltage (I <sub>F</sub> =20mA)								
Max. 1.3V								
Trigger LED current								
Max. 10mA								
Zero-cross voltage								
Max. 50V	—	Max. 50V	—	Max. 50V	—	Max. 50V	—	
Turn on time								
Max. 0.1ms								
I/O isolation voltage								
3,750Vrms		5,000Vrms						
I/O isolation resistance								
Min. 50GΩ								
Safety standards								
UL/C-UL, VDE*								
Mass (weight) (approx.)								
0.08g		0.19g		0.45g		0.45g		

\*Normal part number is taken UL/C-UL standards. About VDE standard, please contact our sales representative.

# Phototriac Coupler Selector Chart





Product name	APT Phototriac Coupler			
Type	Zero-cross (Low zero-cross type)			
Number of terminals	SOP 4pin	DIP 4pin	DIP 6pin	DIP 6pin wide
Type	0.05A	0.1A		
<b>Appearance configuration</b> *Standoff height included  mm				
Features	Phototriac coupler ideal for triac driver with wide variation			
Part No.	APT1231S	APT1231	APT1232	APT1232W
Output	Repetitive peak OFF-state voltage	600V		
	ON-state RMS current	0.05A	0.1A	
	Non-repetitive surge current	0.6A	1.2A	
	Peak ON-state voltage	Max. 2.0V		
	Peak OFF-state current	Max. 1μA		
Input	LED forward current	50mA		
	LED reverse voltage	6V		
	Peak forward current	1A		
	LED dropout voltage (I <sub>F</sub> =20mA)	Max. 1.3V		
Trigger LED current	Max. 10mA			
Zero-cross voltage	Max. 15V			
Turn on time	Max. 0.1ms			
I/O isolation voltage	3,750Vrms	5,000Vrms		
I/O isolation resistance	Min. 50GΩ			
Safety standards	UL/C-UL, VDE*			
Mass (weight) (approx.)	0.08g	0.19g	0.45g	0.45g



\*Normal part number is taken UL/C-UL standards. About VDE standard, please contact our sales representative.

# Solid State Relays Selector Chart

Product name		AQ-H Relays							
Type	Zero-cross	Random	Zero-cross	Random	Zero-cross	Random	Zero-cross	Random	
Number of terminals	DIP 8pin								
Type	0.3A		0.6A		0.9A		1.2A		
Appearance configuration *Standoff height included									
mm									
Features	Compact DIP type SSR Ideal for AC load control								
Part No.	AQH0213	AQH0223	AQH1213	AQH1223	AQH2213	AQH2223	AQH3213	AQH3223	
Output	Repetitive peak OFF-state voltage	600V							
	ON-state RMS current	0.3A		0.6A		0.9A		1.2A	
	Non-repetitive surge current	3A		6A		9A		12A	
	Peak ON-state voltage	Max. 2.5V							
	Peak OFF-state current	Max. 100µA							
	LED forward current	50mA							
Input	LED reverse voltage	6V							
	Peak forward current	1A							
	LED dropout voltage (I <sub>F</sub> =20mA)	Max. 1.3V							
	Trigger LED current	Max. 10mA							
Zero-cross voltage	Max. 50V	—	Max. 50V	—	Max. 50V	—	Max. 50V	—	
Turn on time	Max. 0.1ms								
I/O isolation voltage	5,000Vrms								
I/O capacitance, Typ.	2.1pF								
I/O isolation resistance	Min. 50GΩ								
Safety standards	UL/C-UL, VDE								
Mass (weight) (approx.)	0.56g								

# Solid State Relays Selector Chart

Product name		AQ-G Relays											
Type		Zero-cross					Random						
Number of terminals		4pin											
Type		1A			2A		1A			2A			
Appearance configuration *Standoff height included	mm												
		Slim type SSR for 1A and 2A control											
Part No.		AQG12105	AQG12112	AQG12124	AQG22105	AQG22112	AQG22124	AQG12205	AQG12212	AQG12224	AQG22205	AQG22212	AQG22224
Load side	Load voltage	AC 75 to 264Vrms											
		DC —											
	Max. load current	1A			2A		1A			2A			
	Off state leakage current, max.	1.5mA (applied 200V)											
	Non-repetitive surge current	8A			30A		8A			30A			
Input side	Control voltage	4 to 6V	9.6 to 14.4V	19.2 to 28.8V	4 to 6V	9.6 to 14.4V	19.2 to 28.8V	4 to 6V	9.6 to 14.4V	19.2 to 28.8V	4 to 6V	9.6 to 14.4V	19.2 to 28.8V
	Input impedance, approx.	0.3kΩ	0.8kΩ	1.6kΩ	0.3kΩ	0.8kΩ	1.6kΩ	0.3kΩ	0.8kΩ	1.6kΩ	0.3kΩ	0.8kΩ	1.6kΩ
	Drop-out voltage, min.	1V											
Operate time, max.		1/2 cycle of voltage sine wave + 1ms					1ms						
Release time, max.		1/2 cycle of voltage sine wave + 1ms											
Breakdown voltage		3,000Vrms											
Snubber circuit integrated		•											
LED operation indicator		—											
Safety standards		UL/C-UL, VDE											
Mass (weight) (approx.)		2.7g			4.3g		2.7g			4.3g			


Product name		AQ1 Relays		
Type		Zero-cross*		
Number of terminals		4pin		
Type		3A	10A	
Appearance configuration *Standoff height included  mm				
Features		High capacity up to 3 A/10 A PC board terminal type		
Part No.		AQ1298	AQ1208	
Load side	Load voltage	AC	75 to 250Vrms	
		DC	—	
	Max. load current	20A		
		15A		
		10A		(Heat sink/Panel heat) 10A
3A		3A		
Off state leakage current, max.	5mA			
Non-repetitive surge current	100A			
Input side	Control voltage	4 to 32V DC		
	Input impedance, approx.	—		
	Drop-out voltage, min.	1.0V		
Operate time, max.	1/2 cycle of voltage sine wave + 1ms			
Release time, max.	1/2 cycle of voltage sine wave + 1ms			
Breakdown voltage	4,000 Vrms (between input and output) 2,500Vrms (between input, output and case)			
Snubber circuit integrated	•			
LED operation indicator	—			
Safety standards	UL/C-UL, VDE			
Mass (weight) (approx.)	19g	26g		

\*Random type is also available by custom order.

# Solid State Relays Selector Chart

Product name		AQ8 Relays											
Type		Zero-cross						Random					
Number of terminals		4pin											
Type		2A			3A			2A			3A		
Appearance configuration *Standoff height included  mm													
Features		SIL type with 9 mm thickness, 3,000 V AC high dielectric voltage, controls up to 2 A/3 A											
Part No.	Input terminal distance: 5.08mm	AQ80139	AQ80133	AQ80134	AQ80159	AQ80153	AQ80154	AQ80239	AQ80233	AQ80234	AQ80259	AQ80253	AQ80254
	Input terminal distance: 7.62mm	AQ81139	AQ81133	AQ81134	AQ81159	AQ81153	AQ81154	AQ81239	AQ81233	AQ81234	AQ81259	AQ81253	AQ81254
Load side	Load voltage	AC 75 to 250Vrms DC —											
	Max. load current	2A			3A			2A			3A		
	Off state leakage current, max.	5mA											
	Non-repetitive surge current	30A			80A			30A			80A		
Input side	Control voltage	4 to 6V	9.6 to 14.4V	21.6 to 26.4V	4 to 6V	9.6 to 14.4V	21.6 to 26.4V	4 to 6V	9.6 to 14.4V	21.6 to 26.4V	4 to 6V	9.6 to 14.4V	21.6 to 26.4V
	Input impedance, approx.	0.18kΩ	0.55kΩ	1.4kΩ	0.18kΩ	0.55kΩ	1.4kΩ	0.3kΩ	0.8kΩ	1.8kΩ	0.3kΩ	0.8kΩ	1.8kΩ
	Drop-out voltage, min.	0.5V	1.2V	2.4V	0.5V	1.2V	2.4V	0.5V	1.2V	2.4V	0.5V	1.2V	2.4V
Operate time, max.	1/2 cycle of voltage sine wave + 1ms						1ms						
Release time, max.	1/2 cycle of voltage sine wave + 1ms												
Breakdown voltage	3,000Vrms												
Snubber circuit integrated	•												
LED operation indicator	—												
Safety standards	UL/C-UL, VDE*												
Mass (weight) (approx.)	6.8g			9.8g			6.8g			9.8g			



\*Normal part number is taken UL/C-UL, standards. About VDE standard, please contact our sales representative. (from April 2022)

Product name		AQ-J Relays								
Type		Zero-cross <sup>*1</sup>								
Number of terminals		4								
Type		10A		15A				25A		
Appearance configuration <small>*Standoff height included</small>								Input terminal: #110 type Output terminal: #250 type		
Features		Load current 10 to 25A Small Tab Terminal SSR								
Part No.		AQJ112V	AQJ119V	AQJ116V	AQJ212V	AQJ219V	AQJ216V	AQJ412V	AQJ419V	AQJ416V
Load side	Load voltage	AC	75 to 264Vrms							
		DC	—							
	Max. load current	40A							*4 (Heat sink) 25A	
		25A								
		20A								
15A		*2 (Heat sink/Panel heat) 10A		*3 (Heat sink/Panel heat) 15A						
10A										
5A										
2A										
1A										
Off state leakage current, max.	5mA									
Non-repetitive surge current	100A			150A			250A			
Input side	Control voltage	4 to 6V	10 to 18V	18 to 28V	4 to 6V	10 to 18V	18 to 28V	4 to 6V	10 to 18V	18 to 28V
	Input impedance, approx.	0.26kΩ	0.8kΩ	1.6kΩ	0.26kΩ	0.8kΩ	1.6kΩ	0.26kΩ	0.8kΩ	1.6kΩ
	Drop-out voltage, min.	1V								
Operate time, max.	1/2 cycle of voltage sine wave + 1ms									
Release time, max.	1/2 cycle of voltage sine wave + 1ms									
Breakdown voltage	3,000Vrms between input and output 2,500Vrms between input, output and case									
Snubber circuit integrated	•									
LED operation indicator	—									
Safety standards	UL/C-UL, VDE									
Mass (weight) (approx.)	30g									



<sup>\*1</sup> Random type is available by custom order. <sup>\*2</sup> When mounting a standard heat sink (AQP813) or when mounting on 100 × 100 × t1.6 (mm) iron plate  
<sup>\*3</sup> When mounting a standard heat sink (AQP813) or when mounting on 200 × 200 × t2 (mm) iron plate <sup>\*4</sup> When mounting a standard heat sink (AQP815)









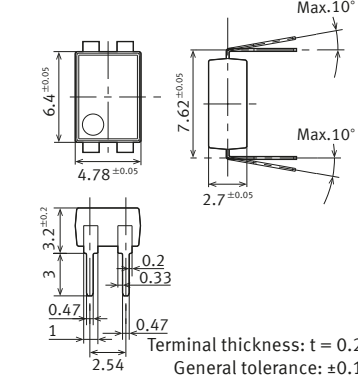
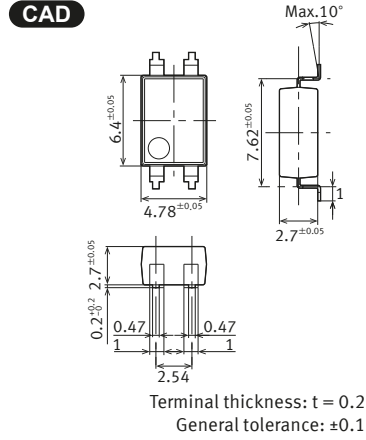






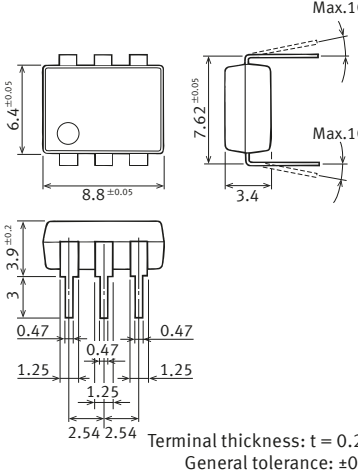
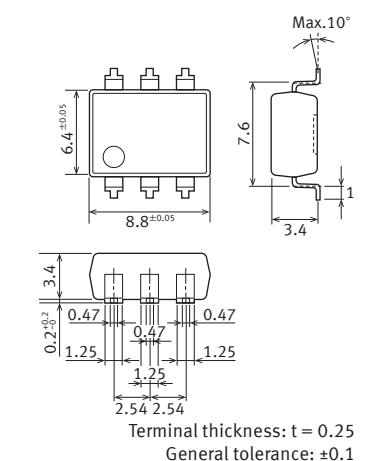






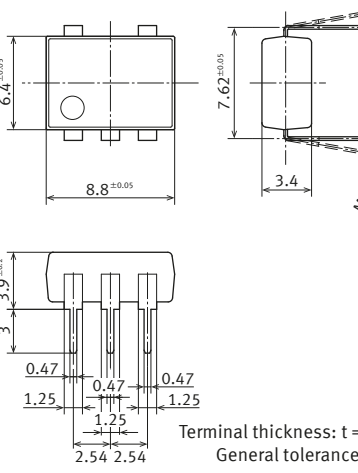
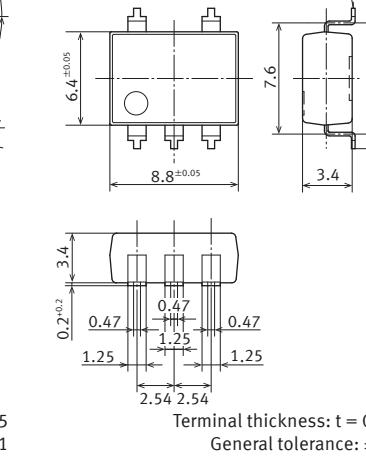
# Solid State Relays Selector Chart

Product name		AQ-J Relays											
Type		Zero-cross*											
Number of terminals		4						4×2					
Type		10A (Output arrangement: 1a)			20A (Output arrangement: 1a)			10A (Output arrangement: 1a × 2)			15A (Output arrangement: 1a × 2)		
Appearance configuration *Standoff height included  mm													
Features		Load current 10 to 25A Small Tab Terminal SSR											
Part No.		AQJ112VY	AQJ119VY	AQJ116VY	AQJ412VY	AQJ419VY	AQJ416VY	AQJ112VW	AQJ119VW	AQJ116VW	AQJ412VW	AQJ419VW	AQJ416VW
Load side	Load voltage	AC 75 to 264Vrms DC —											
	Max. load current	10A			20A			(per 1 Form A) 10A			(per 1 Form A) 15A		
	Off state leakage current, max.	5mA											
	Non-repetitive surge current	100A			250A			100A			250A		
	Control voltage	4 to 6V	10 to 18V	18 to 28V	4 to 6V	10 to 18V	18 to 28V	4 to 6V	10 to 18V	18 to 28V	4 to 6V	10 to 18V	18 to 28V
Input side	Input impedance, approx.	0.26kΩ	0.8kΩ	1.6kΩ	0.26kΩ	0.8kΩ	1.6kΩ	0.26kΩ	0.8kΩ	1.6kΩ	0.26kΩ	0.8kΩ	1.6kΩ
	Drop-out voltage, min.	1V											
Operate time, max.		1/2 cycle of voltage sine wave + 1ms											
Release time, max.		1/2 cycle of voltage sine wave + 1ms											
Breakdown voltage		3,000Vrms between input and output 2,500Vrms between input, output and case											
Snubber circuit integrated		•											
LED operation indicator		—											
Safety standards		—											
Mass (weight) (approx.)		250g						280g					


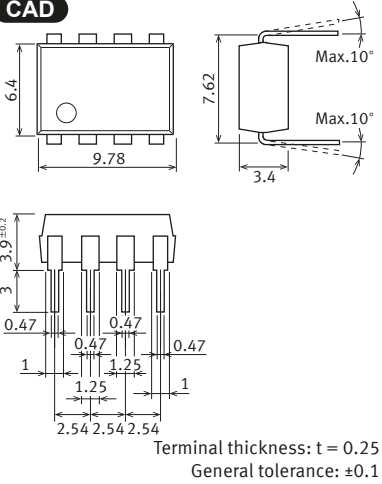

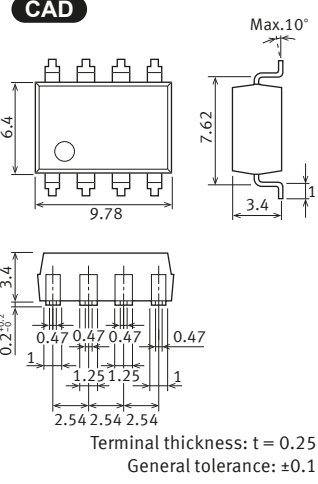



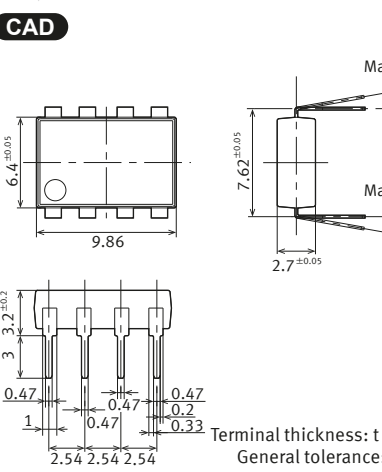

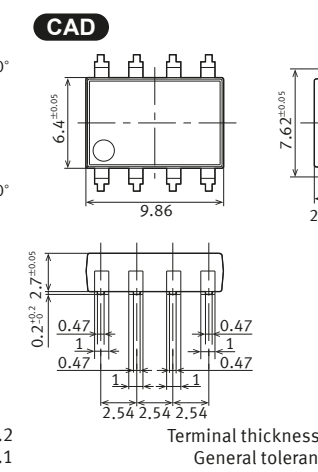



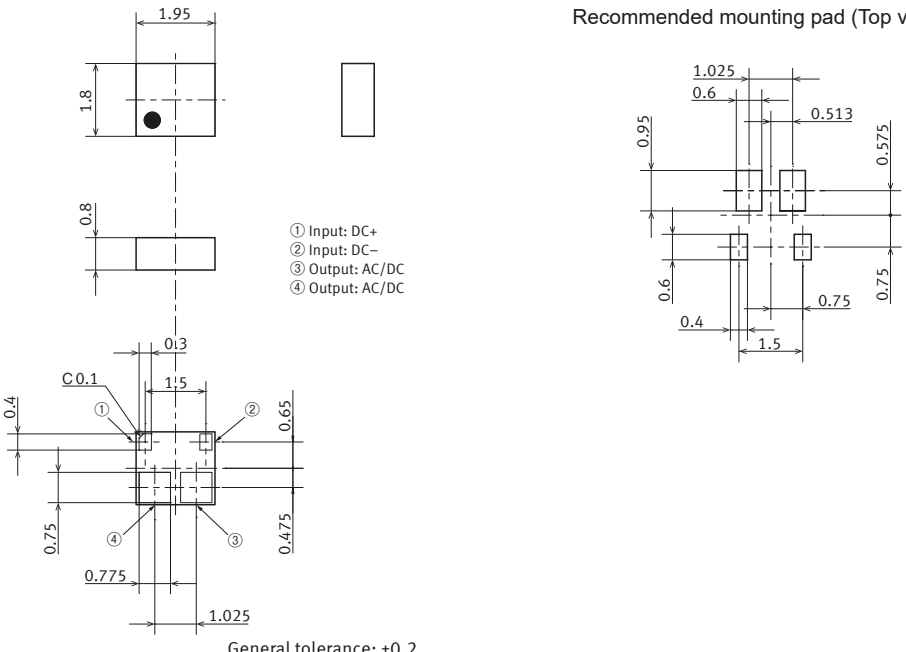
\*Random type is available by custom order.

Product name		AQ-A Relays (AC output type)			AQ-A Relays (DC output type)		
Type		Zero-cross <sup>*1</sup>			—		
Number of terminals		4					
Type		15A	25A	40A	30A	10A	
Appearance configuration <small>*Standoff height included</small>							
mm							
Features		Load current up to Max. 40 A in the series, Small Screw Terminal SSR					
Part No.		AQA211VL	AQA411VL	AQA611VL	AQAD551DL	AQAD171DL	
Load side	Load voltage	AC	75 to 250Vrms			—	
		DC	—			100V	600V
	Max. load current	40A			*4 (Heat sink) 40A		
		35A					
		30A				*5 (Heat sink) 30A	
		25A		*3 (Heat sink) 25A			
		15A	*2 (Heat sink) 15A				
10A					*6 (Heat sink) 10A		
5A							
Off state leakage current, max.	10mA			100μA			
Non-repetitive surge current	150A	250A	400A	—			
Peak load current	—	—	—	90A (100ms)	20A (100ms)		
Input side	Control voltage	4 to 32V					
	Input impedance, approx.	—					
	Drop-out voltage, min.	1V					
Operate time, max.	1/2 cycle of voltage sine wave + 1ms			10ms	5ms		
Release time, max.	1/2 cycle of voltage sine wave + 1ms			3ms	1ms		
Breakdown voltage	4,000 Vrms between input and output/2,500Vrms between input, output and case						
Snubber circuit integrated	●			—			
Reverse connection prevention diode	—			●			
LED operation indicator	●						
Safety standards	UL/C-UL, VDE			UL/C-UL, VDE			
Mass (weight) (approx.)	70g						

\*1 Random type is available by custom order. \*2 When mounting a standard heat sink (AQP-HS-J10A or AQP-HS-SJ20A) \*3 When mounting a standard heat sink (AQP-HS-30/40A)  
 \*4 When mounting a standard heat sink (AQP-HS-J25A) \*5 When mounting a standard heat sink (AQP-HS-J25A) \*6 When mounting a standard heat sink (AQP-HS-SJ20A)


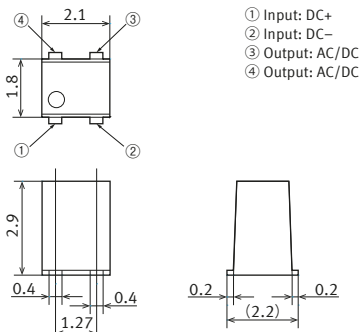


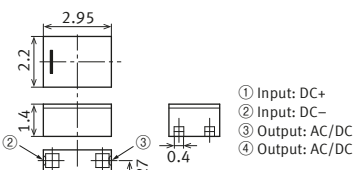










Type	Dimensions (mm)		
<b>AQY21 (DIP)</b> <b>AQY41 (DIP)</b> Series	 <p>Through hole terminal type</p> 	 <p>Surface mount terminal type</p> 	<p>PC board pattern (Bottom view)</p>  <p>Tolerance: ±0.1</p> <p>Recommended mounting pad (Top view)</p>  <p>Tolerance: ±0.1</p>
	 <p>Terminal thickness: <math>t = 0.2</math> General tolerance: ±0.1</p>	 <p>Terminal thickness: <math>t = 0.2</math> General tolerance: ±0.1</p>	
<b>AQV10 (DIP)</b> <b>AQV11 (DIP)</b> <b>AQV20 (DIP)</b> <b>AQV21 (DIP)</b> <b>AQV22 (DIP)</b> <b>AQV23 (DIP)</b> <b>AQV25 (DIP)</b> <b>AQV41 (DIP)</b> <b>AQV45 (DIP)</b> Series	 <p>Through hole terminal type</p> 	 <p>Surface mount terminal type</p> 	<p>PC board pattern (Bottom view)</p>  <p>Tolerance: ±0.1</p> <p>Recommended mounting pad (Top view)</p>  <p>Tolerance: ±0.1</p>
	 <p>Terminal thickness: <math>t = 0.25</math> General tolerance: ±0.1</p>	 <p>Terminal thickness: <math>t = 0.25</math> General tolerance: ±0.1</p>	
<b>AQV258H5 (DIP)</b> <b>AQV1122 (DIP)</b>	 <p>Through hole terminal type</p> 	 <p>Surface mount terminal type</p> 	<p>PC board pattern (Bottom view)</p>  <p>Tolerance: ±0.1</p> <p>Recommended mounting pad (Top view)</p>  <p>Tolerance: ±0.1</p>
	 <p>Terminal thickness: <math>t = 0.25</math> General tolerance: ±0.1</p>	 <p>Terminal thickness: <math>t = 0.25</math> General tolerance: ±0.1</p>	

**CAD** The CAD data of the products with a "CAD" mark can be downloaded from our Website.








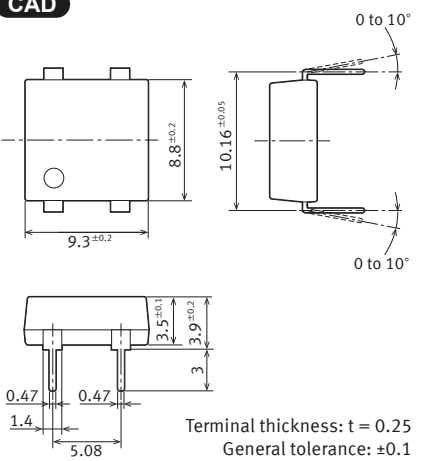

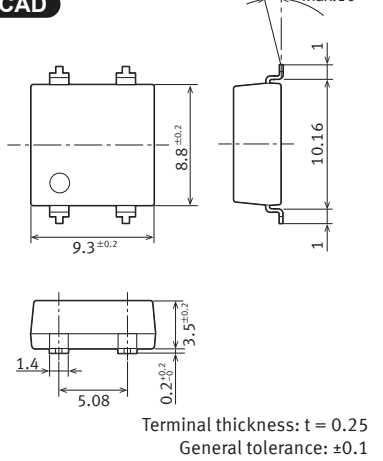



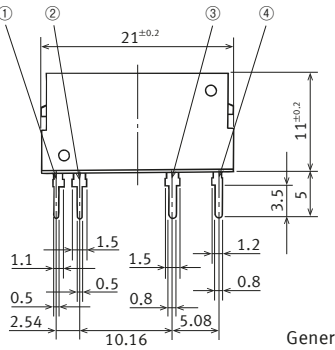

Type	Dimensions (mm)		
<p>AQW21 (DIP) AQW22 (DIP) AQW25 (DIP) AQW41 (DIP) AQW45 (DIP) AQW61 (DIP) AQW65 (DIP) Series</p>	<p>Through hole terminal type</p>  <p><b>CAD</b></p> 	<p>Surface mount terminal type</p>  <p><b>CAD</b></p> 	<p>PC board pattern (Bottom view)</p>  <p>Recommended mounting pad (Top view)</p> 
<p>AQW21*EH (DIP) AQW41*EH (DIP) AQW61*EH (DIP) Series</p>	<p>Through hole terminal type</p>  <p><b>CAD</b></p> 	<p>Surface mount terminal type</p>  <p><b>CAD</b></p> 	<p>PC board pattern (Bottom view)</p>  <p>Recommended mounting pad (Top view)</p> 
<p>AQY2C (TSON) AQY4C (TSON) Series</p>	<p>Recommended mounting pad (Top view)</p>  <p><b>CAD</b></p> 		

\*Stand for one digit.


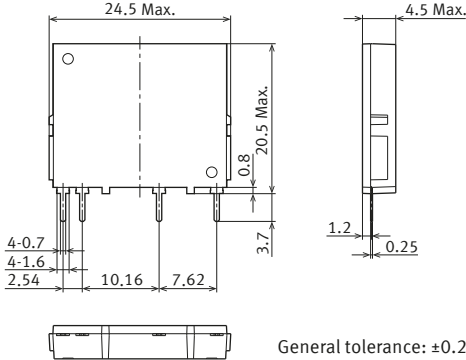



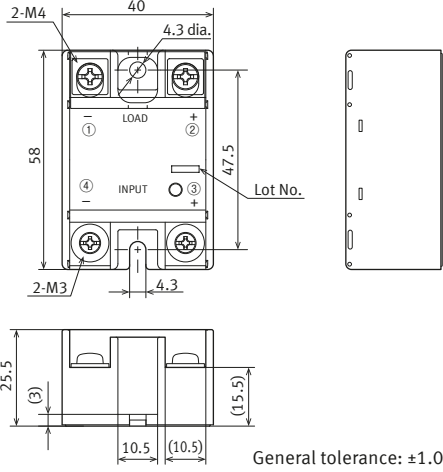
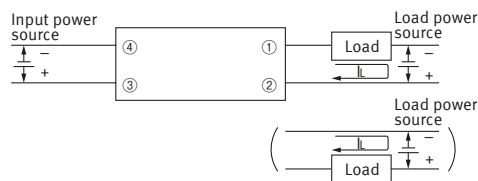

**CAD** The CAD data of the products with a "CAD" mark can be downloaded from our Website.

Type	Dimensions (mm)		
<p><b>AQY22 (VSSOP) Series</b></p>	 <p><b>CAD</b></p>	 <p>① Input: DC+ ② Input: DC- ③ Output: AC/DC ④ Output: AC/DC</p> <p>General tolerance: ±0.1</p>	<p>Recommended mounting pad (Top view)</p>  <p>Tolerance: ±0.1</p>
<p><b>AQY22 (SON) Series</b></p>	 <p><b>CAD</b></p>	 <p>① Input: DC+ ② Input: DC- ③ Output: AC/DC ④ Output: AC/DC</p> <p>General tolerance: ±0.2</p>	<p>Recommended mounting pad (Top view)</p>  <p>Tolerance: ±0.1</p>
<p><b>APV21 (SSOP) AQY22 (SSOP) Series</b></p>	 <p><b>CAD</b></p>	 <p>Terminal thickness: <math>t = 0.15</math> General tolerance: ±0.1</p>	<p>Recommended mounting pad (Top view)</p>  <p>Tolerance: ±0.1</p>
<p><b>APV11 (SOP) APV21 (SOP) AQY21 (SOP) AQY22 (SOP) AQY23 (SOP) AQY41 (SOP) Series</b></p>	 <p><b>CAD</b></p>	 <p>Terminal thickness: <math>t = 0.15</math> General tolerance: ±0.1</p>	<p>Recommended mounting pad (Top view)</p>  <p>Tolerance: ±0.1</p>
<p><b>AQV21 (SOP) AQV22 (SOP) AQV25 (SOP) AQV41 (SOP) Series</b></p>	 <p><b>CAD</b></p>	 <p>Terminal thickness: <math>t = 0.15</math> General tolerance: ±0.1</p>	<p>Recommended mounting pad (Top view)</p>  <p>Tolerance: ±0.1</p>

**CAD** The CAD data of the products with a "CAD" mark can be downloaded from our Website.





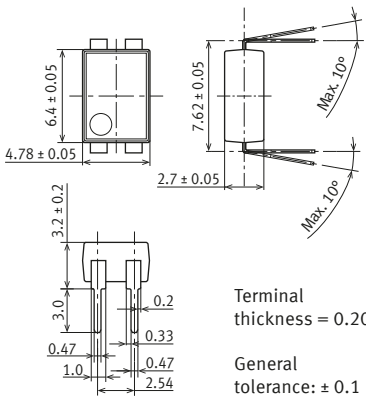
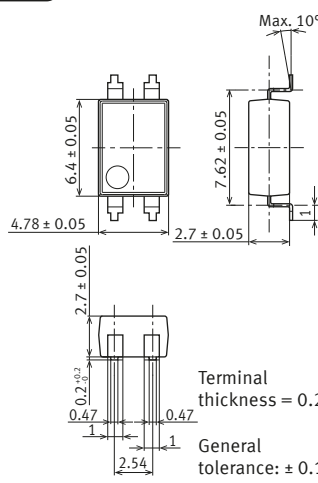


Type	Dimensions (mm)		
<p>AQW21 (SOP) AQW22 (SOP) AQW41 (SOP) AQW61 (SOP) Series</p>	 <p><b>CAD</b></p>	 <p>Terminal thickness: <math>t = 0.15</math> General tolerance: <math>\pm 0.1</math></p>	<p>Recommended mounting pad (Top view)</p>  <p>Tolerance: <math>\pm 0.1</math></p>
<p>AQS22 (SOP) Series</p>	 <p><b>CAD</b></p>	 <p>Terminal thickness: <math>t = 0.15</math> General tolerance: <math>\pm 0.1</math></p>	<p>Recommended mounting pad (Top view)</p>  <p>Tolerance: <math>\pm 0.1</math></p>
<p>AQY27 (Power-DIP) Series</p>	<p>Through hole terminal type</p>  <p><b>CAD</b></p>  <p>Terminal thickness: <math>t = 0.25</math> General tolerance: <math>\pm 0.1</math></p>	<p>Surface mount terminal type</p>  <p><b>CAD</b></p>  <p>Terminal thickness: <math>t = 0.25</math> General tolerance: <math>\pm 0.1</math></p>	<p>PC board pattern (Bottom view)</p>  <p>Tolerance: <math>\pm 0.1</math></p> <p>Recommended mounting pad (Top view)</p>  <p>Tolerance: <math>\pm 0.1</math></p>
<p>AQZ10 (SIL) AQZ20 (SIL) AQZ40 (SIL) Series</p>	 <p><b>CAD</b></p>	 <p>AC/DC type ① Input: DC- ② Input: DC+ ③ Output: DC or AC ④ Output: DC or AC</p> <p>DC type ① Input: DC- ② Input: DC+ ③ Output: DC- ④ Output: DC+</p> <p>General tolerance: <math>\pm 0.1</math></p>	<p>PC board pattern (Bottom view)</p>  <p>Tolerance: <math>\pm 0.1</math></p>

**CAD** The CAD data of the products with a "CAD" mark can be downloaded from our Website.

Type	Dimensions (mm)	
<p><b>AQZ19 (SIL) Series</b></p>  <p><b>CAD</b></p>	 <p>General tolerance: ±0.2</p>	<p>PC board pattern (Bottom view)</p>  <p>Tolerance: ±0.1</p> <p>Schematic</p> 
<p><b>AQAD Series</b></p>  <p><b>CAD</b></p>	 <p>General tolerance: ±1.0</p>	<p>Schematic</p>  <p>Mounting dimensions</p> 

**CAD** The CAD data of the products with a "CAD" mark can be downloaded from our Website.


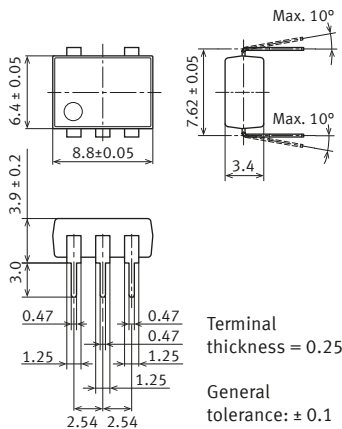

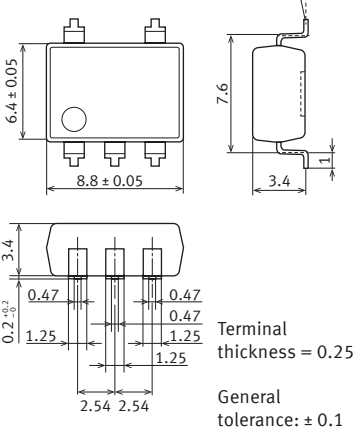



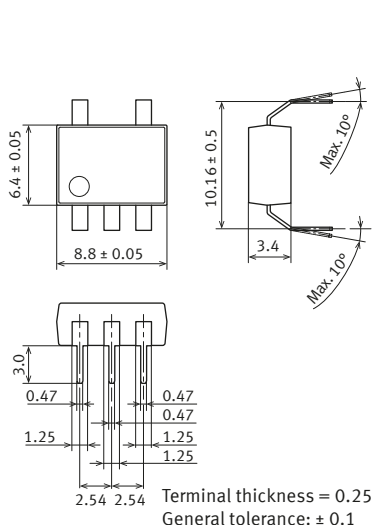

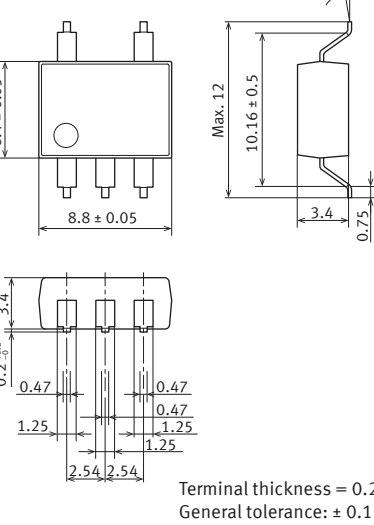


# Phototriac Coupler Dimensions

Type	Dimensions (mm)		
<p>   <b>CAD</b>            APT1211S (SOP)            APT1221S (SOP)            APT1231S (SOP)            Series         </p>	<p style="text-align: right;">Recommended mounting pad (TOP VIEW)</p>  		
<p>   <b>CAD</b>            APT1211 (A)            (DIP4)            APT1221 (A)            (DIP4)            APT1231 (A)            (DIP4)            Series         </p>	<p>Through hole terminal type</p>  <p>Terminal thickness = 0.20 General tolerance: ± 0.1</p>	<p>Surface mount terminal type</p>  <p>Terminal thickness = 0.20 General tolerance: ± 0.1</p>	<p>PC board pattern (Bottom view)</p>  <p>Tolerance: ± 0.1</p> <p>Recommended mounting pad (Top view)</p>  <p>Tolerance: ± 0.1</p>

**CAD** The CAD data of the products with a "CAD" mark can be downloaded from our Website.



# Phototriac Coupler Dimensions

Type	Dimensions (mm)		
<p>APT1212 (A) (DIP6) APT1222 (A) (DIP6) APT1232 (A) (DIP6) Series</p>	<p>Through hole terminal type</p>  <p><b>CAD</b></p>  <p>Terminal thickness = 0.25 General tolerance: ± 0.1</p>	<p>Surface mount terminal type</p>  <p><b>CAD</b></p>  <p>Terminal thickness = 0.25 General tolerance: ± 0.1</p>	<p>PC board pattern (Bottom view)</p>  <p>Tolerance: ± 0.1</p> <p>Recommended mounting pad (Top view)</p>  <p>Tolerance: ± 0.1</p>
<p>APT1212W (A) (DIP6WIDE) APT1222W (A) (DIP6WIDE) APT1232W (A) (DIP6WIDE) Series</p>	<p>Through hole terminal type</p>  <p><b>CAD</b></p>  <p>Terminal thickness = 0.25 General tolerance: ± 0.1</p>	<p>Surface mount terminal type</p>  <p><b>CAD</b></p>  <p>Terminal thickness = 0.25 General tolerance: ± 0.1</p>	<p>PC board pattern (Bottom view)</p>  <p>Tolerance: ± 0.1</p> <p>Recommended mounting pad (Top view)</p>  <p>Tolerance: ± 0.1</p>

**CAD** The CAD data of the products with a "CAD" mark can be downloaded from our Website.

Please refer to "the latest product specifications" when designing your product.

- Requests to customers:  
<https://industrial.panasonic.com/ac/e/salespolicies/>

"PhotoMOS<sup>®</sup>", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Holdings Corporation. Recognized in Japan, the United States, all member states of European Union and the other countries.

■Global Sales Network Information: [industrial.panasonic.com/ac/e/salesnetwork](https://industrial.panasonic.com/ac/e/salesnetwork)

**Panasonic**  
INDUSTRY

**Panasonic Industry Co., Ltd.**

Electromechanical Control Business Division  
■1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan  
[industrial.panasonic.com/ac/e/](https://industrial.panasonic.com/ac/e/)