


Manganese Lithium Coin Batteries (ML series): Individual Specifications

ML920


□ Dimensions(mm)

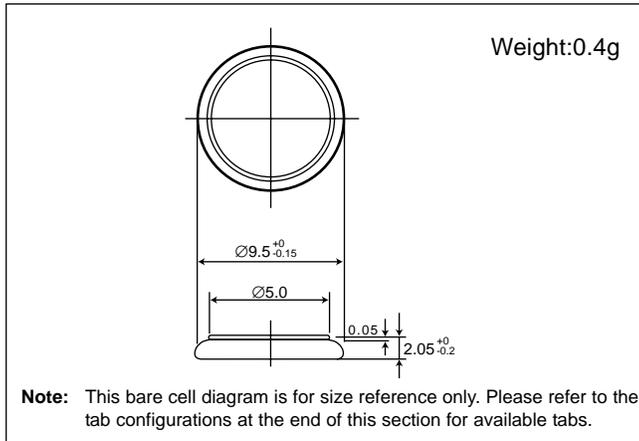


□ Specification

| | |
|-------------------------------|-----------|
| Nominal voltage (V) | 3 |
| Nominal capacity (mAh) | 11.0 |
| Continuous standard load (mA) | 0.03 |
| Operating temperature (C) | -20 ~ +60 |

□ Discharge characteristics

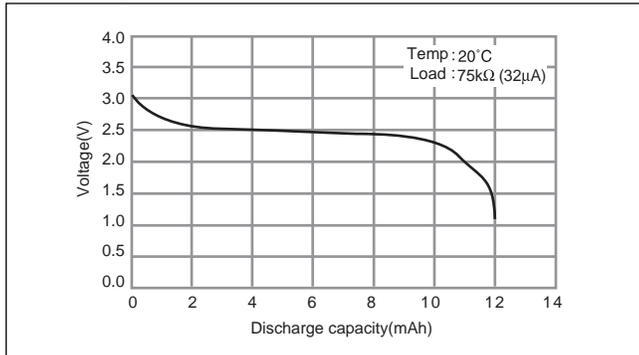


□ Consumption current vs. Duration time

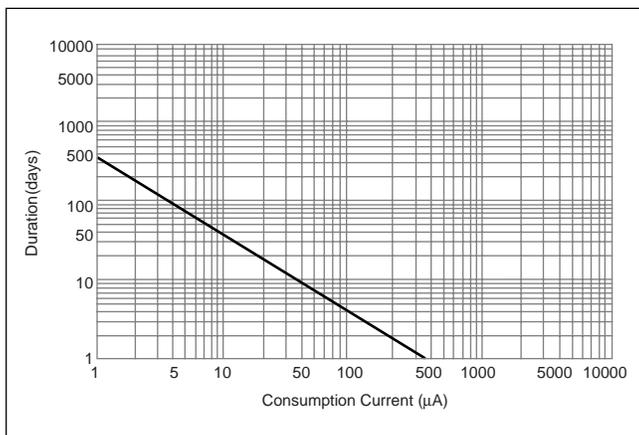

ML1220


□ Dimensions(mm)

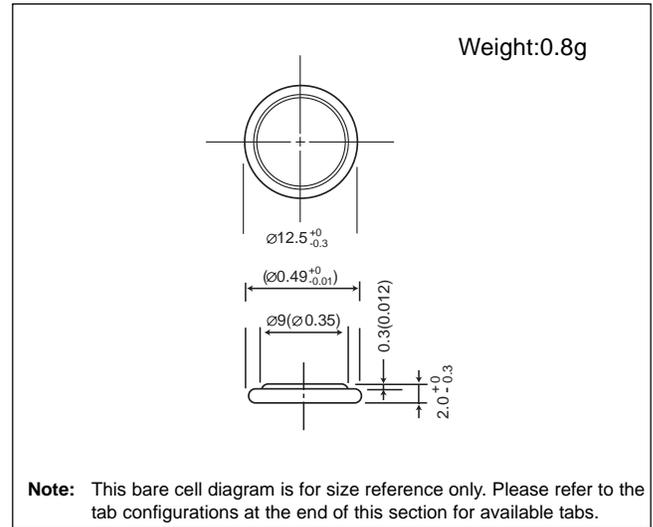

□ Specification

| | |
|-------------------------------|-----------|
| Nominal voltage (V) | 3 |
| Nominal capacity (mAh) | 17.0 |
| Continuous standard load (mA) | 0.03 |
| Operating temperature (C) | -20 ~ +60 |

□ Discharge characteristics

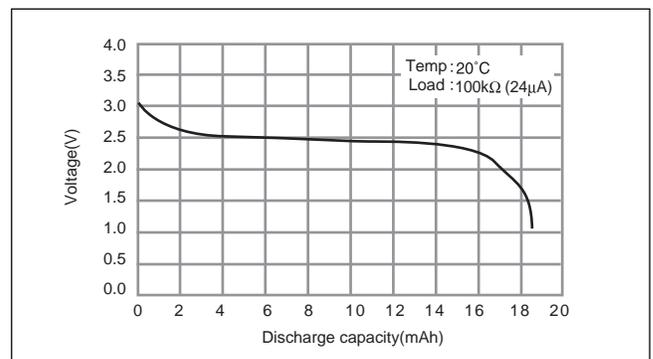

□ Consumption current vs. Duration time

