

# BR435

# LITHIUM POLY-CARBONMONOFLUORIDE




### Features & Benefits

- High voltage of 3 volts
- Extremely small self-discharge for long service and shelf life
- Compact and lightweight with extremely high energy density per unit weight
- Strong load pulse characteristics


### Specifications

Nominal Capacity:	50 mAh
Nominal Voltage:	3V
Weight:	Approximately 0.85g
Operating Temperature:	-20°C - +60°C


### Dimensions

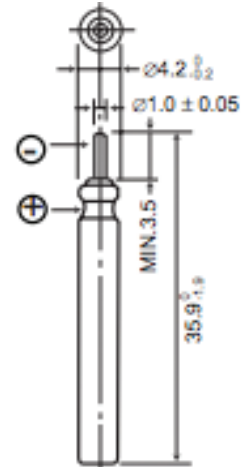


### Temperature Characteristics

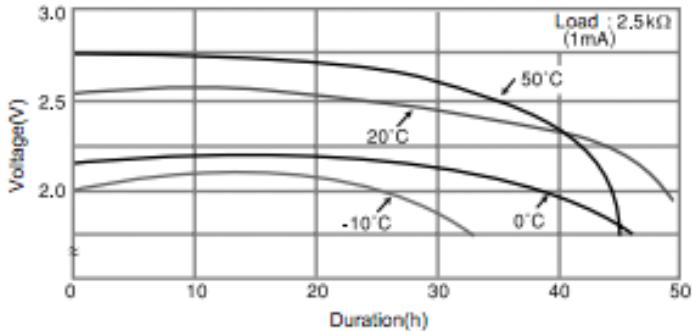

### Capacity vs. Load Resistance

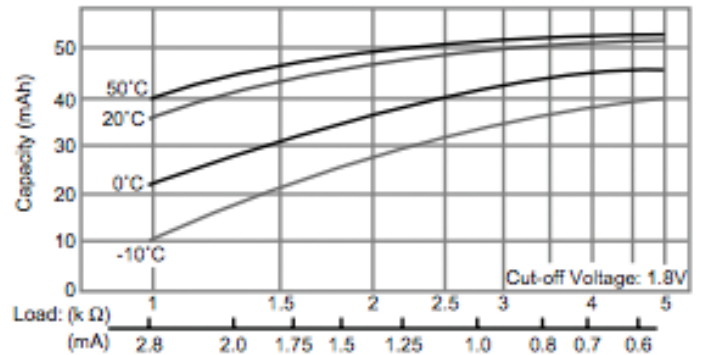

### Operating Voltage vs. Load Resistance (voltage at 50% discharge depth)

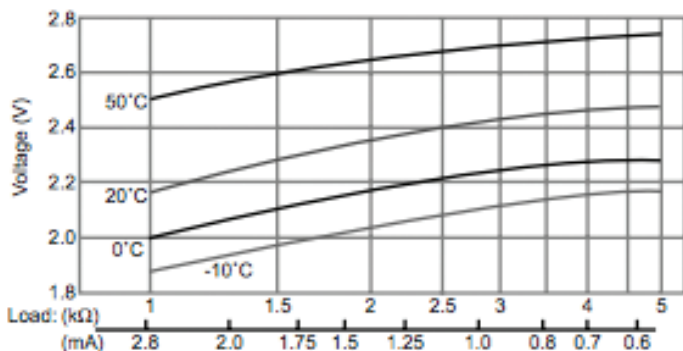

For more information on how Panasonic can assist you with your battery power solution needs call **877-726-2228**, visit [www.na.industrial.panasonic.com/products/batteries](http://www.na.industrial.panasonic.com/products/batteries) or e-mail [oembatteries@us.panasonic.com](mailto:oembatteries@us.panasonic.com).

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.