

BK200AAB

Nickel Metal Hydride

Features & Benefits

- Efficient, lower cost charge requirements with excellent cycle life.
- Options for broader operating temperatures.
- Versatile Applications including: Security, Medical, Automotive and Industrial Infrastructure.
- Higher levels of energy density, demanded by today's electronics.
- No transportation issues.
- Cells designed specifically to meet different, rigorous environments.

Specifications

Nominal

Capacity: 2000 mAh Typical

Nominal Voltage: 1.2V

Weight: Approximately 29g


Operating Temperature: 0°C - +45°C

Dimensions



Unit: mm

Typical Charge Characteristics

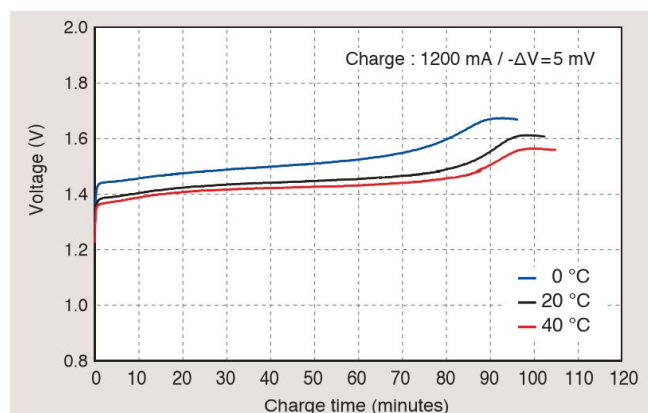

Typical Discharge Characteristics

